


NOTES:

1. MATERIALS AND FINISHES:
BODY -BRASS, NICKEL PLATING
CONTACT - BeCu , SILVER PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 2 GHz
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 5575, AND DATE CODE"
5. MAX. PANEL THICKNESS=3.96mm

THIRD ANGLE PROJ.




REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	OFFICIAL ENG. RELEASE TO MFG.	3-7-63	8004	
Y	ADD SHEET 2	22-Oct-12	49076	DH

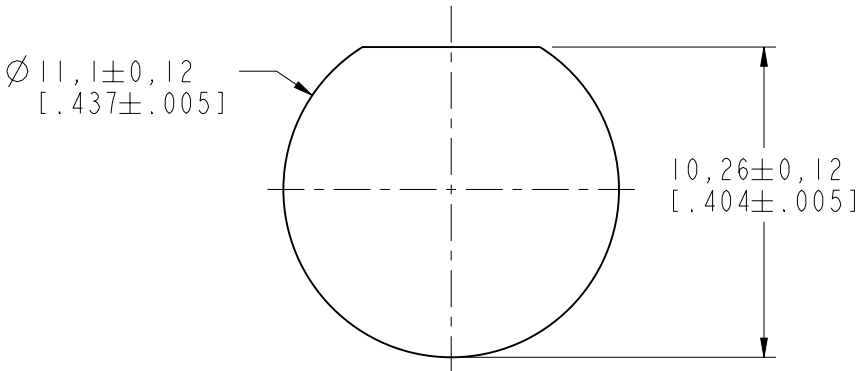

RECOMMENDED MOUNTING
HOLE DIMENSIONS

SCALE 4.000

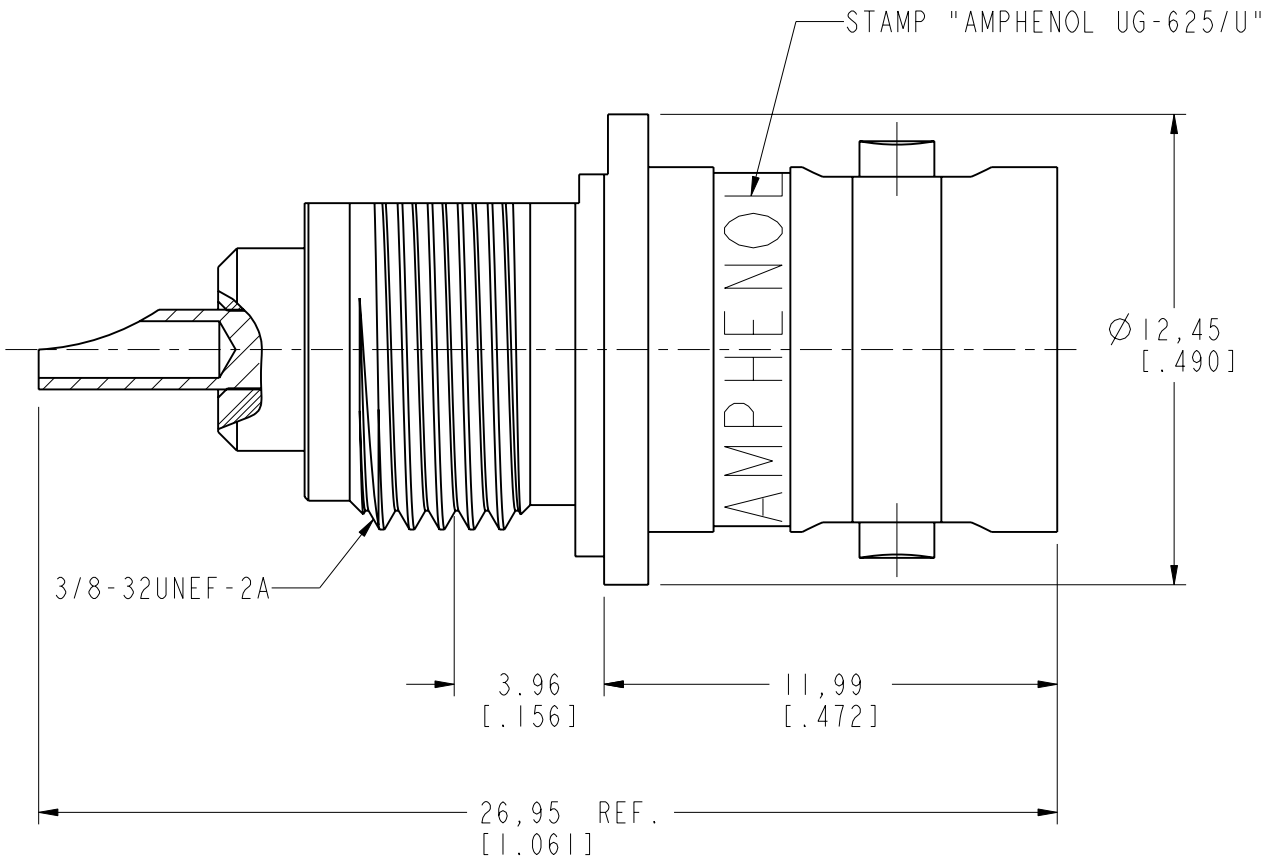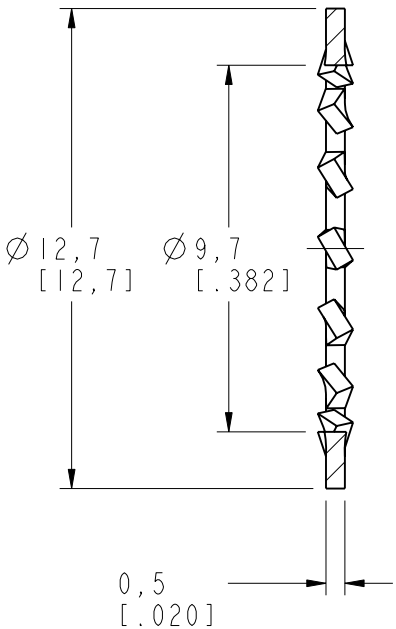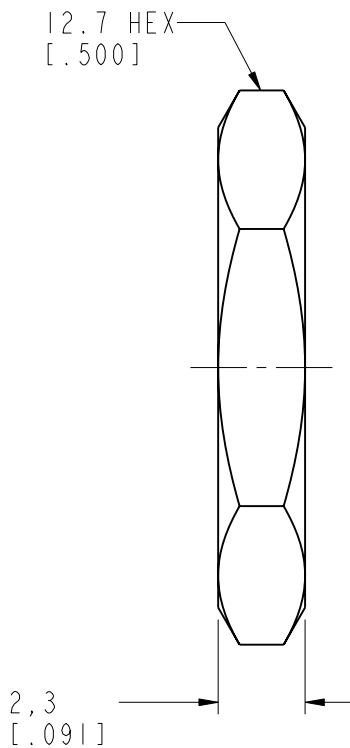

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°	MATERIAL -	DRAWN R.MAO	DATE 14-Jun-12	TITLE BNC BULKHEAD RECEPT. JACK FRONT MOUNT (FOR UG-625/U)	Amphenol RF www.amphenolrf.com	
		ENGINEER S.LI	DATE 14-Jun-12			
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	APPROVED S.HSIEH	DATE 14-Jun-12	SCALE: 5.0:1.0	SHEET 2 OF 2	DRAWING NO. 5575
	CONFIGURATION LEVEL:	CAD FILE		DWG SIZE B	REV Y	ITEM NO. 5575
	FINISH					PART NO. 5575