


DI

1 TOOL CONTROL UNIT

Quick start Guide
English

www.jbctools.com


WORKING

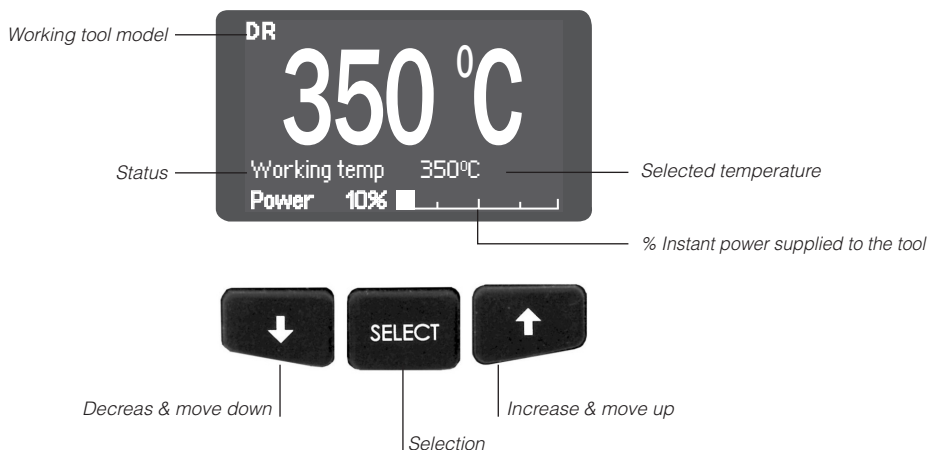

SETTINGS

Press **SELECT** during 2 seconds
to enter **SETTINGS**

ORIGINAL PIN: 0105

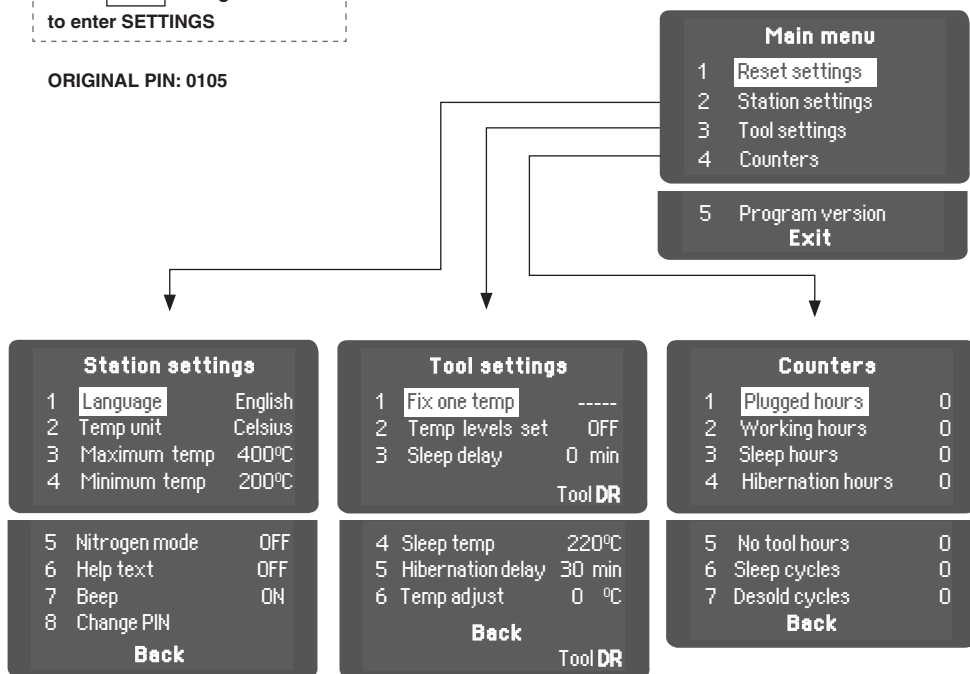

THECNICAL SPECIFICATIONS

- Temperature selection from 90 to 450°C ($\pm 5\%$).
- Power: 75W.
- Safety transformer, mains separator and double isolation, with integrated temperature protection fuse.
- **DI-2A** 230V control unit. Input: 230V 50Hz. Output: 24V.
- **DI-1A** 120V control unit. Input: 100V 60Hz. Output: 24V.
- Total weight of unit: 2 Kg.
- Complies with CE standards on electrical safety, electromagnetic compatibility and ESD protected housing "skin effect".
- RoHS compliant.
- Equipotential connector and the tool tip are connected to station mains ground supply for ESD protection.



This product should be
thrown in the garbage.

JBC

ENGLISH / WARRANTY

The JBC 2 years warranty, guarantees this equipment against all manufacturing defects, covering the replacement of defective parts and all necessary labour.

Warranty does not cover product wear due to use or mis-use.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased enclosing this, fully filled in, sheet.

SERIAL N°

STAMP OF DEALER

DATE OF PURCHASE

MORE INFORMATION

www.jbctools.com

MANUFACTURED BY

JBC Industrias, S.A.

Ramón y Cajal, 3
08750 MOLINS DE REI
BARCELONA - SPAIN
Tel.: +34 93 325 32 00
Fax: +34 93 680 49 70

www.jbctools.com
info@jbctools.com