


REVISION RECORD				
REV	ECO	DESCRIPTION	DRAFT	DATE
△		Drawing emend	WF	01/06/06
△		增加VDE、CE认证标志	LJH	01/14/08


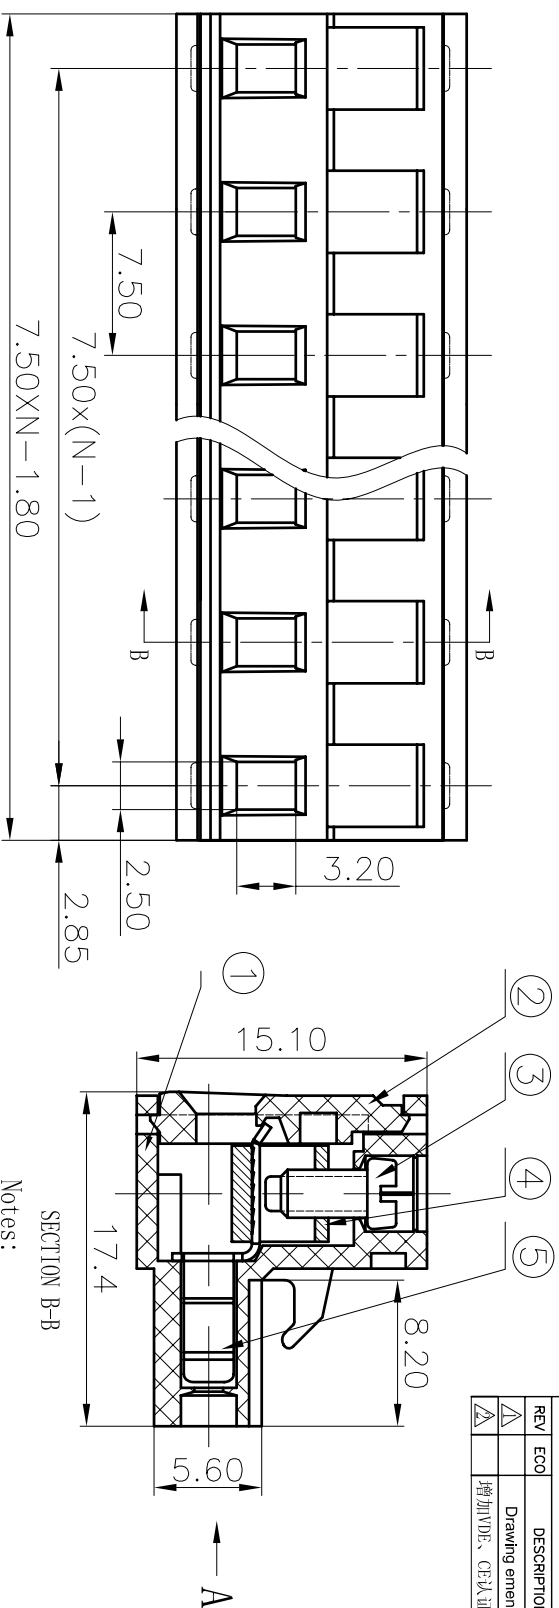


SECTION B-B

Notes:

1. Pitch: 7.50mm Poles:2-12p
2. Rated voltage/current:UL 300V/15A
VDE 400V/20A
3. Insulation resistance: 5000M Ω /DC1000V
4. Withstanding voltage: AC2000V/1Min
5. Wire range: 28-12AWG 2.5mm²
6. Temp. Range: -40° C~+105° C
7. Torque: 4.08kgf.cm(3.61b. in)
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
over 6	over 10	over 30	over 60	over 100	over 150	⌋	
to 6	to 10	to 30	to 60	to 100	to 150		
to 10	to 24	to 30	to 60	to 100	to 150	⌋	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±1.0	0.05/0.10

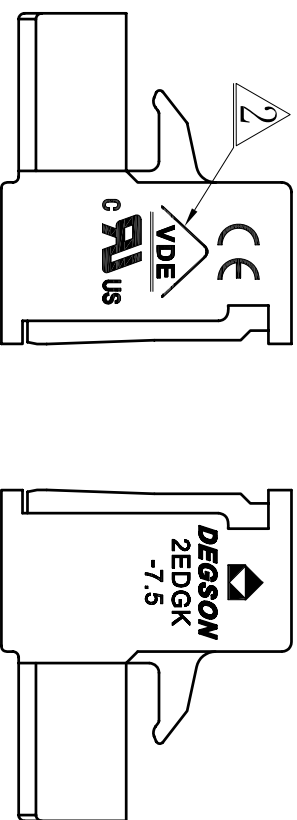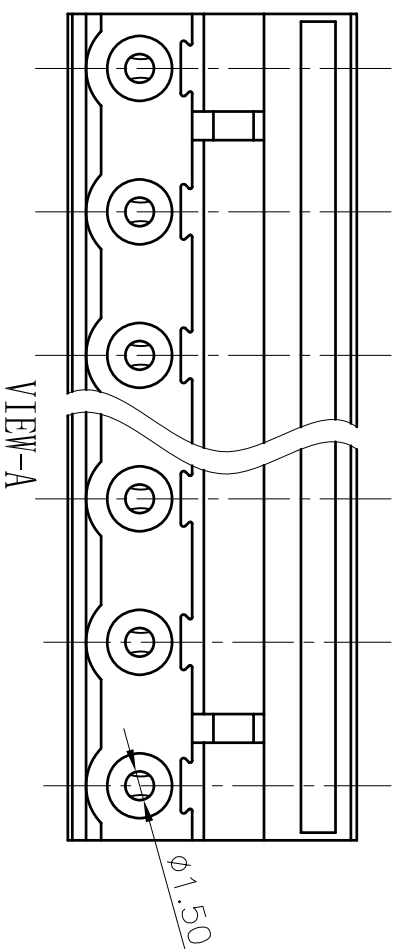

5	2EDG Contact	1005B00010 (H)	XY	Phosphor bronze	Ni plated
4	DC128 Brass Cage	X000000020 (H)	XY	Brass	Ni plated
3	2EDG "—" Screws-M2.5	S0000001370 (H)	XY	Steel	Cp ³ Zn
2	2EDGK-7.5-Cover	1017C01XXA (H)	1	Pl66	UL94V-0

1	2EDGK-7.5-Housing		1017A01XXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
← MM → (INCH)		DEPTH	HEIGHT	DATE	10/02/05	
TOLERANCES EXCEPT AS NOTED		CHD	WRO	DATE		
MM		MM	MM	DATE		
.0 ±				APPL		
.00 ±				DATE		
.000 ±						
ANGLES ± °		MATERIAL :				
G.C :		NAME				
FINISH :		2EDGK-7.5-XXP-1Y-00A(H)				
DRAWING NO. 2EDGK-7.5-ED2		DRAWING NO. 2EDGK-7.5-ED2				
/PART NO.		SIZE				
		REV				
		A3				
		01/11/08				
THIRD ANGLE PROJECTION		SCALE : 1:1				
		DO NOT SCALE DRAWING				
		SHEET 1 OF 1				