



2									
LOC	DIST	REVISIONS							
AL	2	P	LTR	DESCRIPTION			DATE	DWN	APVD
			AC	REVISED BY ES00-0040-02			02APR02	J.L	J.L
			AD	REVISED BY ES00-05-0095			14/DEC/05	J.L	JL
			AD1	REVISED PER ECO-10-000444			09JAN10	KK	AEG
			AD2	ECR-10-009742			29JUN10	RK	SRE
			AD3	ADDED NEW DASH 3-160759-4			22MAR11	J.S.	L.B.
			AD4	UPDATED TE CONNECTIVITY LOGO			04APR2011	J.S.	L.B.

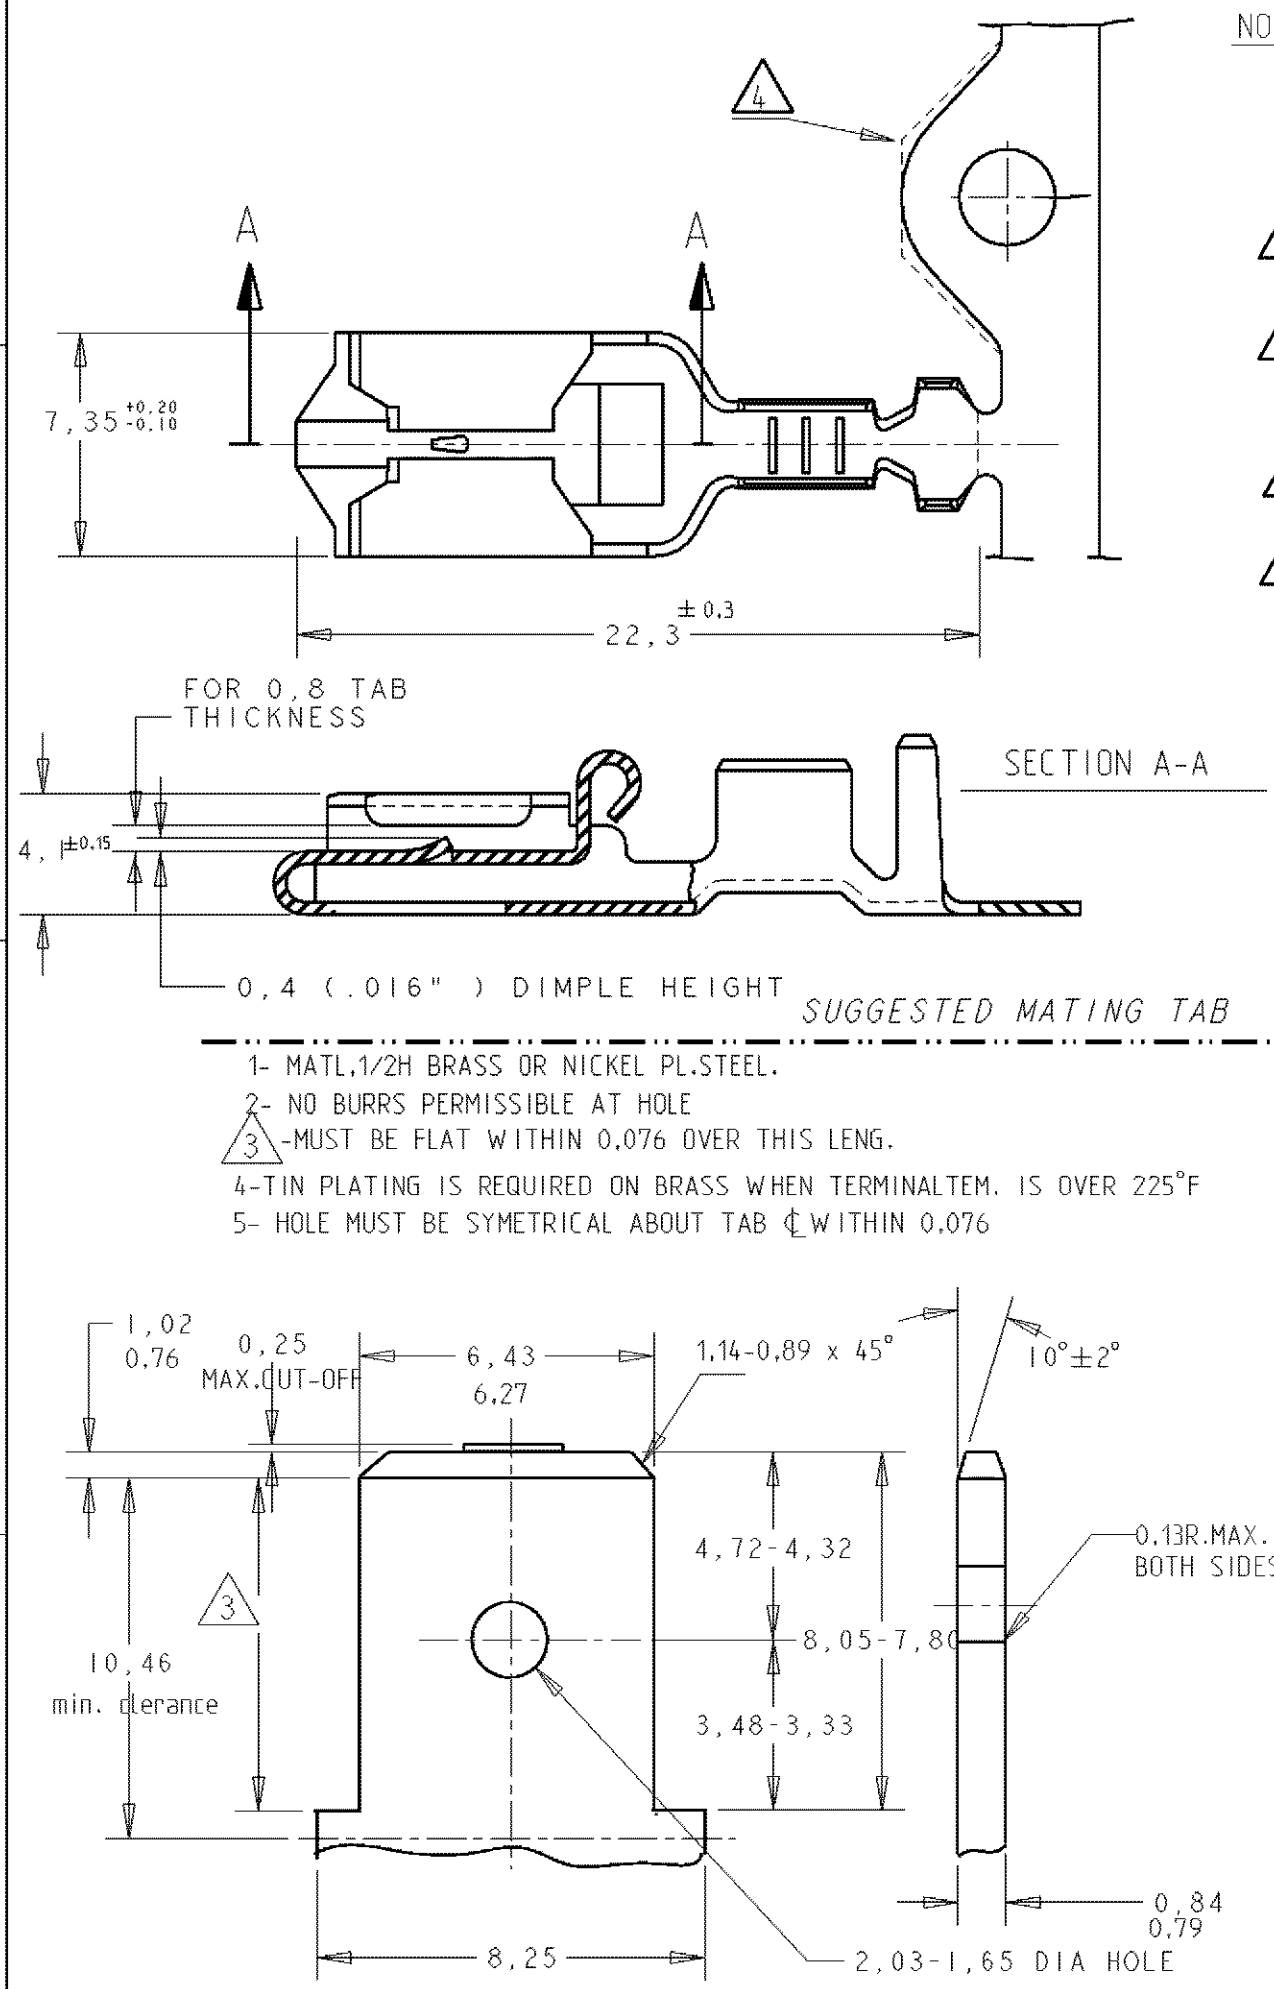

- NOTES:
- 1 FOR USE ON STANDARD APPLICATOR (RIGHT-LEFT FEED)
 - 2 FOR USE ON MINIATURE APPLICATOR (LEFT-RIGHT FEED)
 - 3 FOR USE ON MINIATURE APPLICATOR (LEFT-RIGHT FEED) AMPOMATOR APPLICATION.
 - 4 CONFIGURATION OF CARRIER-STRIP OPTIONAL
 - 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

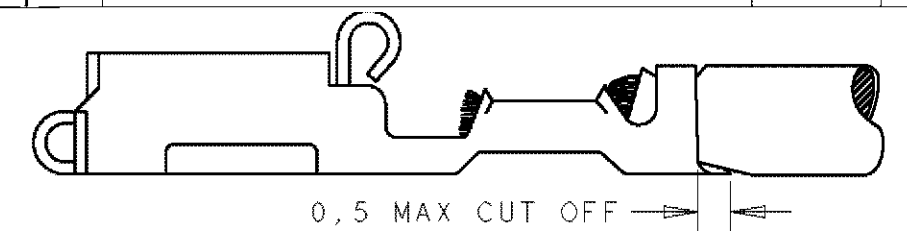

UNPLATED & DECREASED		NICKEL SILVER		3-160759-4
OBSOLETE		NICKEL SILVER		3-160759-3
OBSOLETE		NICKEL SILVER		3-160759-3
OBSOLETE		TIN PLATED	PH.BRONZE	3-160759-0
OBSOLETE		UNPLATED	NICKEL SILVER	2-160759-9
OBSOLETE		HOT DIP PRETIN.	PH.BRONZE	2-160759-8
OBSOLETE		TIN-LEAD	PH.BRONZE	2-160759-7
OBSOLETE		SILVERPLATED	BRASS	2-160759-6
OBSOLETE		UNPLATED	BRASS	2-160759-5
OBSOLETE		HOT DIP PRETIN.	BRASS	2-160759-4
OBSOLETE		TIN PLATED	BRASS	2-160759-3
OBSOLETE		NICKEL PLATED	PH.BRONZE	2-160759-2
OBSOLETE		NICKEL PLATED	PH.BRONZE	2-160759-1
OBSOLETE		SILVERPLATED	PH.BRONZE	2-160759-0
OBSOLETE		SILVERPLATED	PH.BRONZE	1-160759-9
OBSOLETE		HOT DIP PRETIN.	PH.BRONZE	1-160759-4
OBSOLETE		HOT DIP PRETIN.	BRASS	1-160759-3
OBSOLETE		HOT DIP PRETIN.	PH.BRONZE	1-160759-2
OBSOLETE		HOT DIP PRETIN.	BRASS	1-160759-1
OBSOLETE		PRETINNED	PH.BRONZE	1-160759-0
OBSOLETE		TIN PLATED	PH.BRONZE	0-160759-9
OBSOLETE		TIN PLATED	BRASS	0-160759-8
OBSOLETE		UNPLATED	PH.BRONZE	0-160759-7
OBSOLETE		UNPLATED	BRASS	0-160759-6
OBSOLETE		PRETINNED	PH.BRONZE	0-160759-5
OBSOLETE		TIN PLATED	PH.BRONZE	0-160759-4
OBSOLETE		TIN PLATED	BRASS	0-160759-3
OBSOLETE		UNPLATED	PH.BRONZE	0-160759-2
OBSOLETE		UNPLATED	BRASS	0-160759-1
FINISH		MATERIAL		PARTNUMBER

AMP 1470-19 REV 31MAR2000

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±0.3 GENERAL

3 PLC ±

4 PLC ±

ANGLES ±

FINISH SEE TABLE

MATERIAL

SEE TABLE

DWN J.L 16-11-95

CHK A.BIJNEN 17-11-95

APVD -

PRODUCT SPEC 108-3017

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

POSITIVE LOCK REC. .250 (6,35) SERIES

SIZE A3 CAGE CODE 00779 DRAWING NO C=160759

RESTRICTED TO -

SCALE - SHEET OF REV AD4