







REV.	DATE	DESCRIPTION
A	03/27/05	UPDATE DRAWING FORMAT



RECOMMENDED
MOUNTING HOLE

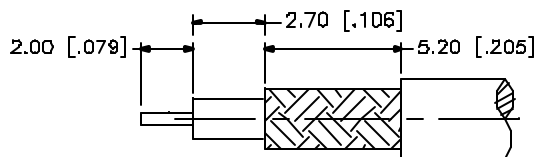

RECOMMENDED CABLE
STRIPPING DIMS.

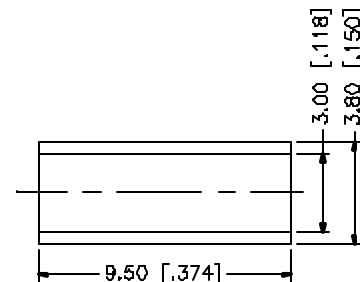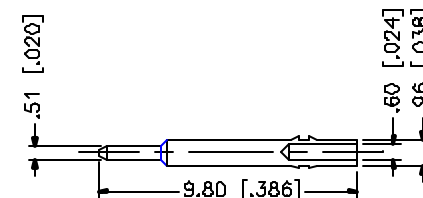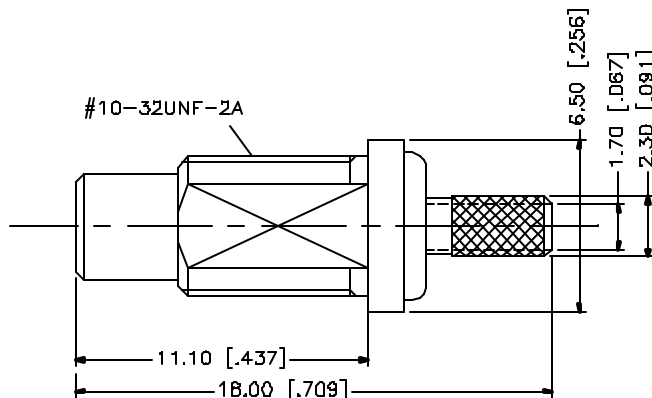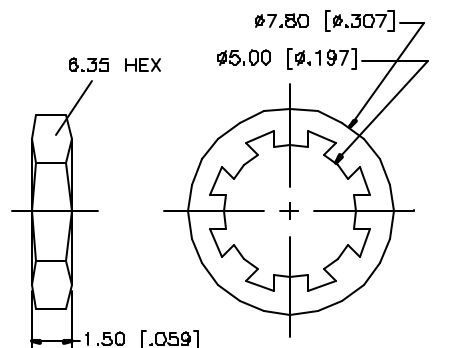

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. MAX. PANEL THICKNESS = 2.4mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8				1		DRAWN	G.R.S.	03/27/05										
7	HEAT SHRINK TUBE			1		CHECKED												
6	HEX NUT	BRASS	GOLD	1		ISSUED			PART DESCRIPTION									
5	LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1		SMC BULKHEAD CRIMP JACK (FOR RG-174/U, 188A/U, 316/U)									
4	FERRULE	COPPER	GOLD	1				PART NO.										
3	CONTACT PIN	BRASS	GOLD	1				152105										
2	INSULATOR	TEFLON	NATURAL	1		CAD FILE		C:/152/152105.DWG		DWG. NO.		152105.DWG	REV.	A	SIZE	A	SCALE	NA
1	BODY	BRASS	GOLD	1														
						DESCRIPTION		MATERIAL		FINISH		QTY						