


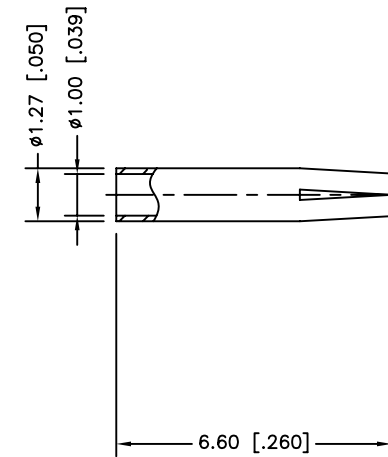


REV.	DATE	ECR NO.	DESCRIPTION
A	03/06/05	XXXXXX	UPDATE DRAWING FORMAT
B	04/21/12	XXXXXX	ADD NOTES

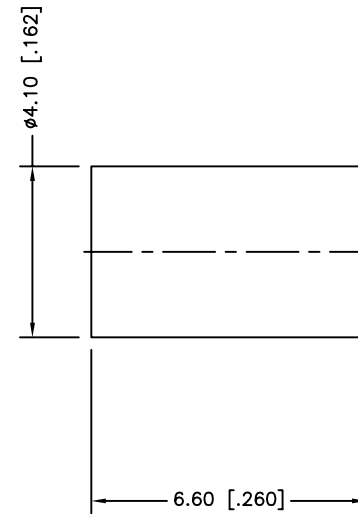

RECOMMENDED
CABLE STRIPPING DIM'S

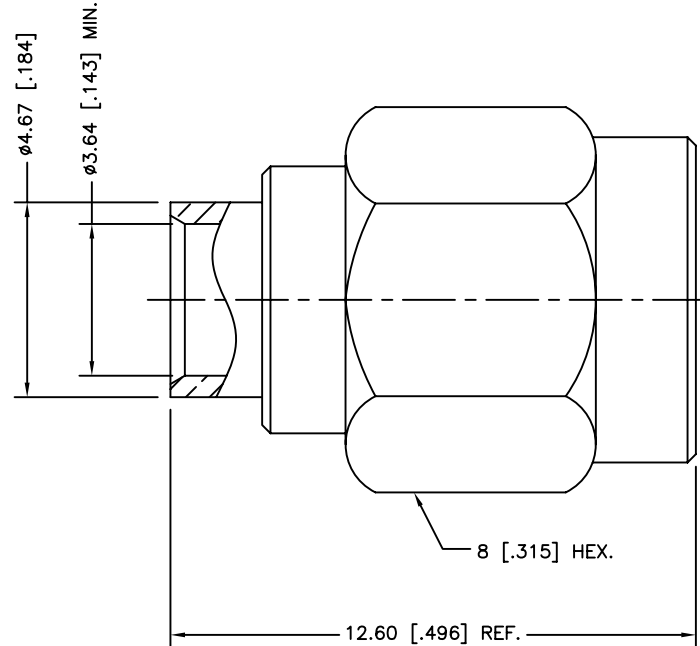

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0–18 GHz
3. VSWR(RETURN LOSS): 1.3, MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS, MIN.
5. CONTACT PIN TO SOLDER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex			
					DRAWN	M.ZHANG	04/21/12					
6	CONTACT PIN	BERYLLIUM COPPER	GOLD	1	CHECKED			PART DESCRIPTION SMA REVERSE POLARITY STRAIGHT PLUG (FOR .141” SEMI-RIGID CABLE)				
5	INSULATOR	PTFE	NATURAL	1	ISSUED							
4	GASKET	SILICON RUBBER	RED	1	SHEET	1 OF 1		PART NO. 132102RP				
3	RETAINING RING	SUS 304	NATURAL	1								
2	BODY	BRASS	GOLD	1			DWG. NO. 132102RP.DWG					
1	SHELL	BRASS	GOLD	1								
DESCRIPTION		MATERIAL	FINISH	QTY	CAD FILE C:/CONNEX/132102RP.DWG		REV. B	SIZE A	SCALE NA			