





1.CABLE:UL2725,USB CABLE,28AWG7/0.12mm>X1PAIRS
+24AWG7/0.2mm>X2C,TIN COPPER
SHIELD:AL-FDIL+7/0.1mmDRAIN WIRE+2X16/0.1mm
BRAID TIN COPPER
JACKET:PVC,D:4.8mm±0.2mm,COLOR:GREY COLOR
2.CONNECTOR:2 PCS USB A SOLDER FEMALE GOLD FLASH
3.HOOD:MODULING TYPE,COLOR:GREY
4.2 PCS 5 PIN IDE FEMALE,COLOR:BLACK
5.USB A FEMALE BRACKET
6.4 SETS NUTS
7.2 PCS TUBE
8.Fill ROHS Guideline
9.ELECTRONIC TEST:100% OPEN SHORT+MISS WIRE TEST

PART NO	AK674	SHEET NO	1	 THIRD ANGLE PROJECTION			
TITLE:2 *USB A FEMALE TO 2* 5P IDE FEMALE L:0.25M,UL2725,GREY COLOR				SCALE	N.T.S	DRAWN BY & DATE	
				SIZE	A4	CHECKED BY & DATE	
				UNIT			
DWN NO	D-AK674	☒ mm ☐ INCH		APPROVED BY & DATE			

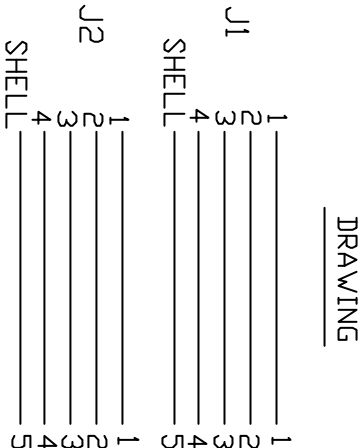

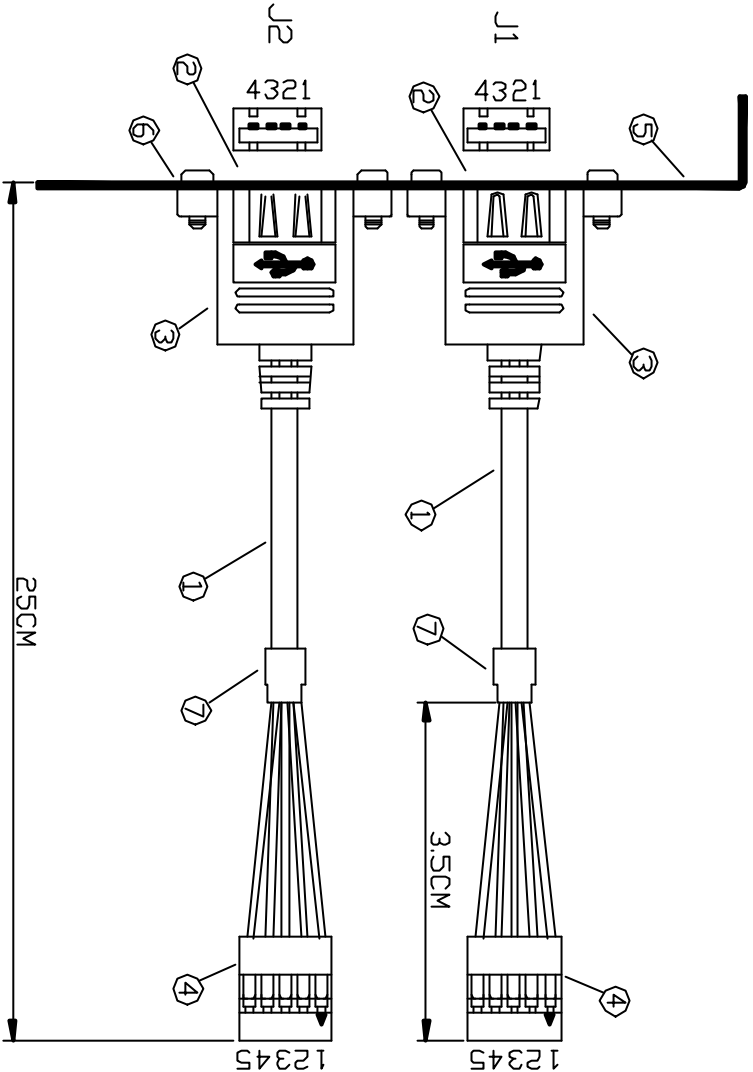