


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NO.*	RECOMMENDED FASTENER	'A'	'B'	'C'	'D'	'E'	'F'	'G' *REF*	'H' *REF*	'I' *REF*	USE WITH THESE CABLE TIE CROSS SECTIONS	WEIGHT (g) lbs/100 pcs.
TM3S8	#8 (M4) SCREW	0.863 [21.9]	0.610 [15.5]	0.373 [9.4]	0.320 [8.1] ±.020 [0.5]	0.088 [2.2] ±.020 [0.5]	0.208 [5.3]	0.105 [2.7]	0.325	0.180	MINIATURE INTERMEDIATE STANDARD LT. HEAVY	0.369 [167.5]
TM3S10	#10 (M5) SCREW							0.115 [2.9]	0.385	0.200		0.363 [165.0]
TM3S25	1/4" (M6) SCREW	0.879 [22.3]	0.629 [16.0]	0.379 [9.6]			0.210 [5.3]	0.155 [3.9]	0.506	0.262		0.296 [134.5]
TM3S2510	#10 (M5) SCREW	0.873 [22.2]	0.620 [15.7]				0.212 [5.4]	0.120 [3.0]	0.480	0.200		0.321 [145.5]

NOTES:


- *1. SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR.
SEE www.panduit.com FOR TEFZEL, METAL DETECTABLE AND PEEK MOUNT DRAWINGS.
2. HOLE DIMENSIONS SHOULD ACCOMMODATE SPECIFIED RECOMMENDED FASTENER.

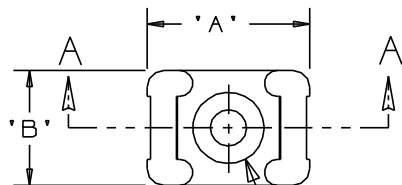

SEE NOTE 2

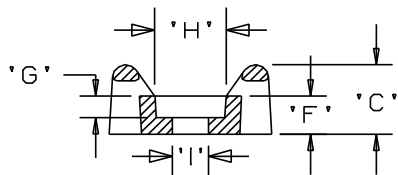

SECTION A - A



DIMENSIONS IN BRACKETS ARE METRIC [mm]

TITLE			
TM3S - TIE MOUNT			
CUSTOMER DRAWING			
ITEM REVISION NAME		10B015KD/00	
DATASET FILE NAME		10B015KD_DC/00 - GB0239EN_REV12	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: [IN [mm]]		PANDUIT	
.X ± .1 [2.54] .XXX ± .005 [0.127] .XX ± .01 [0.25] ANGLES ± 5°			
DRAWN BY AJV		DATE 12/17/96	CHK NONE
REV 12		DATE 6/27/13	BY BWG
CHK JADE		APR RTF	DESCRIPTION REVISED CHART AND NOTE 1. SEE ECN FOR FULL DETAILS.
ECN GB0239EN/12		MATERIAL: SEE NOTE 1	
THIRD ANGLE PROJECTION		DRAWING NUMBER: GB0239EN	
SHT 1 OF 1		SIZE A	