

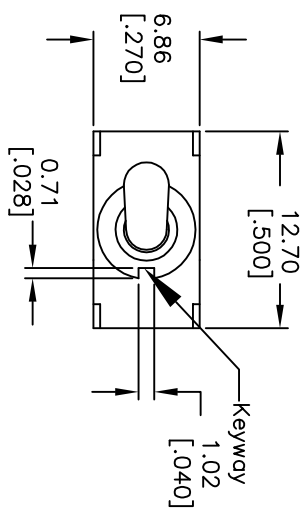


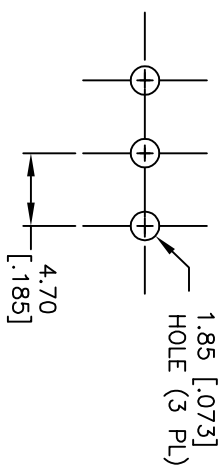

RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPDT

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
			
DN	NONE	DN	
2-3	OPEN	2-1	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
- ▲4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
5. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000M ohm min.
7. DIELECTRIC STRENGTH: 1000V RMS @sea level
8. OPERATING TEMP.: -30°C to 85°C
9. ▲DENOTES CRITICAL PARAMETER
10. 2002/95/EC (ROHS) COMPLIANT

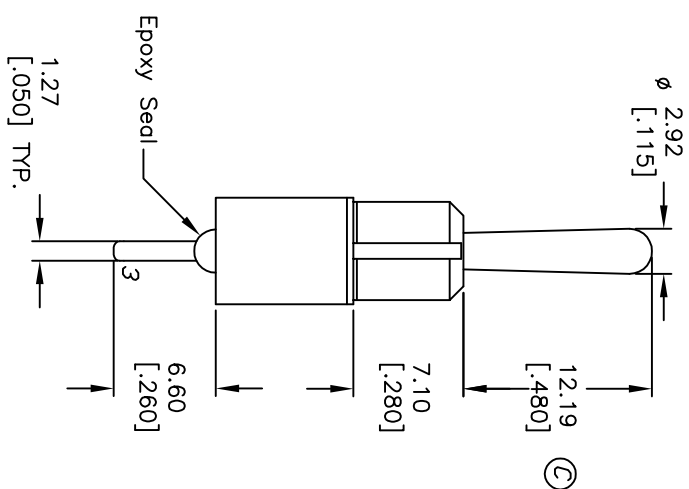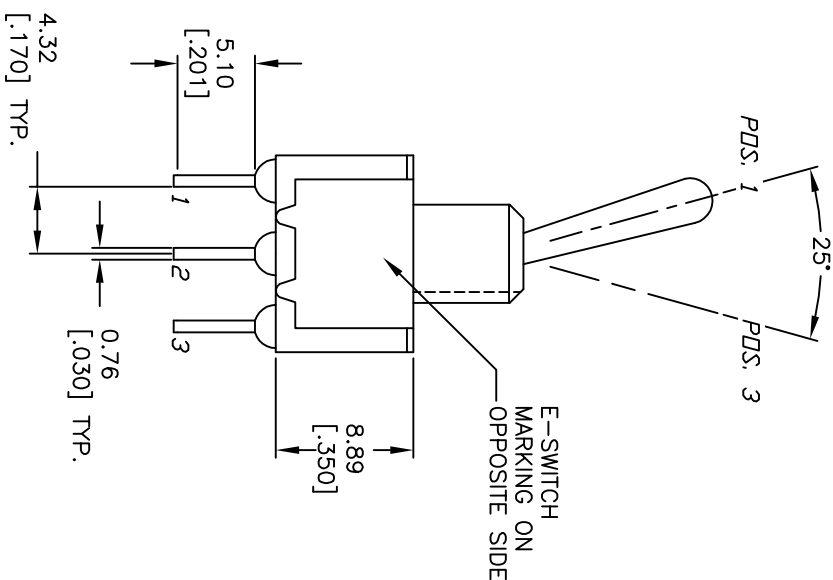

E	17781	CHANGED TERM DIM TO 5.1	10/15/07	BF
D	17712	CHANGED TERM LENGTH TO 6.60	9/24/07	BF
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSMERRED

				
TITLE				
100SP1T1B4M2QE				
SCALE	DATE	DR	DWG	REV
2:1	9/24/07	BF	T111597	E