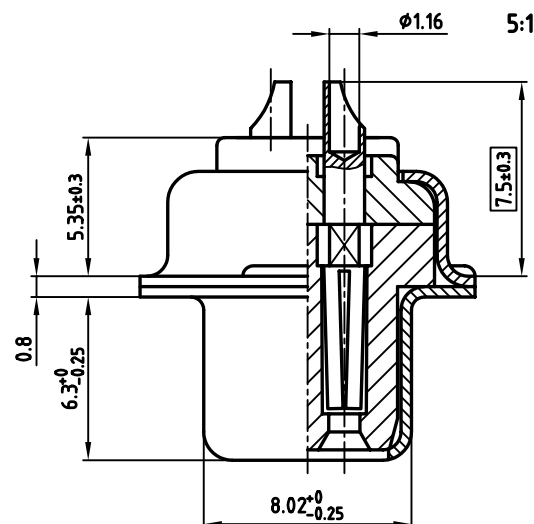
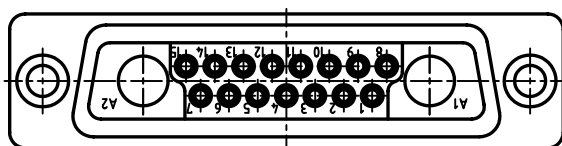
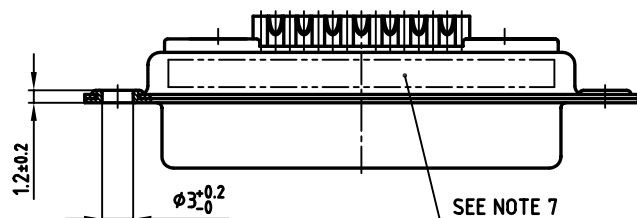
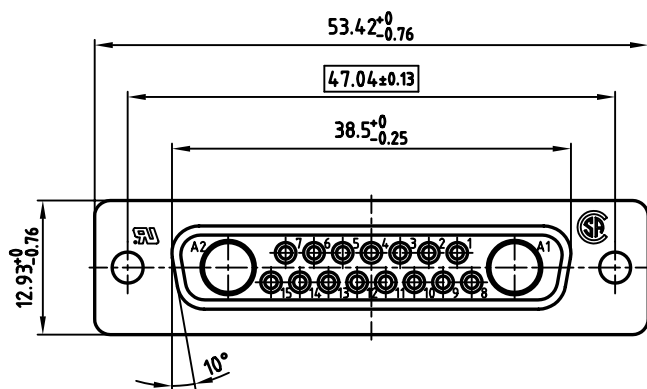


NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
4. PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
5. SOLDER CUP ACCEPTS CABLE AWG 20
6. NO CONTACTS ON POS A1 + A2
7. CONNECTOR IS PART MARKED: **PART NO: CONEC Y/WW**
8. = CRITICAL DIMENSION: SPC

PART-NO.	CFM PART-NO.
3017W2SCM99A10X	CFMP17W2S-K121

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	scale:
2002	2:1 (5:1)
drawn 02.08. Schmidt	material: SEE NOTES
appd. 02.08. E. Mickenbecker	title: D-SUB COMBINATION FEMALE
norm	17W2S SOLDER CUP
d-old	dwg no: AutoCAD 2000
	13K1A664
	part no: SEE TABLE

scale:	material:
2:1 (5:1)	SEE NOTES
title:	D-SUB COMBINATION FEMALE
17W2S SOLDER CUP	dwg no: AutoCAD 2000
	13K1A664
	part no: SEE TABLE

Directive 2002/95/EC
"RoHS"
Compliant