


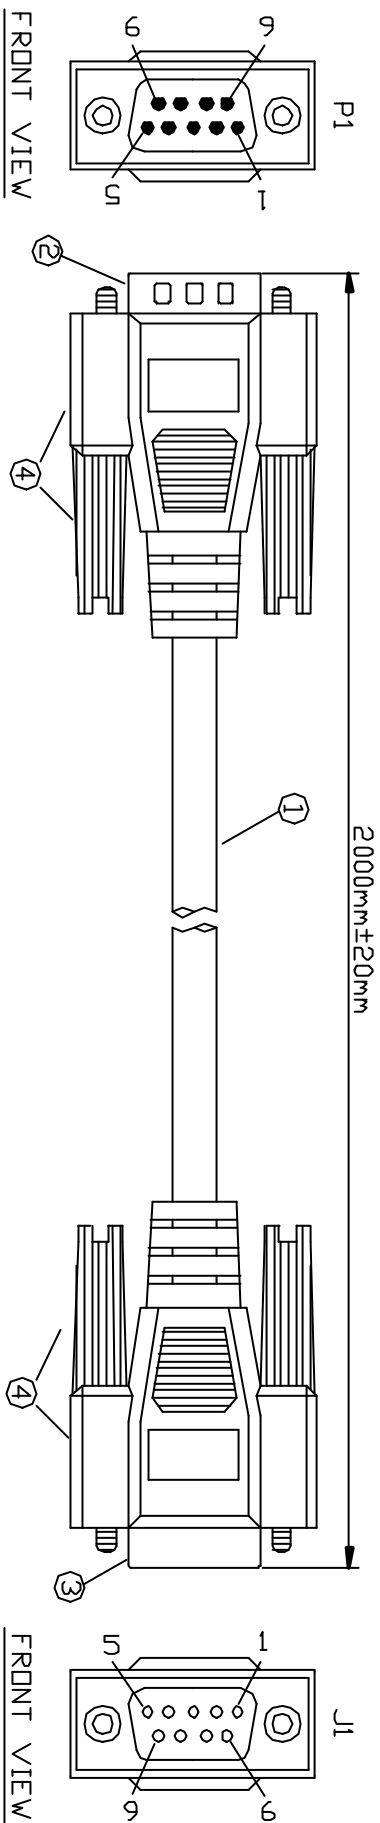

- 1.CABLE:ND UL,28AWG(7/0.127),TINNED AND STRANDED COPPER WIRE
INSULATOR:PVC,ID:0.85mm ,CABLING:9C+DRAIN WIRE
SHIELD:AL/AL MY COVERAGE
JACKET:PVC,COMPLIANCE ROHS,COLOR:BEIGE,D.D:5mm
2.1PCS CONNECTOR:ID-SUB 9 WAYS MALE SOLDER TYPE CONNECTOR
INSULATOR:P.B.T.+GLASS FIBER,COLOR:BLUE
CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATED
SHELL:NICKEL PLATED.
CONNECTOR COMPLIANCE ROHS
3.1PCS CONNECTOR:ID-SUB 9 WAYS FEMALE SOLDER TYPE CONNECTOR
INSULATOR:P.B.T.+GLASS FIBER,COLOR:BLUE
CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATED
SHELL:NICKEL PLATED.
CONNECTOR COMPLIANCE ROHS
4.HOOD:PVC MOLDED TYPE WITH FOIL SHIELDED ON INNER
ON INNER MOLD AND INJECTION OUTER MOLD WITH
THUMB SCREW:#4-40 UNC
COLOR:BEIGE,COMPLIANCE ROHS
5.FULL ROHS Guideline
6.ELECTRONIC TEST:100% OPEN SHORT+MISS WIRE TEST

PIN OUT

DB9 PIN MALE(P1)	WIRE	DB9 PIN FEMALE(J1)
1		1
2		2
3		3
4		4
5		5
6		6
7		7
8		8
9		9
SHELL	DRAIN WIRE	SHELL

PART NO	CAB-09GW/2	SHEET NO	1	THIRD ANGLE PROJECTION
TITLE: DB9 PIN MALE TO DB9 PIN FEMALE				
BEIGE COLOR,L2M				
DRAWN NO	D-CAB-09GW/2	SCALE	1:1	THIRD ANGLE PROJECTION
		SIZE	A4	CHECKED BY & DATE
		UNIT	mm	APPROVED BY & DATE
		mm	INCH	

