





Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP	  10A 125VAV, 6A 250VAC CQC	Mounting Hole 	Circuit Diagram 220VAC OFF  ON 		
	10(4)A 250V~ 10E3					
	10A 125VAC 1/3HP 10A 250VAC 1/2HP					
Contact Resistance	50m ohm Max.					
Insulation Resistance	DC 500V 100M ohm Min.					
Dielectric Strength	AC 1500V 1 minute					
Operation Temperature	-25°C~85°C					
Switch Function	3P SPST ON-OFF(Illuminated)					

***MATERIAL:**


Frame: Black, Nylon 66 (94-V2)

Actuator: Black, Nylon 66 (94-V2)

Lens: Red, PC (94-V2)

Terminals: Silver plated, Copper alloy

Printed: None

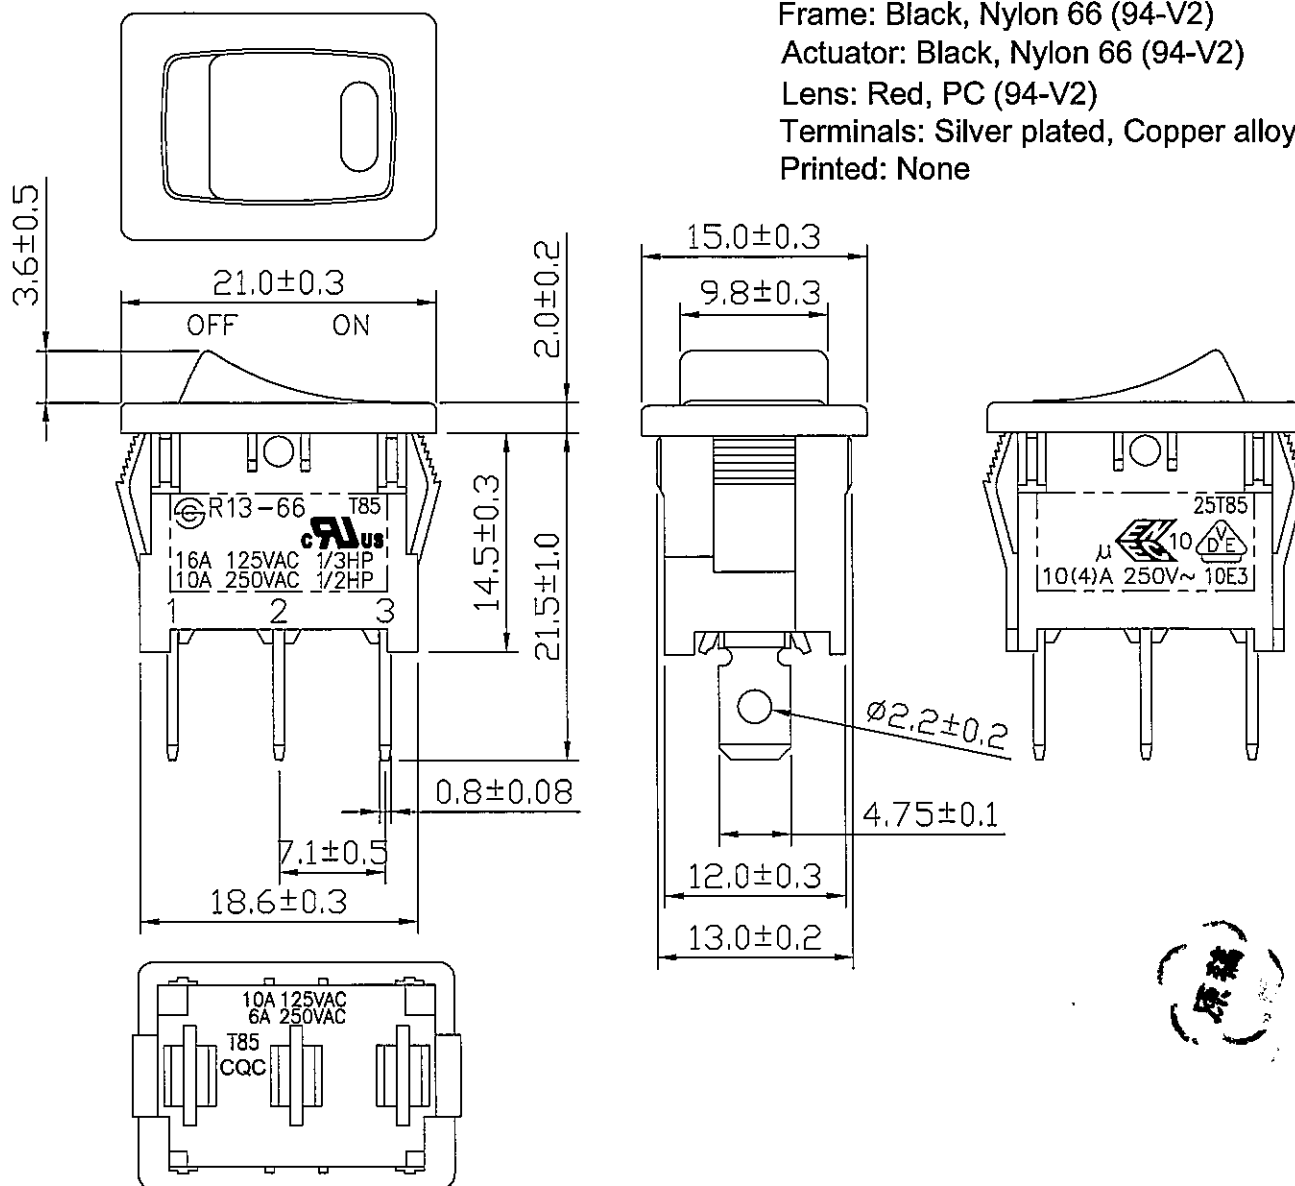

C8\R13\R13-66B4-02(1824988)

Date	Name			Description				No.	
Drawn	Checked	Approved	SCI BOM No.	1824988	Model Name	ROCKER SWITCH			
曹盈芳			Customer No.		Model No.	R13-66B4-02		Rev.	
10/22/10			Unit	mm	Shin Chin Industrial Co., Ltd.			0	