
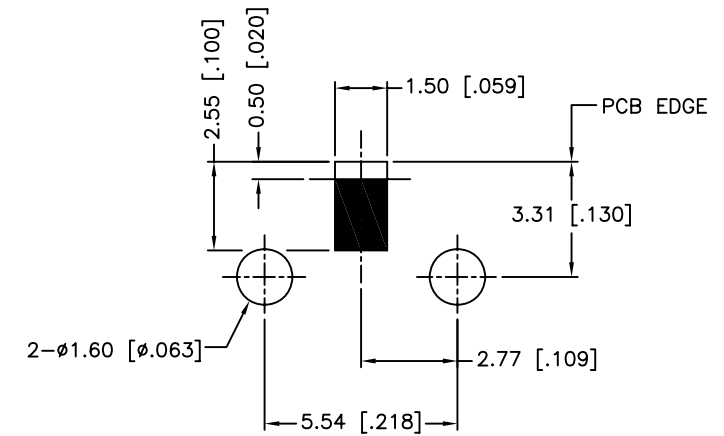
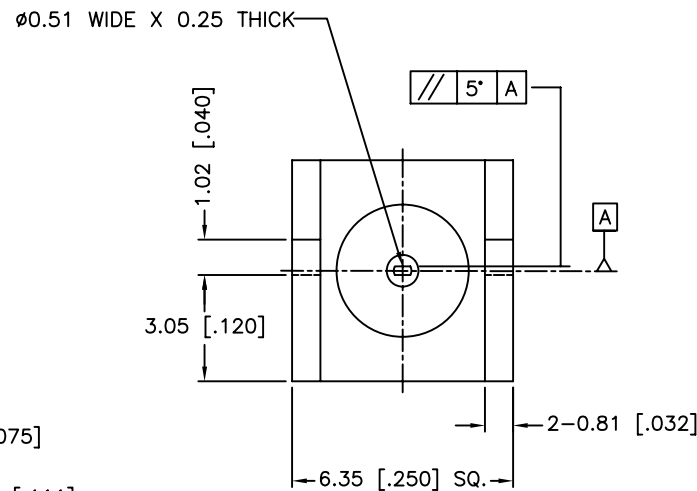


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/26/10	XXXXXX	INITIAL RELEASE
A	05/11/11	2174	ADD THE RECOMMENDED PCB LAYOUT

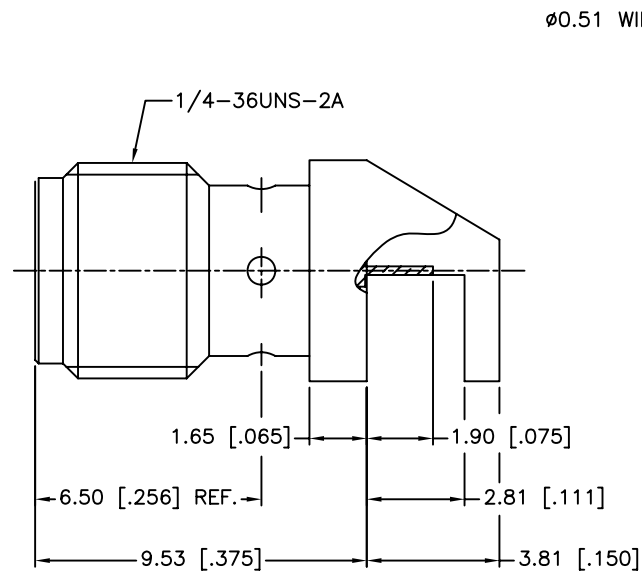

RECOMMENDED PCB LAYOUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex								
					DRAWN M.ZHANG		05/11/11										
					CHECKED												
					ISSUED												
					SHEET 1 OF 1												
3		CONTACT PIN		BERYLLIUM COPPER		GOLD		1		PART DESCRIPTION SMA END LAUNCH RECEPT.							
2		INSULATOR		PTFE		NATURAL		1									
1		BODY		BRASS		GOLD		1									
		DESCRIPTION		MATERIAL		FINISH		QTY		PART NO. 132417							
										DWG. NO. 132417.DWG		REV. A		SIZE A		SCALE NA	
										C:/CONNEX/132417.DWG							