
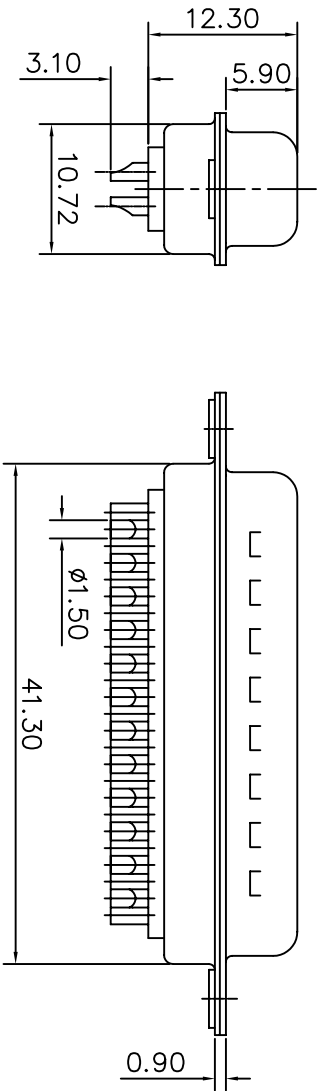


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be distributed, reproduced or used, in whole or in part, without the prior written consent of Amphenol Corporation. Amphenol Corporation will not be held responsible for any errors or omissions in this document or to use any information in this document.

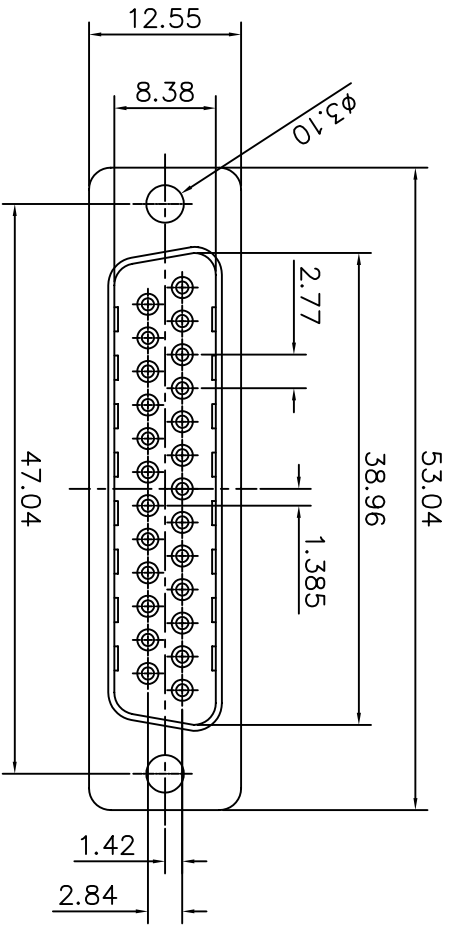


REVISIONS			
SYM	ECN	DESCRIPTION	DATE
A			05/03/07

D-SUB TECHNICAL DATA

SHELL :Steel 2.5um (100u") min tin over 1.25um (50u") min nickel
BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0 Color Black
CONTACTS : brass.
gold flash over 1.25um (50u") min nickel
ELECTRICAL : Voltage rating : 1000 V RMS at 50 Hz
Current rating 5A.
Insulation resistance >1000 M Ohms
Contact resistance 20 mOhms max.
CLIMATIC : Temperature range -55 °C up to 125°C
MARKING : Amphenol...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 717SD B 25 P

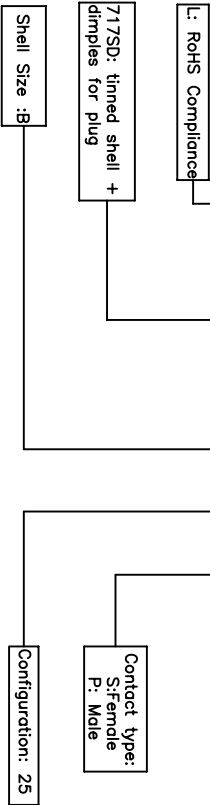

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
TOLERANCES		DRAWN		05/03/07	
U.S.		METRIC		05/03/07	
XX +/-		0.50		05/03/07	
XXX +/-		0.20		05/03/07	
ANGLES +/-		2°		05/03/07	
FOR MATERIALS AND FINISHES		DRAWING FILE :		TITLE	
SEE REMOTE SHARP EDGES				Stamped and Formed connector, SD series	
DIMENSIONS		ANGLE OF PROJECTION		SIZE DRAWING NO.	
0.5°				A4 C L717SDBSP	
1MM				REV. A	
SCALE		NONE		SHEET 1 OF 1	