

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1


DIN EN 61 984


Inserts

- 01.Number of contacts :3+PE
- 02.Rated Current :10A
- 03.Rated Voltage conductor-ground :230V
- 04.Rated Voltage conductor-conductor :400V
- 05.Pollution degree :3
- 06.Rated impulse voltage :4kv₁₀
07. Insulation resistance : $\geq 10\Omega$
- 08.Material:Polycarbonate
- 09.Rated voltage acc.to UL/CSA:600V
- 10.Limiting temperatures :-40℃~+125℃
- 11.Flammability acc.to UL94:V0
- 12.Mechanical working life
(mating cycles) : ≥ 500

Contacts

- 01.Material:Copper alloy
- 02.Surface:hard-silver plated
- 03.Contact resistance : $\leq 1m\Omega$
- 04.Terminal :Screw terminal
- 05.Wire gauge :1.0-2.5mm² (AWG 18-14)
- 06.Tightening torque :0.25Nm
- 07.Stripping length :7mm
- 08.Rohs Compliance

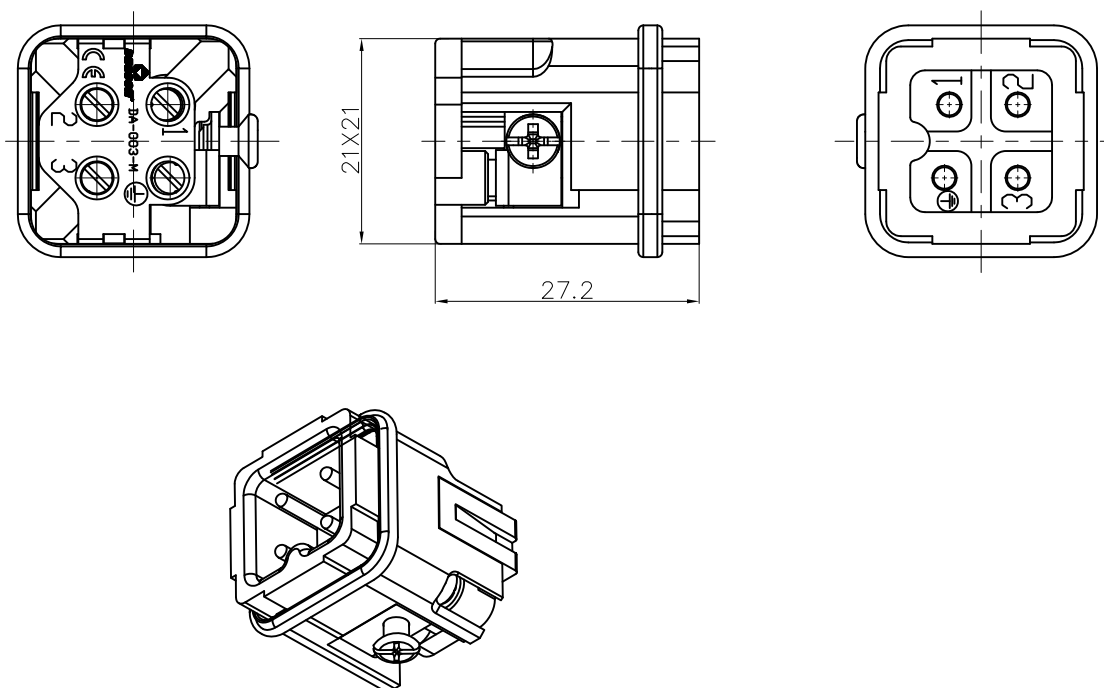

DETACHED LISTS	PART NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: DA-003-M		
	CHKD:			
	DRFT: Mr.Yang 2016.07.25	TITLE: CUSTOMER DRAWING	REV	DO
	 THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET	1/1

MM (INCH)	DO NOT SCALE DRAWING	SCALE	
--------------	----------------------	-------	--