
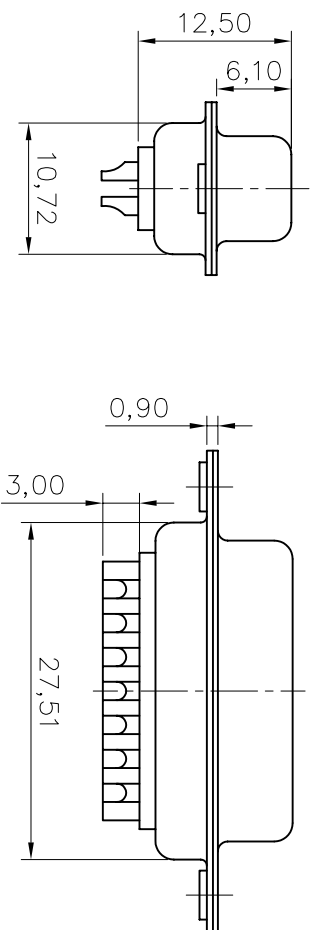


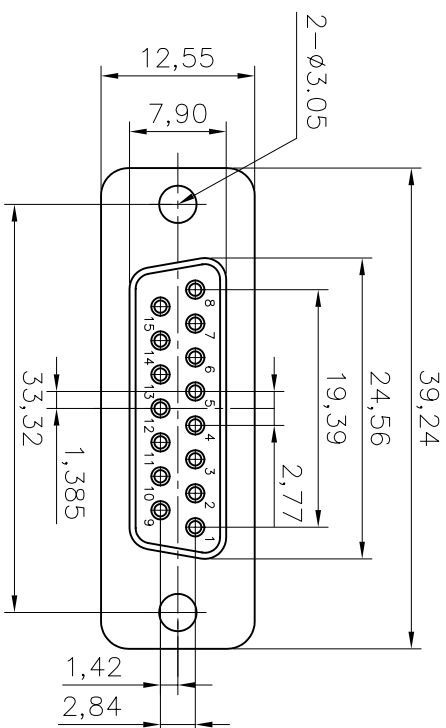


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A			09/21/07	

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um(100u") min sn over 1.25um(50u") min nickel
BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0 Color Black
CONTACTS : Phosphor bronze
gold flash over 1.25um(50u") min nickel on mating area.
2.5um(100u") min sn over 1.25um(50u") min nickel on solder area
ELECTRICAL : Voltage rating : 250 V RMS at 50 Hz
Current rating : 1A
Withstanding Voltage >1000 V RMS at 60 Hz for one minute
Insulation resistance >5000 M Ohms
Contact resistance 20 mOhms max.
CLIMATIC : Temperature range -55 °C up to 125°C
MARKING : Amphenol—...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 77SD A 15 S

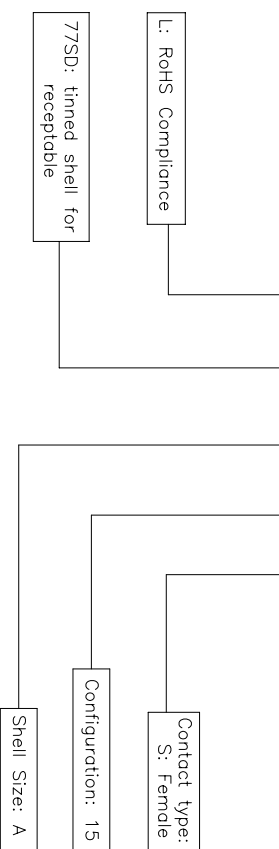[illegible]