

Molded Parts Specification Control Drawing

Part Number : 222K121 thru 185-25/225
Description : Boot, 90°, With Lip

NOTES

- All dimensions are in inches [millimeters]
- Dimensions appearing in table are as follows:
a - As Supplied
b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.
- Molding parts are optional. When -00 modification number is specified molding parts will be located as shown.
- If eyelet clip (000W212) is required with part then add CS-1858 to description (i.e. 202K121-3-D-CS-1858).

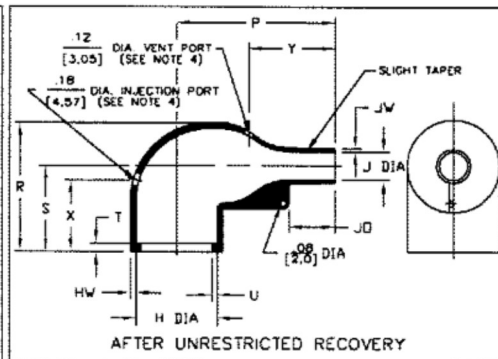
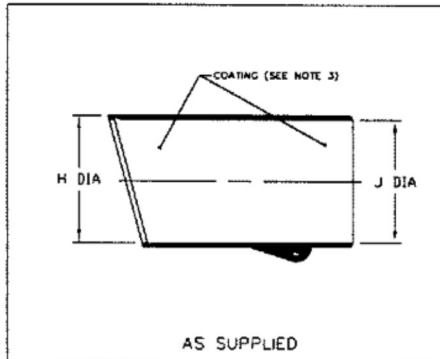


TABLE OF DIMENSIONS

PART NUMBER	H		J		P		R		S		T		U		JO		HW		JW		X		Y	
	Min	Max	Min	Max	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±10%	±20%	±20%	±20%	±20%	±20%	±20%	±20%	±20%
	a	b	a	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b
222K121-25/225	.95 [24.0]	.41 [10.4]	.95 [24.0]	.22 [5.6]	.98 [25.0]	.98 [25.0]	.75 [19.0]	.12 [3.0]	.04 [1.0]	.33 [8.5]	.05 [1.3]	.02 [0.5]	.71 [18.0]	.63 [16.0]										
222K132-25/225	1.18 [30.0]	.56 [14.2]	1.18 [30.0]	.23 [5.9]	1.26 [32.0]	1.06 [27.0]	.79 [20.0]	.12 [3.0]	.04 [1.0]	.33 [8.5]	.06 [1.5]	.03 [0.8]	.71 [18.0]	.79 [20.0]										
222K142-25/225	1.22 [31.0]	.71 [18.0]	1.22 [31.0]	.28 [7.1]	1.54 [39.0]	1.22 [31.0]	.83 [21.0]	.12 [3.0]	.04 [1.0]	.59 [15.0]	.07 [1.8]	.04 [1.0]	.71 [18.0]	.79 [20.0]										
222K152-25/225	1.42 [36.0]	.88 [22.4]	1.42 [36.0]	.33 [8.4]	1.81 [46.0]	1.50 [38.0]	1.02 [26.0]	.12 [3.0]	.04 [1.0]	.63 [16.0]	.07 [1.8]	.04 [1.0]	.98 [25.0]	.98 [25.0]										
222K163-25/225	1.69 [43.0]	1.11 [28.2]	1.69 [43.0]	.39 [9.9]	2.17 [55.0]	1.77 [45.0]	1.18 [30.0]	.12 [3.0]	.07 [1.7]	.69 [17.5]	.08 [2.0]	.04 [1.0]	.98 [25.0]	1.18 [30.0]										
222K174-25/225	2.36 [60.0]	1.38 [35.1]	2.36 [60.0]	.62 [15.7]	3.15 [80.0]	2.13 [54.0]	1.38 [35.0]	.12 [3.0]	.07 [1.7]	1.26 [32.0]	.13 [3.3]	.06 [1.5]	.98 [25.0]	1.77 [45.0]										
222K185-25/225	2.60 [66.0]	1.75 [44.5]	2.60 [66.0]	.66 [16.8]	4.25 [108.0]	2.68 [68.0]	1.65 [42.0]	.12 [3.0]	.08 [2.0]	1.89 [48.0]	.15 [3.8]	.08 [2.0]	1.38 [35.0]	2.76 [70.0]										

TE
TE Connectivity
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

Revision : D1
Date : 28MAR11

Part Number : 222K121 thru 185-25/225
Description : Boot, 90°, With Lip

Molded Parts Specification Control Drawing

Part Number : 222K121 thru 185-25/225
Description : Boot, 90°, With Lip

COMPATABILITY CHART

MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-25	Elastomer, Fluid Resistant	RT-1325	/225	S-1206	Adhesive

ORDERING INFORMATION

Base part number 222K1XX -25 -XX /225

Material dash number _____
(See Compatibility Chart)

Modification number _____
(if necessary, see front of scd binder for a complete list)

Adhesive slash number _____
(if necessary, see Compatibility Chart)

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

TE
TE Connectivity
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

Revision : D1
Date : 28MAR11

Part Number : 222K121 thru 185-25/225
Description : Boot, 90°, With Lip

CAD FILE MP03030