

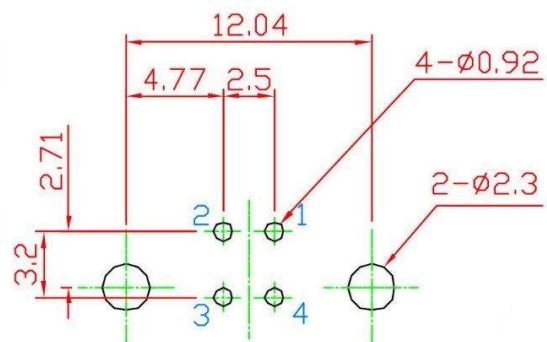
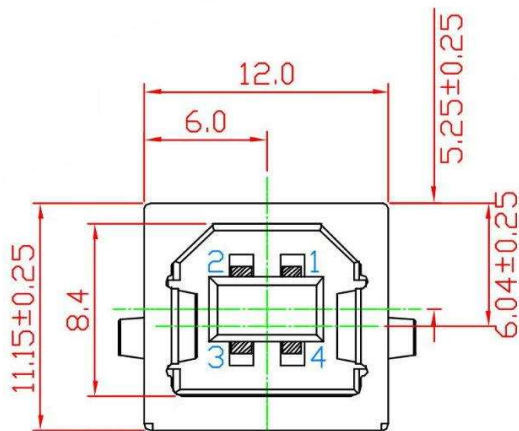




(COMPONENT SIDE)
PCB LAYOUT

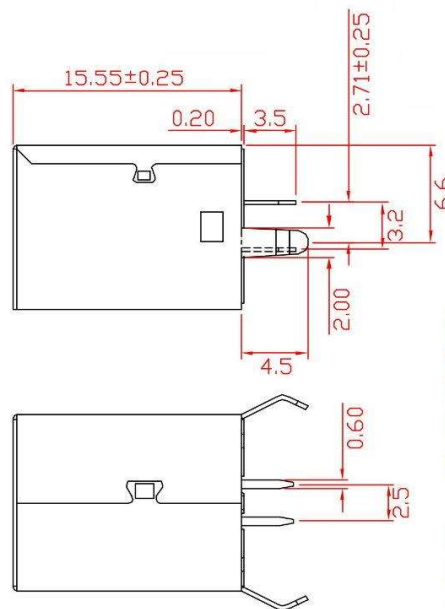

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

500V AC (rms) for 1 Minute(Rev. 2.0)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	PBT G.F.	WHITE		1
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	Gold:30u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)	4
3	SHELL	BRASS T:0.3	NICKEL PLATED	NI:80~120u"	1
4	BOTTOM COVER	PBT G.F.	WHITE		1

RoHS
Compliant

APPD.
核准
DWG.
製圖
DATE 制表日
2011/11/21

SCALE
比例
UNIT
單位
PAGE
張數
1 OF 1

TOLERANCE
容許公差
0 ± 0.25
.00 ± 0.13
ANG. ±
SIZE
紙張尺寸
A4
REV.
版本
A
PART NAME 品名
USB B TYPE DIP TYPE 4P FEMALE 180°
NICKEL SHELL SELECTIVE GOLD
PLATING WHITE COLOR ROHS
PART NO.
料號
USBB-BV