# HANDLING INSTRUCTION
## opticalCON | FOPS-SINGLE Pulling Sock

### PREPARATION

Ⓐ

Ⓐ Open metal zipper and attach the strain relief on the cable as illustrated on pic A.

**Attention:** Make sure that the strain relief is between the two velcro straps.

Ⓑ

Ⓑ Due to the strain relief is the center element for the pulling force, it's important to tighten the cable tie.

Ⓒ

Ⓒ With tighten the velcro straps, fix the attached strain relief and cable on the opticalCON pulling sock.

Ⓓ

Ⓓ Close metal zipper and tighten velcro strap to enhance cable retention of the entire pulling sock.

### FINISH

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА

## STORAGE

Ⓐ

Ⓐ Reel cable with attached pulling sock flat on the used cable drum.

Ⓑ

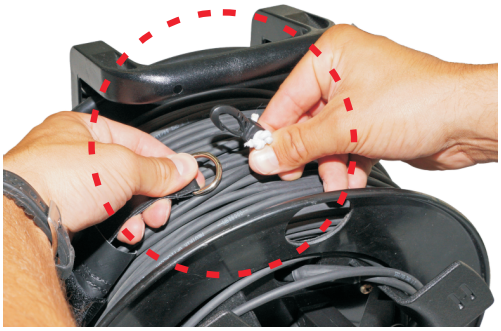

Ⓑ Secure opticalCON pulling sock with the black hook on the metal grommet.

**NOTE:** The proper length of the elastic cord can be individual adjusted according the oute diameter of the used drum.

## FINISH

| | | | |
|---|---|---|---|
| NEUTRIK AG | LI | T: +423 / 237 24 24 | F: +423 / 232 53 93 |
| NEUTRIK USA Inc. | USA | T: +1 704 / 972 3050 | F: +1 704 / 438 9202 |
| NEUTRIK (UK) Ltd. | UK | T: +44 1983 / 811 441 | F: +44 1983 / 811 439 |
| NEUTRIK Vertriebs GmbH | DE / NL / AT/DK | T: +49 8131 / 280 890 | F: +49 8131 / 280 830 |
| NEUTRIK France | FR | T: +33 1 / 4131 6750 | F: +33 1 / 4131 0511 |
| NEUTRIK Tokyo Ltd. | JP | T: +81 3 / 3663 4733 | F: +81 3 / 3663 4796 |
| NEUTRIK Hong Kong Ltd. | HK | T: +852 / 2687 6055 | F: +852 / 2687 6052 |


Draft. Nr.: BDA 336 / 3102M2091 | Update: 22.10.2012 | Data subject to change without prior notice. ©2012 NEUTRIK® . ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.