
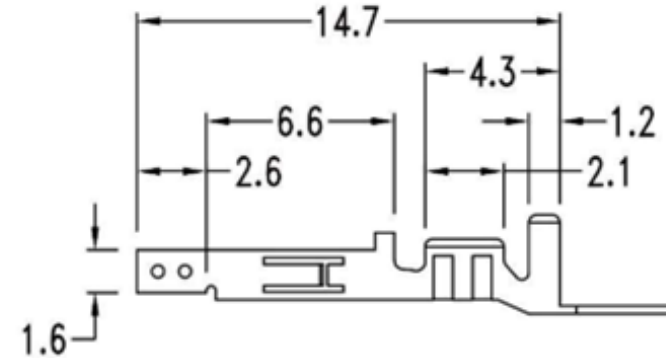
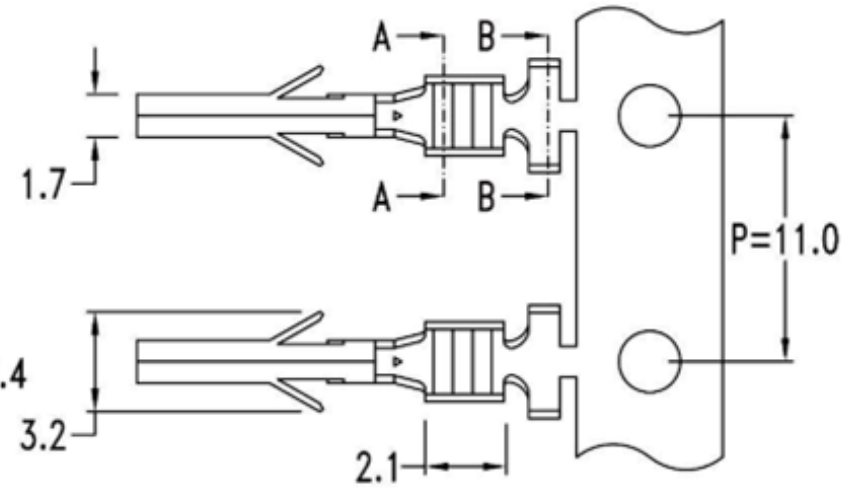



Features:

- 600V volts rating (R.M.S.)
- Thickness: 0.2mm

Specifications:

- Voltage rating: 600V AC, DC
- Current rating up to 9A(with #18 AWG)
- Dielectric withstanding Voltage: 1500V AC/minute
- Contact resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.
- Crimp resistance: 5mΩ max,
- Terminal retention force: 3.0Kg min.
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)



Ordering & Dimensional Information (mm)

Part No.	Dimension				Wire Size (AWG)	Material	Finished
	a	b	c	d			
N42W-T2	2.3	2.3	1.65	1.8	#22 ~ #28	Brass	Tin-plated
N42W-T1	4.5	3.6	2.3	1.9	#18 ~ #24		
N42W-T			2.7	2.3	#16		

RoHS
Compliant

APPRO.
核准
HELEN
DWG.
製圖
ABBY
DATE
制表日
2024/12/10

SCALE
比例
參 考
UNIT
單位
MM
PAGE
張數
1 OF 1

TOLERANCE
容許公差
.000 ± 0.08
.00 ± 0.25
.0 ± 0.40
SIZE
線規尺寸
A 4
REV.
版次
B

Ninigi

PART NAME 品 名
4.2mm FEMALE TERMINAL
BRASS MATERIAL TIN PLATING ROHS

PART NO.
料 號
N42W