

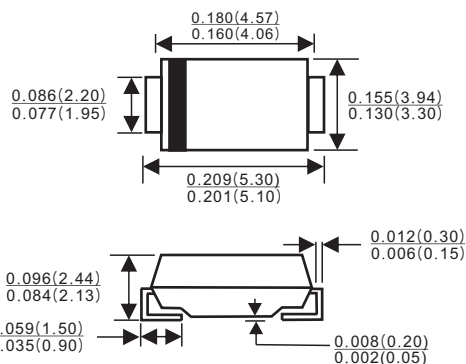

VOLTAGE RANGE: 400 --- 600 V
CURRENT: 1.0 A
SMB/DO-214AA

Features

- ✧ Low cost
- ✧ Low leakage
- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ Easily cleaned with Alcohol, Isopropanol and similar solvents
- ✧ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ✧ Case: JEDEC DO-214AA, molded plastic
- ✧ Polarity: Color band denotes cathode
- ✧ Weight: 0.003 ounces, 0.093 grams
- ✧ Mounting position: Any



Dimensions in inches and(millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

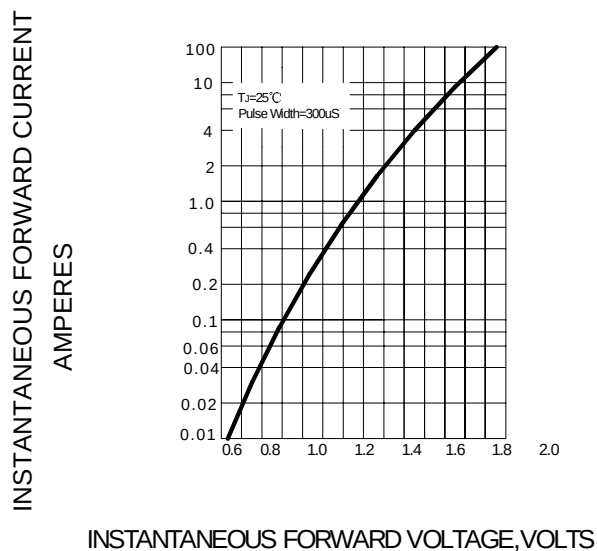
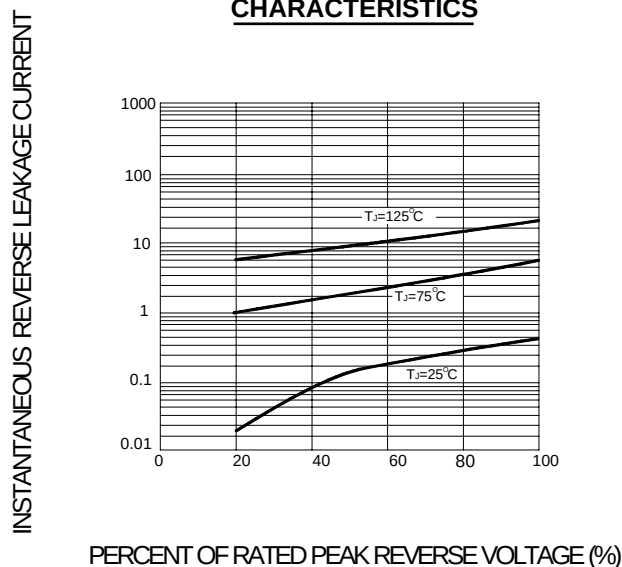
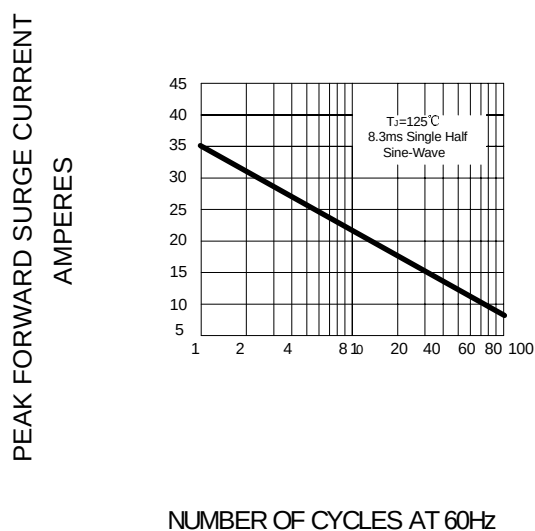
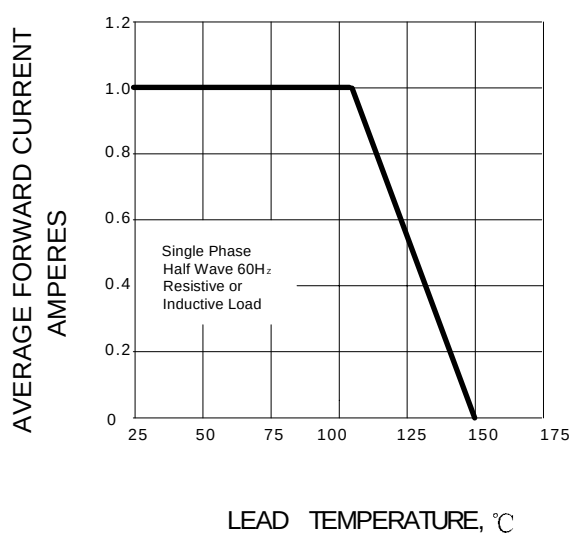
		MURS140B	MURS160B	UNITS
Device marking code		MG	MJ	
Maximum recurrent peak reverse voltage	V_{RRM}	400	600	V
Maximum RMS voltage	V_{RMS}	280	420	V
Maximum DC blocking voltage	V_{DC}	400	600	V
Maximum average forward rectified current @ $T_L=110\text{ }^{\circ}\text{C}$	$I_{F(AV)}$	1.0		A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125\text{ }^{\circ}\text{C}$	I_{FSM}	35		A
Typical reverse recovery time (Note1)	t_{rr}	50		ns
Maximum reverse current @ $T_A=25\text{ }^{\circ}\text{C}$ at rated DC blocking voltage @ $T_A=125\text{ }^{\circ}\text{C}$	I_R	5.0 150		μA
Maximum instantaneous forward voltage at 1.0 A	V_F	1.25		V
Typical thermal resistance (Note2)	$R_{\theta JL}$	13		$^{\circ}\text{C/W}$
Operating junction temperature range	T_J	- 55 ---- + 150		$^{\circ}\text{C}$
Storage temperature range	T_{STG}	- 55 ---- + 150		$^{\circ}\text{C}$

 NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $t_{rr}=0.25\text{A}$.

2. Junction to ambient.



Ratings AND Characteristic Curves

FIG.1 – TYPICAL FORWARD CHARACTERISTIC

FIG.2 -- TYPICAL REVERSE LEAKAGE CHARACTERISTICS

FIG.3 – PEAK FORWARD SURGE CURRENT

FIG.4 – FORWARD DERATING CURVE


PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SMB	3000/REEL	48000	36X35.8X36.5	12.00	11.00