

THIS DRAWING IS THE PROPERTY OF SAIA-BURGESS ELECTRONICS AND MUST NOT BE USED OR COPIED, ENTIRELY OR IN PART, WITHOUT THE PERMISSION OF SAIA-BURGESS ELECTRONICS.

Drq No :- **C 19611**

SPECIFICATION

ACTUATING FORCE = 0.6N [2.2ozf] MAX

RELEASE FORCE = 0.07N [0.25ozf] MIN

FREE POSITION = 10.80 [0.43] MAX

OPERATING POSITION = 8.2 ± 1.0 [0.32]


MOVEMENT DIFFERENTIAL = 0.7 [0.028] MAX

OVER TRAVEL = DEPRESS TO CASE (AVAILABLE)


SPECIAL FEATURE :-
TESTED & STAMPED TO UL & CSA REQUIREMENTS.

APPROVAL RATING :-
5A - 250V.A.C.

DIAGRAM OF CONNECTIONS



INSTALLATION DRAWING

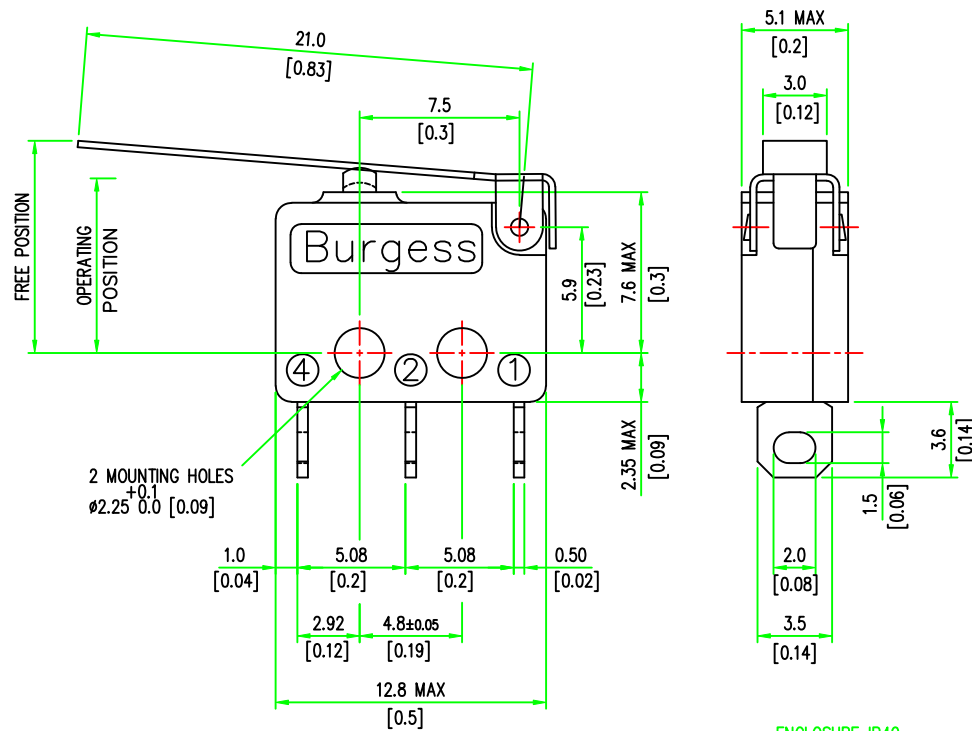

ISSUE	REVISION	DATE
1	FIRST ISSUE	10.12.81
2		13.5.85
3		16.12.85
4		4.3.87
5		9.6.87
6		7.7.89
7		29.7.82
8		5.8.98
9	REDRAWN ON NEW FORMAT	2.2.00

SAIA-Burgess Electronics

SWITCHES • MOTORS • CONTROLLERS

SAIA-Burgess Electronics Limited
Dukesway, Team Valley Trading Estate
Gateshead, Tyne & Wear NE11 0UB
Tel: (0191)4016100, Fax: (0191)4016322



DO NOT SCALE !
This drawing must only be
amended on CAD system

TOLERANCES UNLESS STATED:-
NO DECIMAL PLACE ± 0.50 1 DECIMAL PLACES ± 0.25
2 DECIMAL PLACES ± 0.15 ANGULAR $\pm 1^\circ$
INCH - OUNCE UNITS (IN BRACKETS)

ALL DIMENSIONS SPECIFIED IN MILLIMETRES

DRAWN	T.E.	Approved	
DATE	10.12.81	DRAWING OFFICE	
SCALE	5:1	ENGINEERING	
DATE ISSUED		QUALITY ASSURANCE	

TITLE / DESCRIPTION

F4T7Y1-UL

Drq No :- **C 19611**

A3