


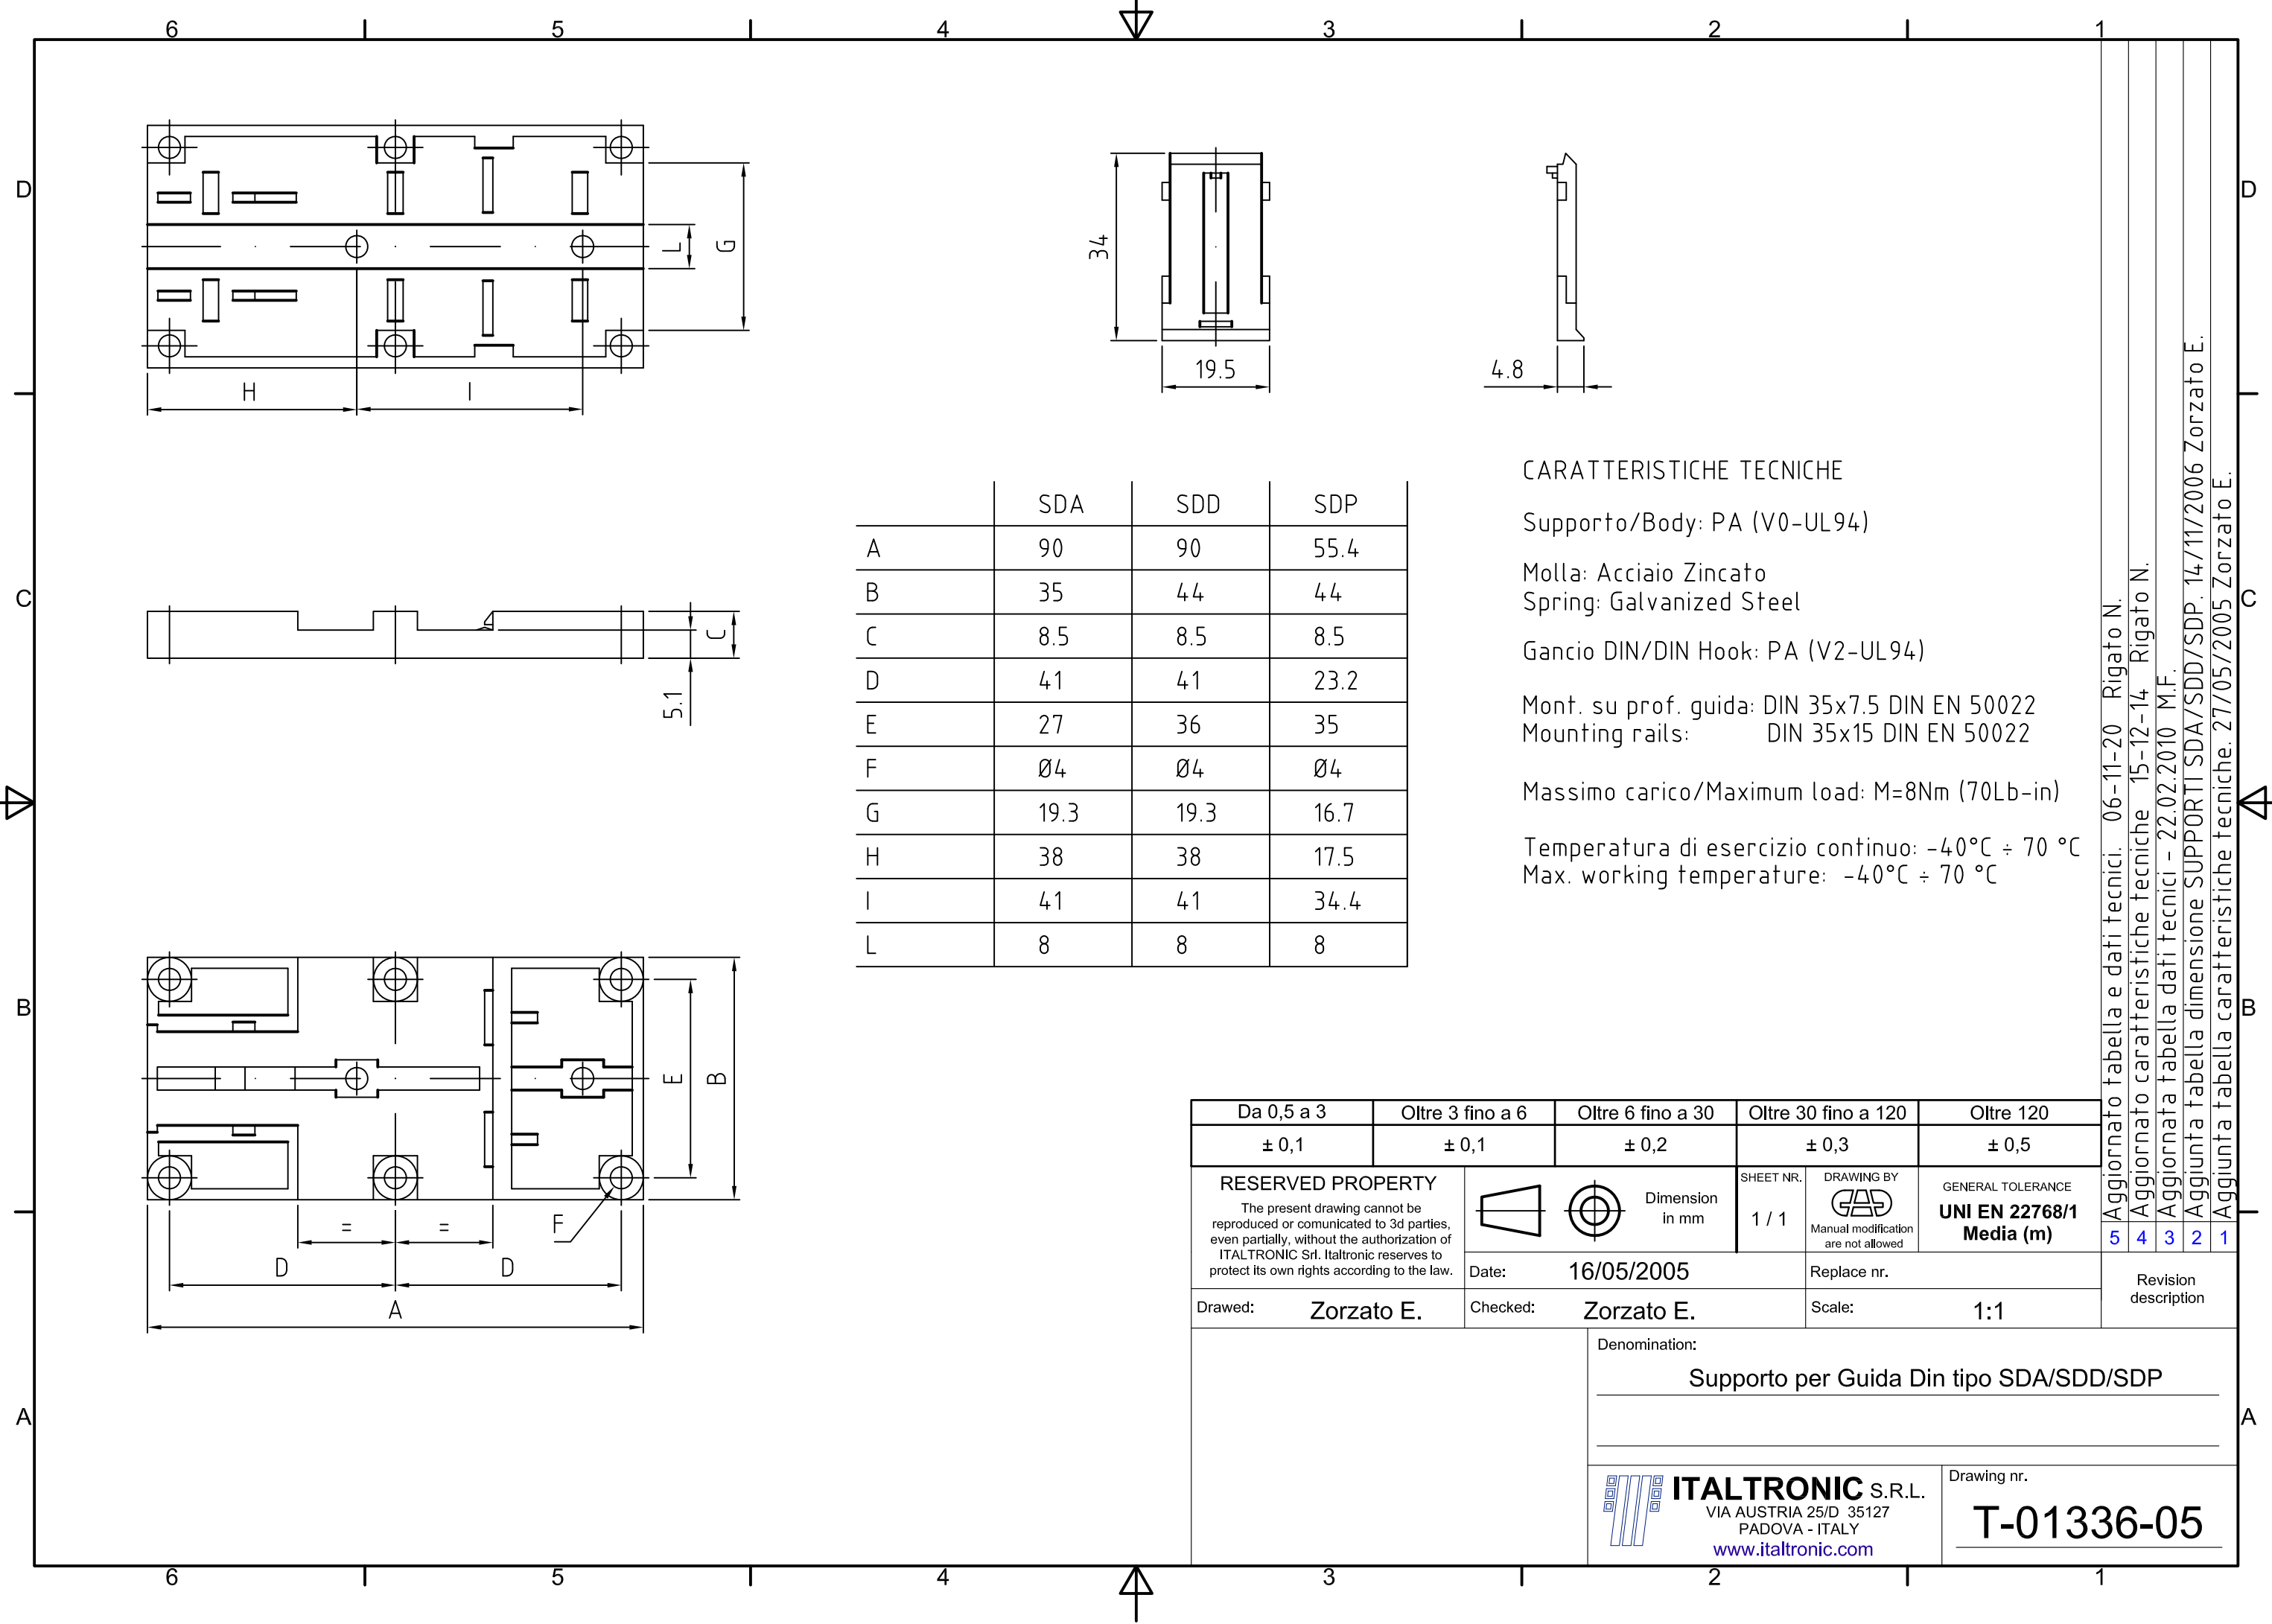

	SDA	SDD	SDP
A	90	90	55.4
B	35	44	44
C	8.5	8.5	8.5
D	41	41	23.2
E	27	36	35
F	Ø4	Ø4	Ø4
G	19.3	19.3	16.7
H	38	38	17.5
I	41	41	34.4
L	8	8	8

CARATTERISTICHE TECNICHE

Supporto/Body: PA (V0-UL94)
Molla: Acciaio Zincato
Spring: Galvanized Steel
Gancio DIN/DIN Hook: PA (V2-UL94)
Mont. su prof. guida: DIN 35x7.5 DIN EN 50022
Mounting rails: DIN 35x15 DIN EN 50022
Massimo carico/Maximum load: M=8Nm (70Lb-in)
Temperatura di esercizio continuo: -40°C ÷ 70 °C
Max. working temperature: -40°C ÷ 70 °C

Da 0,5 a 3		Oltre 3 fino a 6		Oltre 6 fino a 30		Oltre 30 fino a 120		Oltre 120		Aggiornato	Aggiornato	Aggiornato	Aggiunta	Aggiunta
± 0,1		± 0,1		± 0,2		± 0,3		± 0,5						
RESERVED PROPERTY The present drawing cannot be reproduced or communicated to 3d parties, even partially, without the authorization of ITALTRONIC Srl. Italtronic reserves to protect its own rights according to the law.				SHEET NR.		DRAWING BY		GENERAL TOLERANCE						
				1 / 1				UNI EN 22768/1						
						Manual modification are not allowed		Media (m)						
Date:		16/05/2005				Replace nr.				Revision description				
Drawed: Zorzato E.		Checked: Zorzato E.				Scale: 1:1								
				Denomination:										
				Supporto per Guida Din tipo SDA/SDD/SDP										
				ITALTRONIC S.R.L.						Drawing nr.				
				VIA AUSTRIA 25/D 35127 PADOVA - ITALY www.italtronic.com										
										T-01336-05				