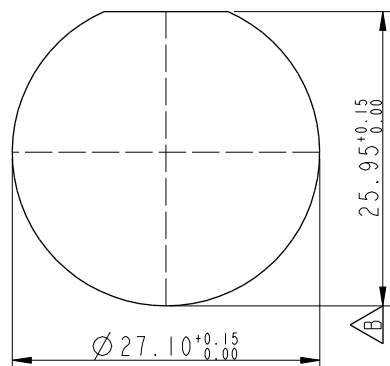
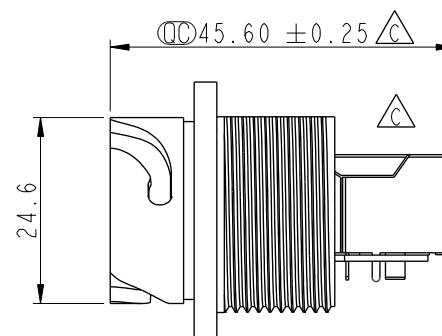

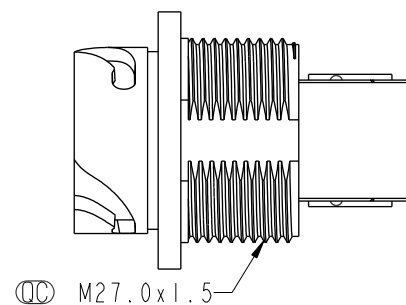
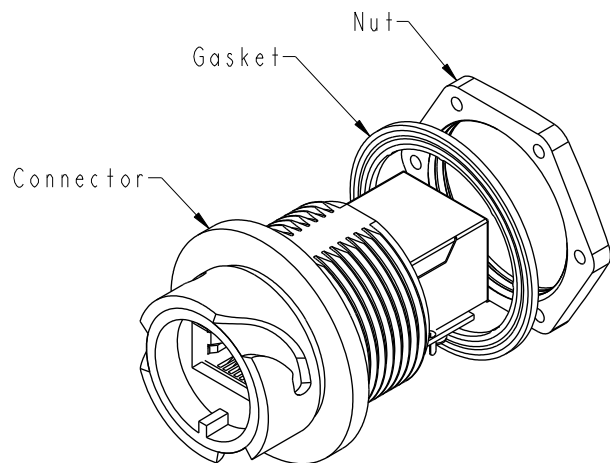


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN1610289	2016/01/13	Ruru	Change Note
E	C190405	2019/03/18	Ruru	Modify Note
F	C220801	2022/06/08	Vicky	$\triangle F$ X2

Recommended
Panel Cut-Out $\triangle F$ Note:

- * RoHS Compliant
- * (CC) Important dimension
- * Waterproof rate: IPX7, unmated
- * Connector Housing: Thermoplastic, Black, RJ45 jack, shielded
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black
- * For panel thickness max: 9.0mm
- * Gasket and nut are packed separately in pe bag

UNIT: mm			TITLE
TOLERANCE	.X ±0.25	.XX ±0.1	RJ, ODVA PLASTIC, C5E SHLD
.XXX ±0.05	ANGLES ±1°		REAR FASTENED, F, PNL JACK S, 3LOCK
SCALE	1:1	SIZE A4	SHEET 1 OF 1
REV.	F	WC-REV.	B.7
		(CC):	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	ROP-5SRFFH-TCU7001	DRAWN BY	Ruru	DATE	2019-03-18
DWG NO	ROP-5SRFFH-TCU7001	CHECKED BY	Rita	DATE	2019-03-18
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-18