HIRSCHMANN®
Test & Measurement
A BRAND OF SKS

SKS®
SKS Kontakttechnik GmbH

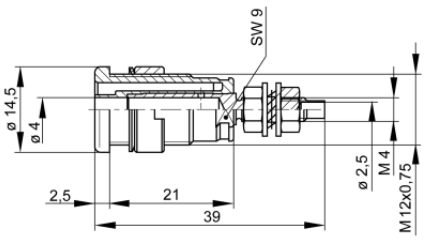
Sockets

4 mm safety system

SEB 2600 G M4



CE

Product	SEB 2600 G M4
description	Safety built-in socket, 4 mm diameter, touch-protected, M 4 thread and solder connection, gold-plated brass. For installation into switch panels and equipment chassis with wall thicknesses up to 6 mm. Installation hole: 12.2 mm diameter, Tightening torque: 50 Ncm Accessory: assembly tool MW SEB
operating instruction	BA451
article-no. / *colour	9723541xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 05 brown · 06 gray · 07 white · 09 violet · 88 yellow green Au
drawing	
	
technical data	
connection	M4 thread, solder connection
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	32 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010(1)	-40 °C to +80 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА

UL	cURus E537895

(1) contact the manufacturer for applications at deviating temperature ranges
stand: 22.08.2024

stand: 22.08.2024