
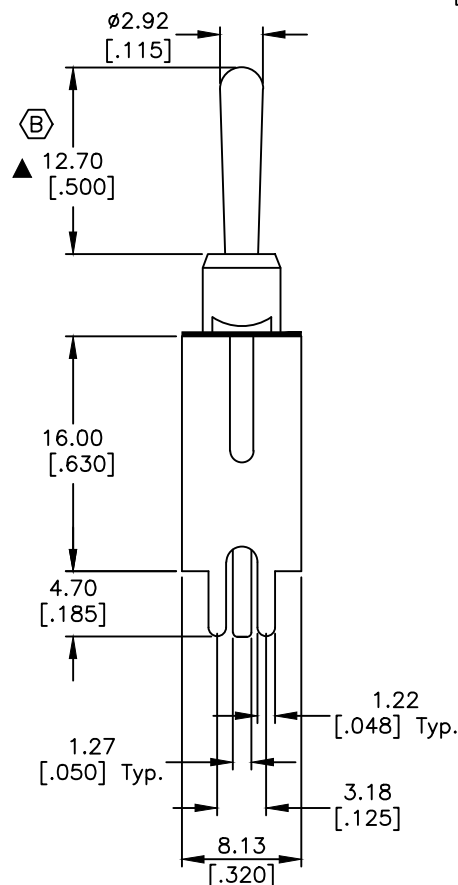


RECOMMEND P.C.B LAYOUT

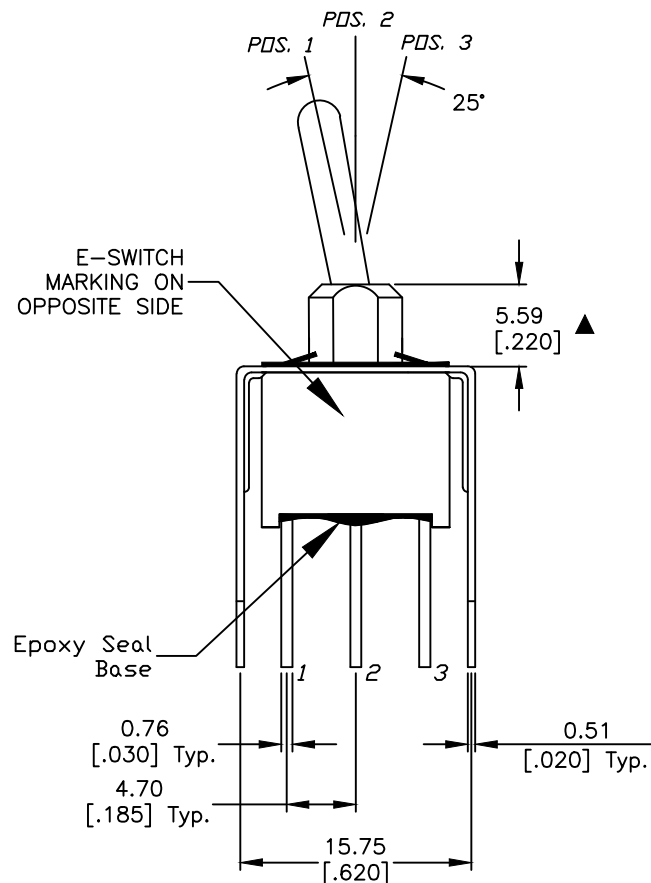

CIRCUIT: SPDT

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC; 2A @250VAC
5. ELECTRICAL LIFE: 40,000 make-and-break cycles
at full load.
6. INSULATION RESISTANCE: 1,000M ohm min.
7. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.

▲ SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3	OPEN	2-1

9. ▲ DENOTES CRITICAL PARAMETER.					 E-SWITCH®				
C	22298	change bushing ht. to 5.59mm	5/6/16	MW	TITLE 100AWSP1T1B4VS3QE				
B	13204	12.70 WAS 10.41, ADD CRITICAL	6/12/03	AR					
A	10305	RELEASED FOR PRODUCTION							
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED.					SCALE	DATE	DR	DWG	REV
					2:1	8/6/99	MM	T101027	C