
DEGSON ELECTRONICS CO., LTD.

Product Specification



Material		
Screws	:	M2.5 steel Zinc plated
Wire guard	:	Phosphor bronze，Ni plated
Contact	:	Brass，Tin plated
Housing	:	PBT，UL94V-0
Electrical		
Rated voltage	:	300V
Rated current	:	10A
Contact resistance	:	20mΩ
Insulation resistance	:	5000MΩ/DC1000V
Withstanding voltage	:	AC2000V/1Min
Wire range	:	28-16AWG 1.5mm²
Mechanical		
Temp.Range	:	-30°C~+120°C
Torque	:	0.4Nm(3.6lb.in)
Strip length	:	4.5mm

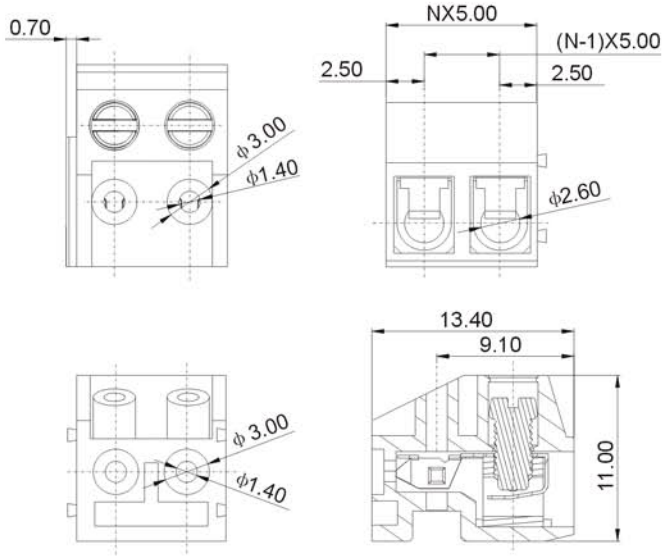

HOW TO ORDER:

DG332K-5.0 – □□ P – 1□ – X X X (Customer Request)

Series No. | No of Pole | Color

1	Gray	4	Green	7	Transparent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

MM (INCH)	DEGSON ELECTRONICS CO., LTD.
THIRDANGLE PROJECTION	NAME DG332K-5.0

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА