



Rating	25A 12VDC	Mounting Hole			Circuit Diagram
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Switch Function	3P SPST ON-OFF (LED dependent)				
Operation Force	450g±200g	Thickness	X	Y	
		0.75...2.0	28.5+0.1	11.6+0.1	
		2.0...3.0	28.7+0.1	11.6+0.1	
		3.0...4.0	29.0+0.1	11.6+0.1	


Material:

Frame: Black, Nylon#66

Actuator: Black, Nylon#66

LED: Red

Printed: None

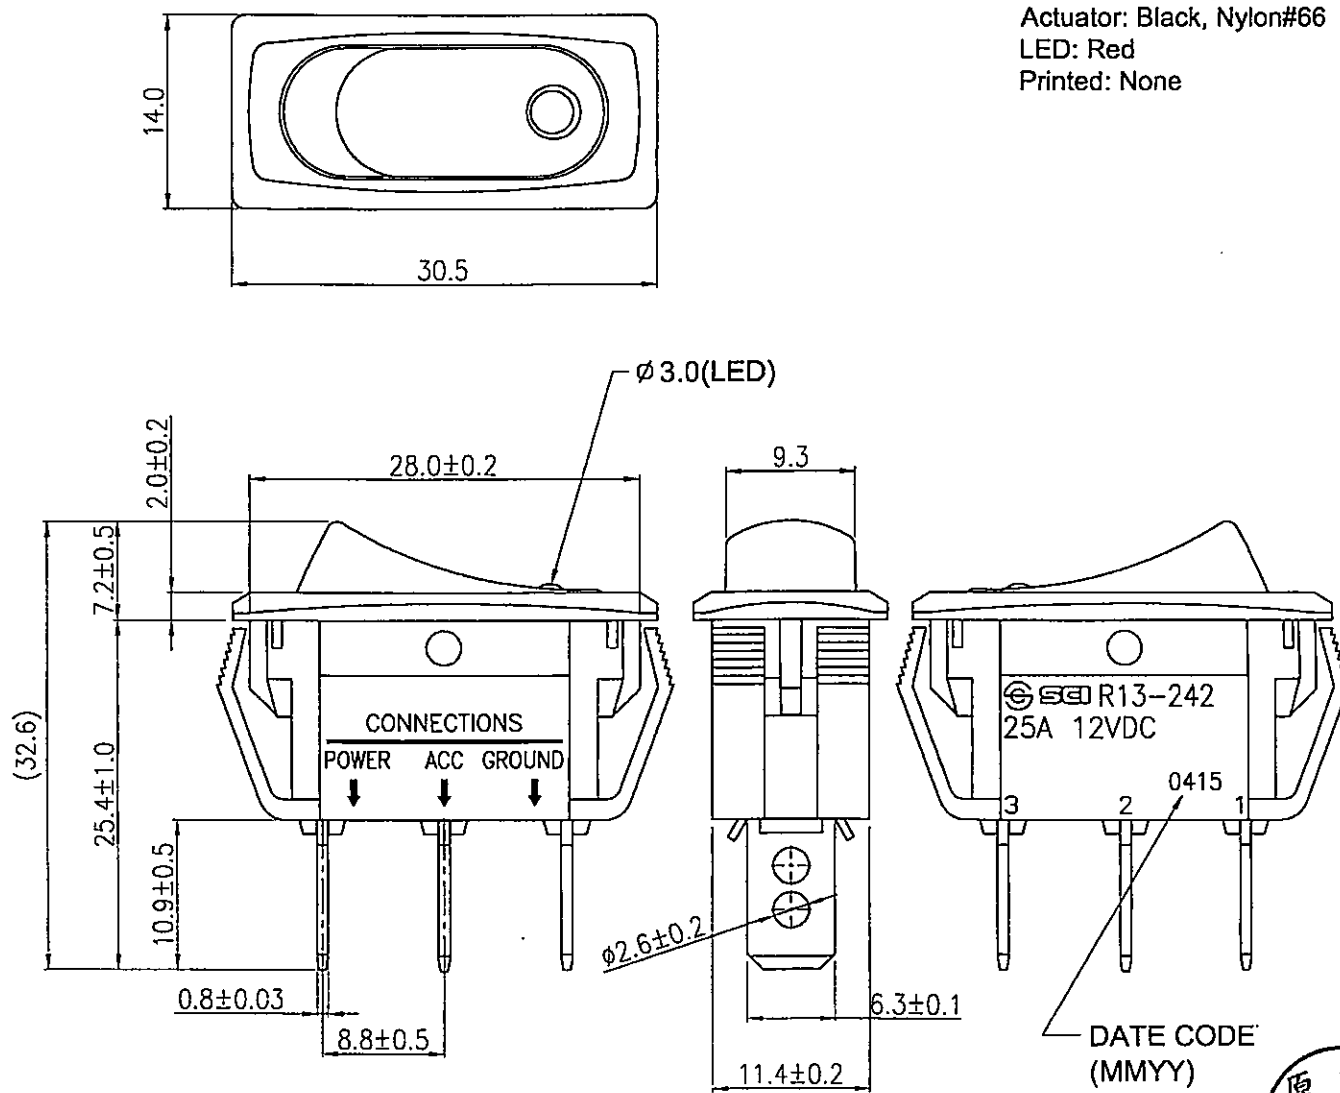

Tolerances ±0.3 Unless Otherwise Specified

4/21/15	周傑輝	依實物增加日期				△	
Date	Name	Description				No.	
Drawn	Checked	Approved	SCI BOM No	1822500	Model Name	ROCKER SWITCH	
周傑輝	許明達	Since	Customer No		Model No.	R13-242L-01	Rev.
4/21/15	4/23/15	4/24/15	Unit	mm	Shin Chin Industrial Co., Ltd.		1