

圖號 DRAWING No. :

品名 NAME: Ring

ITEM No. :

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可
1	產品尺寸更改	106/08/25	ANDY


MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16
MAX AMP	9	12	17	18

NOTE:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. SHRINK TEMP: 150°C
OPERATING TEMP: -10°C ~ 105°C
3. BRAZED SEAM
4. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05


WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	L ±2.00	E ±2.00	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²		3.7	8.0	27.0	18.5	1.7	0.75
	ST-081/R-T	4.3	8.0	27.0			
		5.3	8.0	27.0			
		6.5	11.6	31.5			
		8.4	11.6	31.5			
		10.5	13.6	40.5			

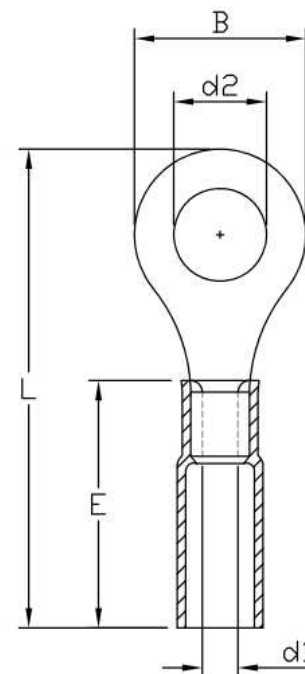

認可 APPROVALS

製圖 DRAFT: TINA
設計 DESIGN: KEN
核可 CHECKED: ANDY

第三視角
THIRD VIEW



MATERIAL

INSULATION: HEAT-SHRINK TUBE
MATERIAL: COPPER
TIN PLATING

單位 UNIT

m/m

比例 SCALE

日期 DATE: 2015.01.05