




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1130164-167	2011/02/25	Jiang Jun Hua	REF. TO ECR/N.NOTE.
C	LEN13B0193-96	2013/09/11	Cary	Change Logo From LTW To Amphenol

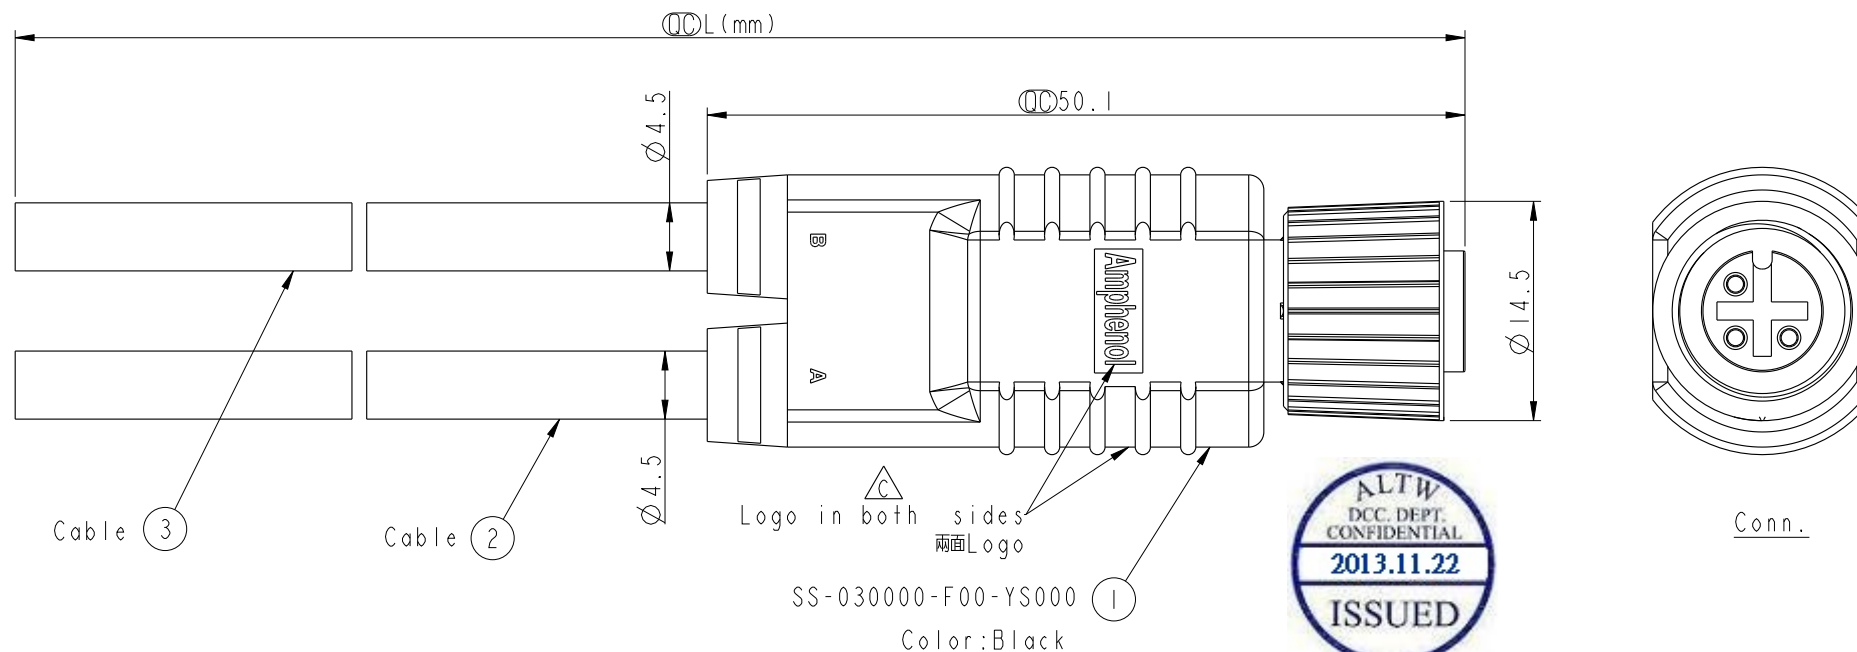

Pin Assignments
Front View



4	Black	黑	Black	黑
3	Blue	藍	Blue	藍
1	Brown	棕	Brown	棕
Conn.	A	B	Wire Color	
			Pin Out	

SS-030000-F00-YSBXX

XX: 01~99Meters
01: 01Meter
02: 02Meters

99: 99Meters
Cable Length(L): 01~99Meters

Note:

- * Important Dimension.
- * Waterproof Rate: IP68.
- * IP68: 1M Depth Of Water In 24hours.
- * Housing: PU, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Cable: 22AWG*3C+Talcum, PU Jacket, Black, OD=4.5mm.
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm
TOLERANCE
±0.5mm

TITLE M12 Cable Screw 3Pin F Conn F Pin			
SCALE 1:1	SIZE A4	SHEET 1	OF 1
REV. C	WC-REV. A.3	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Cary_liu	DATE 2013/09/11
DWG NO SS-030000-F00-YSBXX	CHECKED BY Tom_gu	DATE 2013/09/11
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013/09/11