




Rating	16A 125VAC, 10A 250VAC 	Mounting Hole
	10(4)A 250V~ 	
Contact Resistance	50m ohm Max.	 
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-25°C~85°C	
Switch Function	3P SPST ON-OFF (Neon dependent)	



***MATERIAL:**

Frame: Nylon 66, Black

Actuator: PC, Red clear

Waterproof rubber: Silicone






Terminals: Silver plated, Copper alloy

Hot Stamping: None

Waterproof: IP65

Thickness: 0.7~2.5

Circuit Diagram

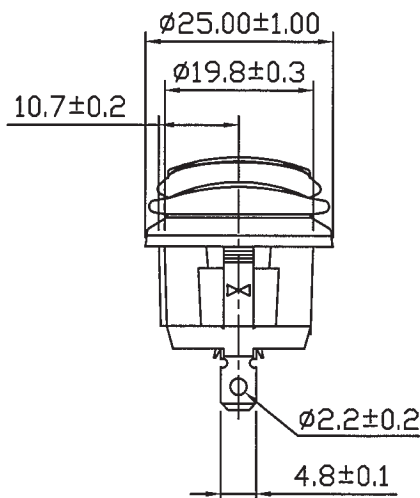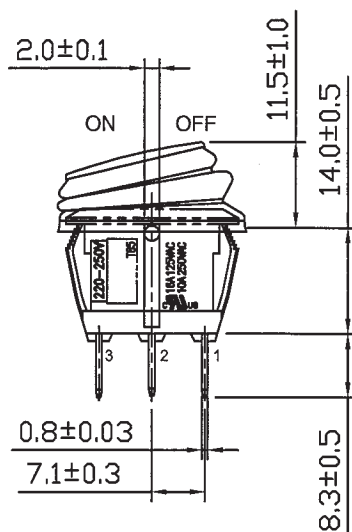

C8\R13\R13-112B8-02(1823705)_1

09/17/14	曹盈芳	本體刻字更新, 重新出圖				△	
Date	Name	Description				NO	
Drawn	Checked	Approved	SCI BOM NO.	1823705	Model Name	ROCKER SWITCH	
曹盈芳		王伯山	Customer No.		Model No.	R13-112B8-02	Rev. 1
09/17/14		9/17/14	Unit	mm	Shin Chin Industrial Co., Ltd.		