REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-710100~103	2007/01/12	R.Bondoc	Change Nut BAB0040N100 To BEA00010016.
C	LEN-920185~188	2009/02/04	Vicky	Update the drawing.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

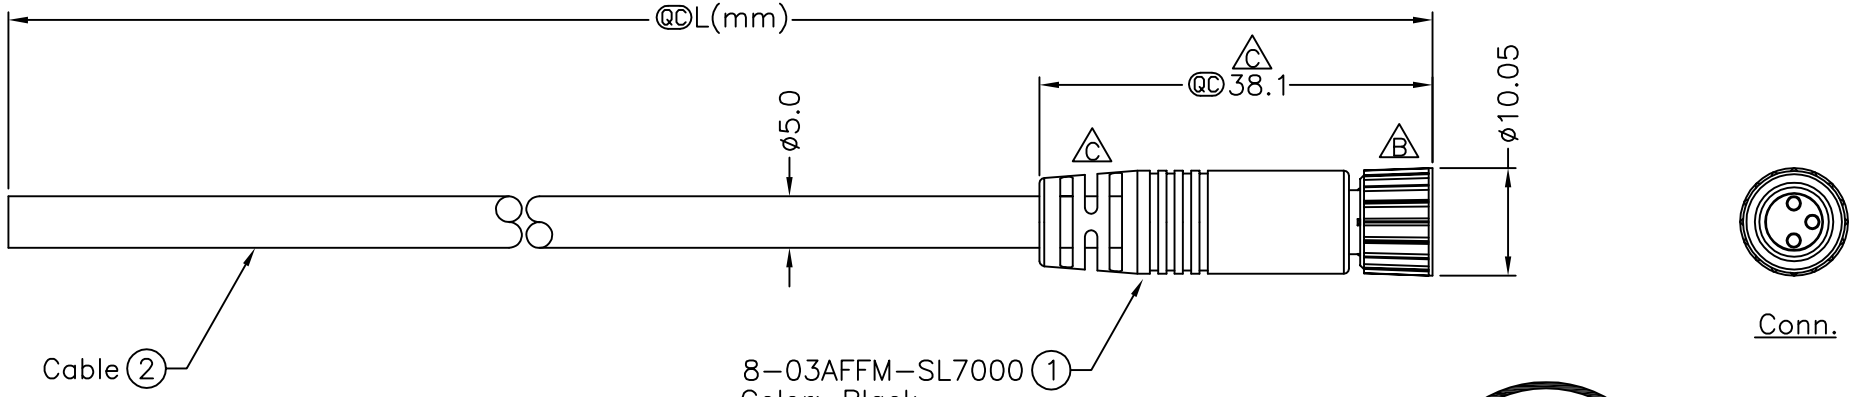

ALTW
CONFIDENTIAL
2009.02.04
R&D DEPT.

ALTW
DCC. DEPT.
CONFIDENTIAL
2009.02.17
ISSUED

8-03AFFM-SL7AXX

XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

Notes:
* QC Important Dimension.
* Waterproof Rate:IP67.
* Connector:Black,PU.
* Female Pin:Copper Alloy,Gold Plated.
* Cable:UL2464 22AWG*3C+Talcum,Black, PVC Jacket,UV Resistant,OD=5.0mm.
C * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

Conn.	Wire Color
4	Black 黑
3	Blue 藍
1	Brown 棕

Pin Out

UNIT:mm	TITLE: C M8 Conn Cable Screw 3P F Conn F Pin	ITEM NO	DRAWN BY: Vicky / DATE: 2009/02/04
TOLERANCE: ±0.5 mm	SCALE: Free / SHEET: 1 OF 1	DWG NO: 8-03AFFM-SL7AXX	CHECKED BY: Ivan / DATE: 2009/02/04
	REV: C / SIZE: A4 / QC :Inspection Item	CUSTOMER: ALTW	APPROVED BY: Luke / DATE: 2009/02/04

Amphenol LTW
安費諾亮泰企業股份有限公司

FMWI0702-01-01A2

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА