

圖號 DRAWING No. :

品名 NAME: Ring

ITEM No. :

## 校訂版次 REVISIONS

| 版次 | 記述 DESCRIPTION | DATE      | 核可   |
|----|----------------|-----------|------|
| 1  | 產品尺寸更改         | 106/08/25 | ANDY |
|    |                |           |      |
|    |                |           |      |


## MAXIMUM ELECTRIC CURRENT

|         |    |    |
|---------|----|----|
| A. W. G | 16 | 14 |
| MAX AMP | 18 | 30 |

## NOTE:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. SHRINK TEMP: 150°C  
OPERATING TEMP: -10°C ~ 105°C
3. BRAZED SEAM
4. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm<sup>2</sup>  
INSULATED COLOR: BLUE
5. MATERIAL THICKNESS: t  
TOLERANCE: ±0.05

| WIRE RANGE<br>AWG/mm <sup>2</sup>    | 產品編號<br>ITEM NO. | d2<br>±0.20 | B<br>±0.20 | L<br>±2.00 | E<br>±2.00 | d1<br>±0.20 | t   |
|--------------------------------------|------------------|-------------|------------|------------|------------|-------------|-----|
| 16-14 AWG<br>1.5-2.5 mm <sup>2</sup> |                  | 3.7         | 8.5        | 30.0       | 20.5       | 2.3         | 0.8 |
|                                      | ST-081/B-T       | 4.3         | 8.5        | 30.0       |            |             |     |
|                                      |                  | 5.3         | 8.5        | 30.0       |            |             |     |
|                                      |                  | 6.5         | 12.0       | 33.5       |            |             |     |
|                                      |                  | 8.4         | 12.0       | 33.5       |            |             |     |
|                                      |                  | 10.5        | 13.6       | 37.2       |            |             |     |

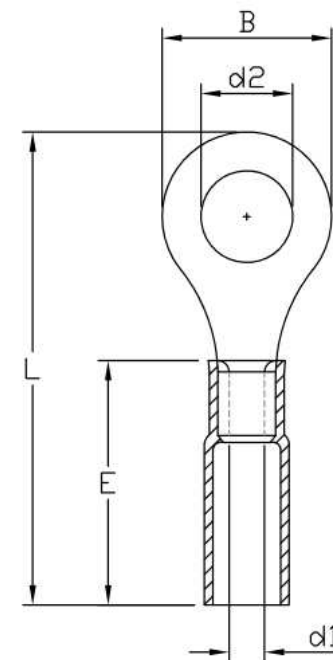

## 認可 APPROVALS

第三視角  
THIRD VIEW

## MATERIAL

單位 UNIT

製圖 DRAFT: TINA

INSULATION: HEAT-SHRINK TUBE

m/m

設計 DESIGN: KEN

MATERIAL: COPPER

比例 SCALE

核可 CHECKED: ANDY

TIN PLATING

日期 DATE: 2015. 01. 05