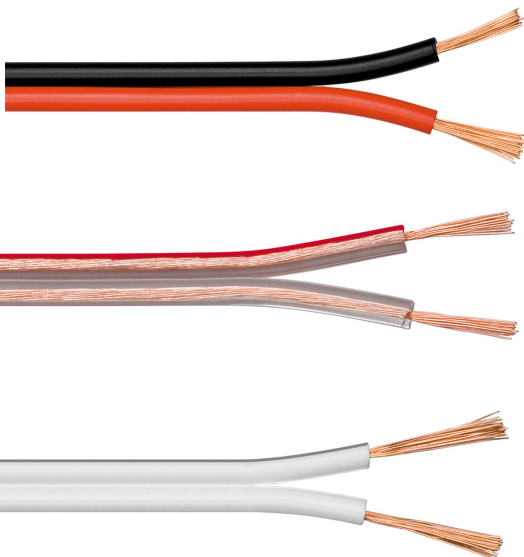
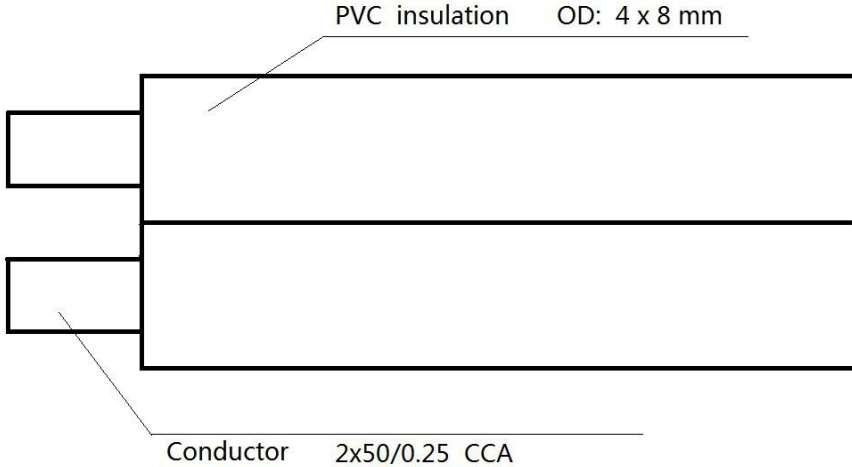
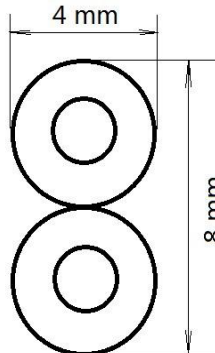





	1	2	3	4	5	6	7	8	9	10	11	12	13	14																																																					
A	  														A																																																				
B															B																																																				
C															C																																																				
D															D																																																				
E	<table><tr><th>Product</th><th>Name</th><th colspan="3">Speaker Cable</th><th rowspan="4">Electrical Characteristics (20°C)</th><th colspan="2">Max.Conductor DC Resistan at 20°C (Ω/M) 0.012</th></tr><tr><td rowspan="3">Conductor</td><td>Material</td><td colspan="4">Copper Coated Aluminum</td><td colspan="2" rowspan="3">Rated Voltage (V) ≤36</td></tr><tr><td>Nom.O.D. (mm)</td><td>2x50/0.25 (2x2.5mm²)</td><td>Up</td><td>+0.02</td></tr><tr><td></td><td></td><td>Down</td><td>-0.02</td></tr><tr><td rowspan="4">Jacket</td><td>External O.D.</td><td>4mm×2c</td><td>Up</td><td>+0.05</td><td rowspan="2">Sheath Physical Properties</td><td colspan="2" rowspan="2">Rated Temperature(°C) 70°C</td></tr><tr><td></td><td></td><td>Down</td><td>-0.05</td></tr><tr><td>Surface</td><td colspan="3">Smooth</td><td>View</td><td colspan="2"></td></tr><tr><td>Material</td><td colspan="3">PVC(complies RoHS Reach) CPR(Eca)</td><td>Drawn By</td><td colspan="2"></td></tr><tr><td colspan="5"></td><td>Page</td><td colspan="2"></td></tr></table>						Product	Name	Speaker Cable			Electrical Characteristics (20°C)	Max.Conductor DC Resistan at 20°C (Ω/M) 0.012		Conductor	Material	Copper Coated Aluminum				Rated Voltage (V) ≤36		Nom.O.D. (mm)	2x50/0.25 (2x2.5mm²)	Up	+0.02			Down	-0.02	Jacket	External O.D.	4mm×2c	Up	+0.05	Sheath Physical Properties	Rated Temperature(°C) 70°C				Down	-0.05	Surface	Smooth			View			Material	PVC(complies RoHS Reach) CPR(Eca)			Drawn By								Page			E		
Product	Name	Speaker Cable			Electrical Characteristics (20°C)	Max.Conductor DC Resistan at 20°C (Ω/M) 0.012																																																													
Conductor	Material	Copper Coated Aluminum				Rated Voltage (V) ≤36																																																													
	Nom.O.D. (mm)	2x50/0.25 (2x2.5mm²)	Up	+0.02																																																															
			Down	-0.02																																																															
Jacket	External O.D.	4mm×2c	Up	+0.05	Sheath Physical Properties	Rated Temperature(°C) 70°C																																																													
			Down	-0.05																																																															
	Surface	Smooth			View																																																														
	Material	PVC(complies RoHS Reach) CPR(Eca)			Drawn By																																																														
					Page																																																														
F	<table><tr><th>no.</th><th>Packaging</th><th>Length (m)</th><th>color</th></tr><tr><td>67723</td><td>Cable coil</td><td>10</td><td>transparent</td></tr><tr><td>67724</td><td>Cable coil</td><td>25</td><td>transparent</td></tr><tr><td>52082</td><td>Cable coil</td><td>50</td><td>transparent</td></tr><tr><td>15020</td><td>Cable Reel</td><td>100</td><td>transparent</td></tr><tr><td>67750</td><td>Cable coil</td><td>10</td><td>white</td></tr><tr><td>67751</td><td>Cable coil</td><td>25</td><td>white</td></tr><tr><td>67752</td><td>Cable coil</td><td>50</td><td>white</td></tr><tr><td>27525</td><td>Cable Reel</td><td>100</td><td>white</td></tr><tr><td>67735</td><td>Cable coil</td><td>10</td><td>red/black</td></tr><tr><td>67736</td><td>Cable coil</td><td>25</td><td>red/black</td></tr><tr><td>67737</td><td>Cable coil</td><td>50</td><td>red/black</td></tr><tr><td>15024</td><td>Cable Reel</td><td>100</td><td>red/black</td></tr></table>														no.	Packaging	Length (m)	color	67723	Cable coil	10	transparent	67724	Cable coil	25	transparent	52082	Cable coil	50	transparent	15020	Cable Reel	100	transparent	67750	Cable coil	10	white	67751	Cable coil	25	white	67752	Cable coil	50	white	27525	Cable Reel	100	white	67735	Cable coil	10	red/black	67736	Cable coil	25	red/black	67737	Cable coil	50	red/black	15024	Cable Reel	100	red/black	F
no.	Packaging	Length (m)	color																																																																
67723	Cable coil	10	transparent																																																																
67724	Cable coil	25	transparent																																																																
52082	Cable coil	50	transparent																																																																
15020	Cable Reel	100	transparent																																																																
67750	Cable coil	10	white																																																																
67751	Cable coil	25	white																																																																
67752	Cable coil	50	white																																																																
27525	Cable Reel	100	white																																																																
67735	Cable coil	10	red/black																																																																
67736	Cable coil	25	red/black																																																																
67737	Cable coil	50	red/black																																																																
15024	Cable Reel	100	red/black																																																																
G															G																																																				
H															H																																																				
I	<table><tr><th colspan="3">Änderungen</th><th>Datum</th><th>Name</th><th>Bezeichnung</th><th>Blatt</th></tr><tr><td>Datum</td><td>Name</td><td>gez.:</td><td>12.08.2021</td><td>TL</td><td rowspan="2">LSK 2x2,5mm²</td><td rowspan="2">1/1</td></tr><tr><td>12.08.2021</td><td>TL</td><td>gepr.:</td><td></td><td></td></tr><tr><td></td><td></td><td>Norm:</td><td></td><td></td><td rowspan="3">Zeichnungs-Nr.: 27525 15020 15024 67752 52082 67737 67751 67724 67736 67750 67723 67735</td><td rowspan="3">von</td></tr><tr><td colspan="5">Änderungen vorbehalten / Subject to change</td></tr></table>												Änderungen			Datum	Name	Bezeichnung	Blatt	Datum	Name	gez.:	12.08.2021	TL	LSK 2x2,5mm²	1/1	12.08.2021	TL	gepr.:					Norm:			Zeichnungs-Nr.: 27525 15020 15024 67752 52082 67737 67751 67724 67736 67750 67723 67735	von	Änderungen vorbehalten / Subject to change					I																							
Änderungen			Datum	Name	Bezeichnung	Blatt																																																													
Datum	Name	gez.:	12.08.2021	TL	LSK 2x2,5mm²	1/1																																																													
12.08.2021	TL	gepr.:																																																																	
		Norm:			Zeichnungs-Nr.: 27525 15020 15024 67752 52082 67737 67751 67724 67736 67750 67723 67735	von																																																													
Änderungen vorbehalten / Subject to change																																																																			
J	Eca Fire class (CPR) according to DIN EN 13501-6 												J																																																						
	1	2	3	4	5	6	7	8	9	10	11	12	13	14																																																					