IXYS

Advance Technical Information

LinearL2™ Power MOSFET w/ Extended FBSOA

IXTH110N10L2
IXTT110N10L2

V_{DSS} = 100V
I_{D25} = 110A
$R_{DS(on)}$ ≤ 18mΩ

N-Channel Enhancement Mode
Guaranteed FBSOA
Avalanche Rated



TO-247 (IXTH)



TO-268 (IXTT)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	100	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	100	V
V_{GSS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	110	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	300	A
I_A	T_C = 25°C	110	A
E_{AS}	T_C = 25°C	3	J
P_D	T_C = 25°C	600	W
T_J		-55 to +150	°C
T_{JM}		+150	°C
T_{stg}		-55 to +150	°C
T_L	1.6mm (0.063in) from Case for 10s	300	°C
T_{SOLD}	Plastic Body for 10s	260	°C
M_d	Mounting Torque (TO-247)	1.13/10	Nm/lb.in.
Weight	TO-247	6.0	g
	TO-268	4.0	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 250μA	100			V
$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	2.5		4.5	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±100	nA
I_{DSS}	V_{DS} = V_{DSS}, V_{GS} = 0V			5	μA
	T_J = 125°C			50	μA
$R_{DS(on)}$	V_{GS} = 10V, I_D = 0.5 • I_{D25}, Note 1			18	mΩ

Features

- Designed for Linear Operation
- International Standard Packages
- Avalanche Rated
- Integrated Gate Resistor for Easy Paralleling
- Guaranteed FBSOA at 75°C

Advantages

- Easy to Mount
- Space Savings
- High Power Density

Applications

- Solid State Circuit Breakers
- Soft Start Controls
- Linear Amplifiers
- Programmable Loads
- Current Regulators

© 2010 IXYS CORPORATION, All Rights Reserved

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 10V, I_D = 0.5 • I_{D25}, Note 1	45	55	65	S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		10.5		nF
C_{oss}			1585		pF
C_{rss}			420		pF
R_{Gi}	Gate Input Resistance		1.8		Ω
$t_{d(on)}$	**Resistive Switching Times** V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25} R_G = 2.2Ω (External)		28		ns
t_r			130		ns
$t_{d(off)}$			99		ns
t_f			24		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		260		nC
Q_{gs}			52		nC
Q_{gd}			106		nC
R_{thJC}				0.21	°C/W
R_{thCS}	TO-247		0.21		°C/W

Safe Operating Area Specification

Symbol	Test Conditions	Characteristic Values Min.	Typ.	Max.	
SOA	V_{DS} = 80V, I_D = 3.6A, T_C = 75°C, tp = 5s	360			W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			110	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			440	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.4	V
t_{rr}	I_F = 55A, -di/dt = 100A/µs, V_R = 50V, V_{GS} = 0V		230		ns
I_{RM}			19.4		A
Q_{RM}			2.2		µC

Note 1. Pulse test, t ≤ 300µs; duty cycle, d ≤ 2%.

ADVANCE TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

TO-247 (IXTH) Outline

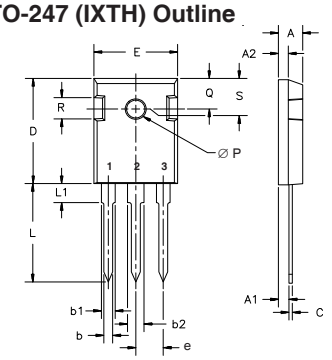

Terminals: 1 - Gate 2 - Drain
3 - Source Tab - Drain

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
∅P	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15 BSC		242 BSC	

TO-268 (IXTT) Outline

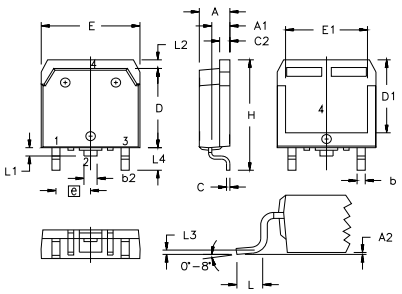

Terminals: 1 - Gate 2 - Drain
3 - Source Tab - Drain

SYM	INCHES MIN	MAX	MILLIMETERS MIN	MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
A2	.001	.010	0.02	0.25
b	.045	.057	1.15	1.45
b2	.075	.083	1.90	2.10
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.488	.500	12.40	12.70
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
e	.215 BSC		5.45 BSC	
H	.736	.752	18.70	19.10
L	.094	.106	2.40	2.70
L1	.047	.055	1.20	1.40
L2	.039	.045	1.00	1.15
L3	.010 BSC		0.25 BSC	
L4	.150	.161	3.80	4.10

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

Fig. 1. Output Characteristics @ T_J = 25ºC

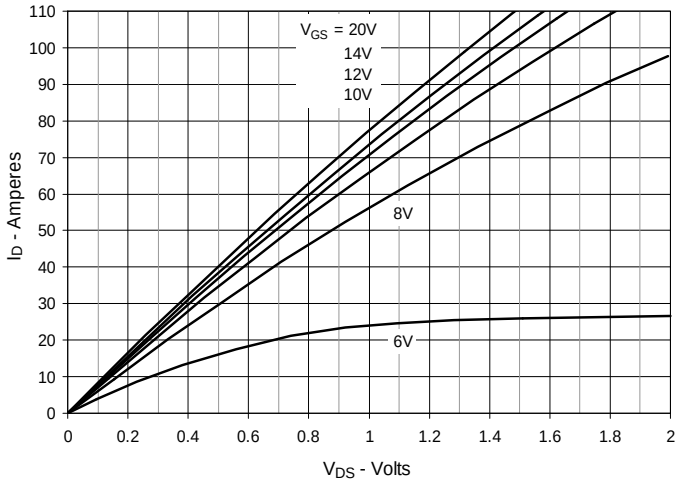

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

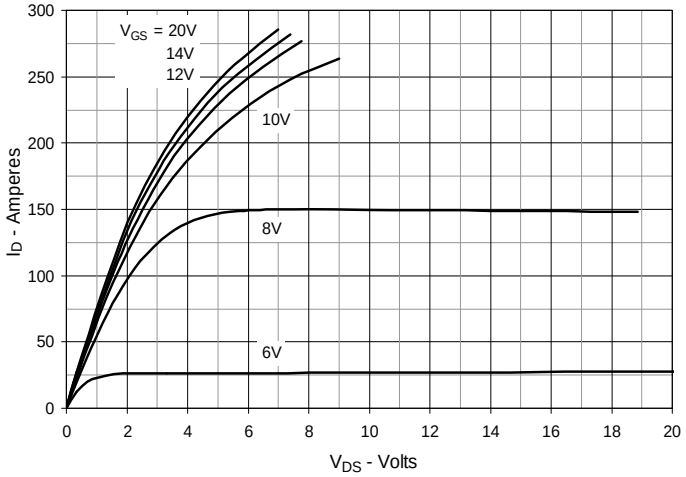

Fig. 3. Output Characteristics @ T_J = 125ºC

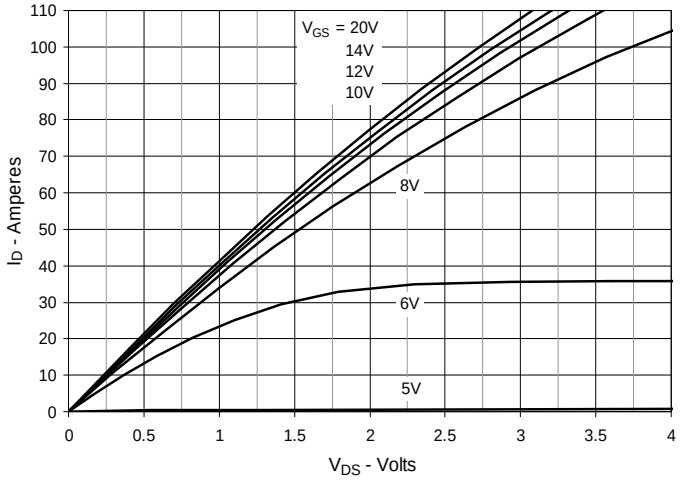

Fig. 4. $R_{DS(on)}$ Normalized to I_D = 55A Value vs. Junction Temperature

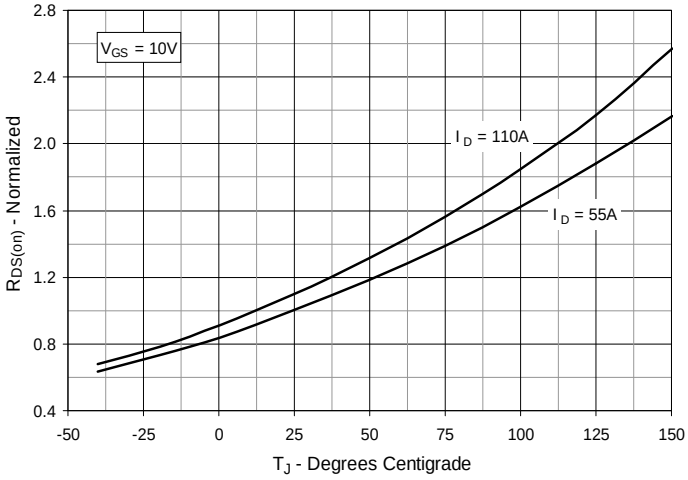

Fig. 5. $R_{DS(on)}$ Normalized to I_D = 55A Value vs. Drain Current

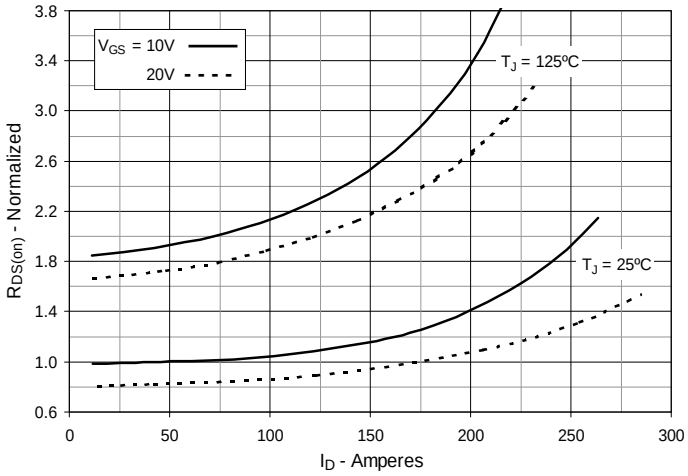

Fig. 6. Maximum Drain Current vs. Case Temperature

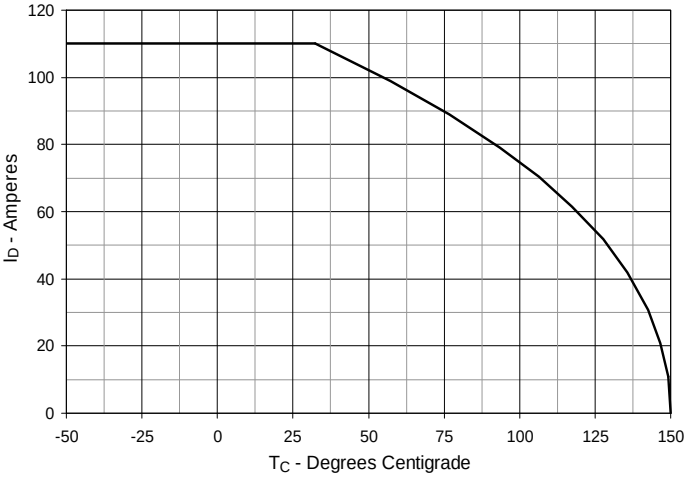

© 2010 IXYS CORPORATION, All Rights Reserved

Fig. 7. Input Admittance

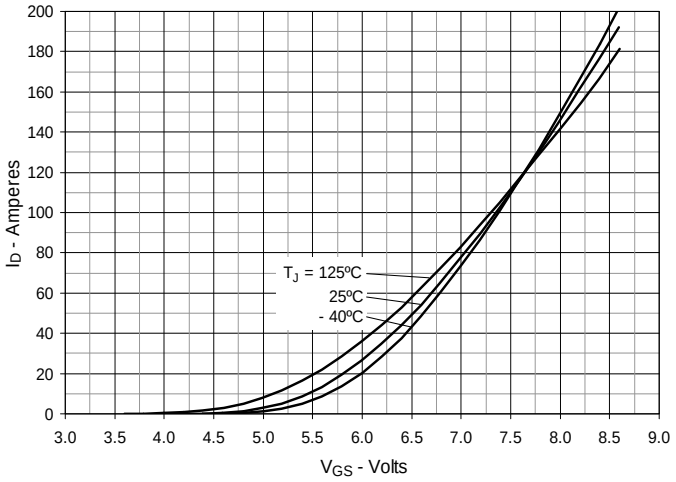

Fig. 8. Transconductance

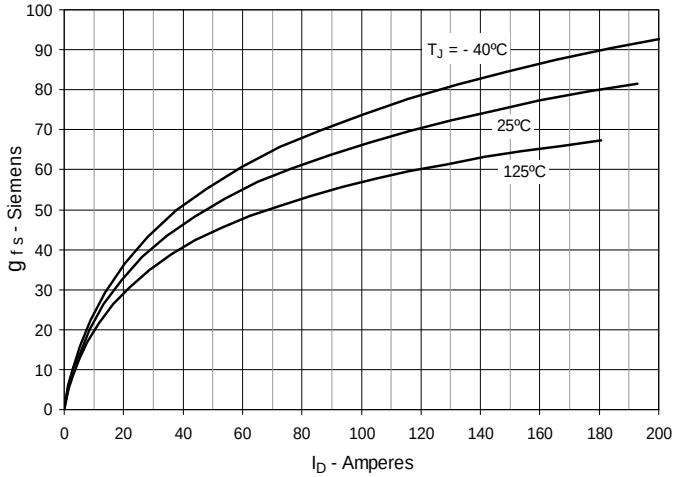

Fig. 9. Forward Voltage Drop of Intrinsic Diode

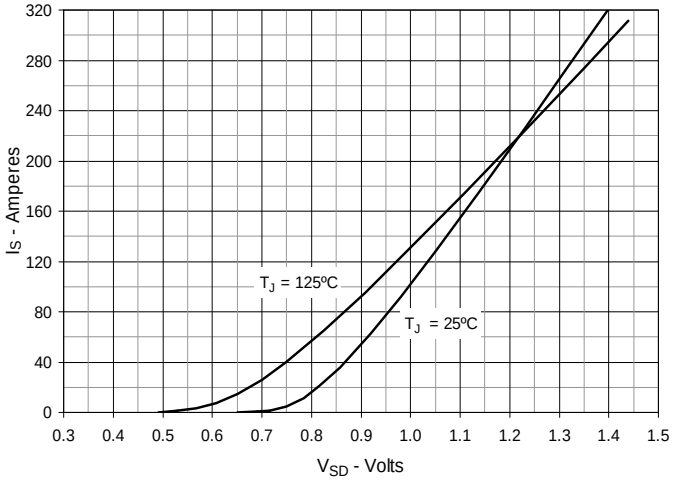

Fig. 10. Gate Charge

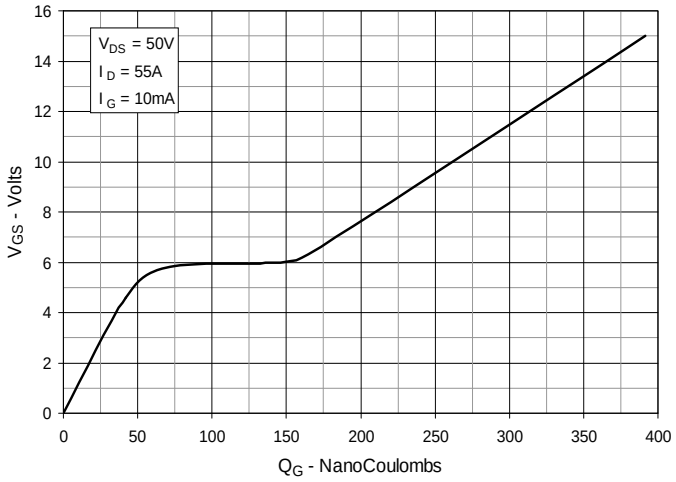

Fig. 11. Capacitance

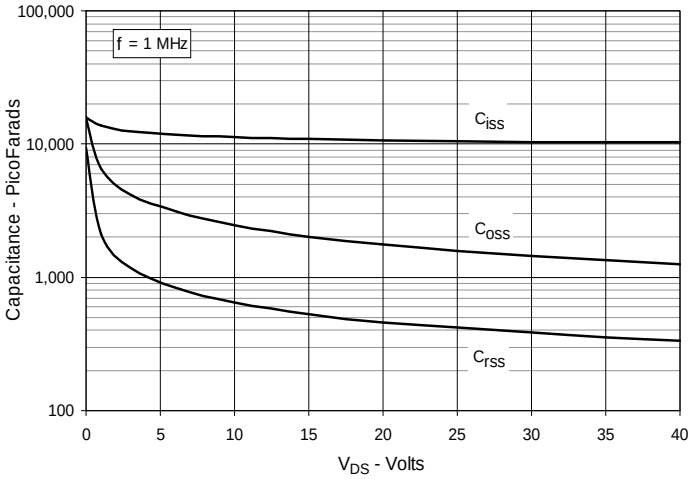

Fig. 12. Maximum Transient Thermal Impedance

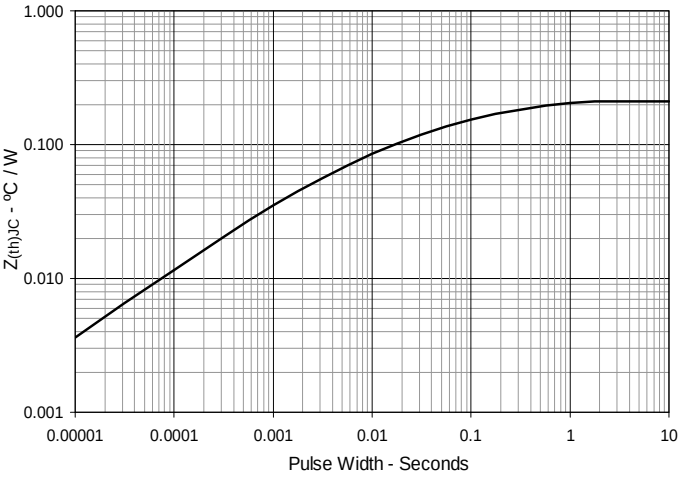

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Forward-Bias Safe Operating Area @ T_C = 25ºC

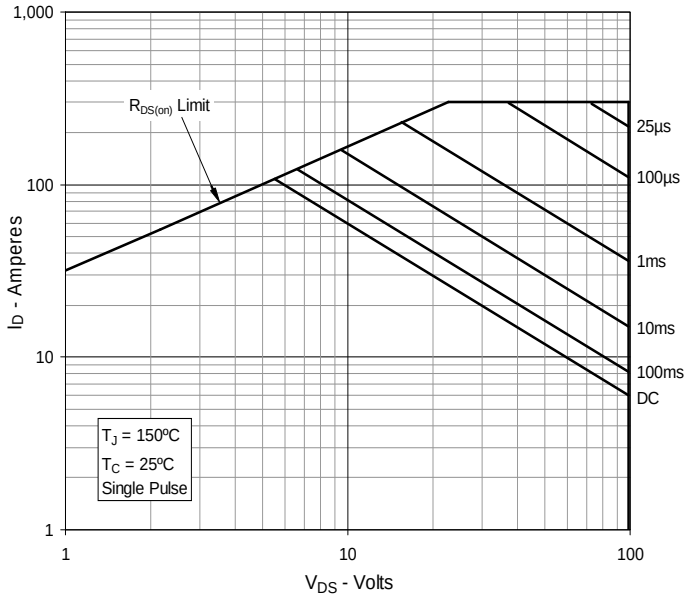

Fig. 14. Forward-Bias Safe Operating Area @ T_C = 75ºC

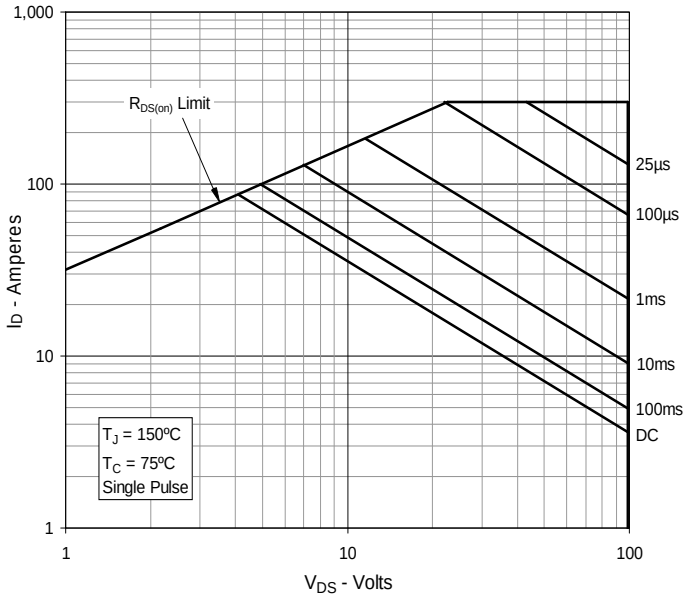

© 2010 IXYS CORPORATION, All Rights Reserved

IXYS
A Littelfuse Technology

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.