

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD

M

REV PER 0G3A-0256-04

13APR04

JR




TM

1 FOR 4.75 [.187] MAX WIRE INSULATION DIA


2 SUPERSEDED BY 36964

3 MATERIAL: BODY; COPPER PER ASTM B152
INSULATION; PVC
COLOR; PURPLE


4 FINISH: BODY; TIN PLATE PER ASTM B-545



STAMPING DETAIL



INSULATION BODY

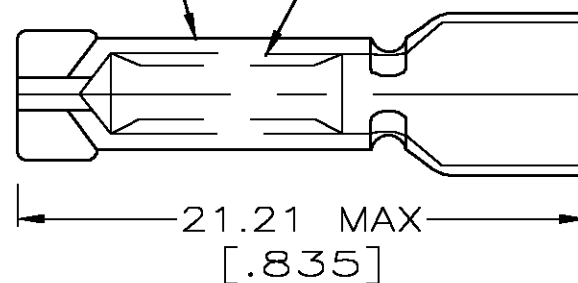

100	LOOSE PC,BOX	8-36964-1
20000	BOX	2-36964-5
2500	TAPE MOUNTED	2-36964-2
-	LOOSE PIECE	36964
QTY	DESCRIPTION	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMSMAX RECOMMENDED OPERATING
TEMPERATURE:
90° C MAX

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
G KRUPER 1/93CHK
R HERSEY 1/93APVD
M ELLIS 1/93

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics Corporation
Harrisburg, Pa 17105-3608NAME
SPLICE, WIRE, CLOSED END

SIZE CAGE CODE DRAWING NO RESTRICTED TO


A3 00779 C-36964

SCALE 4:1 SHEET 1 OF 1 REV M

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:
INCHESTOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± 0.20[.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL

- 3

FINISH

- 4