

Braukmann

F78TS

Reverse rinsing fine filter with flanges

Application

F78TS flanged reverse rinsing filters are for installations with high water demand. They can be used in large residential buildings, for central water supply and in commercial or industrial applications.

F78TS flanged filters have the same highly efficient reverse rinsing filtering system as the range of household fine filters. The F78TS can be retrofitted with the RR11S fully automatic reverse rinsing actuator and the DDS76 differential pressure switch.

The fine filter prevents the ingress of foreign bodies, for example rust particles, strands of hemp and grains of sand and thus reduces the probability of corrosion.

Approvals

- DVGW (for connection sizes DN65-DN100 with 100 µm mesh size)
- WRAS

Special Features

- LEAD-FREE: Pb content of all materials in contact with medium less than 0.1 %
- Filtered water supplied even during reverse rinsing
- Filter insert fully replaceable
- Patented reverse rinsing system - fast and thorough cleaning of the filter
- Fully automatic reverse rinsing with retrofittable automatic reverse rinsing actuator
- Differential pressure switch can be retrofitted
- Memory ring indicates when next manual reverse rinsing is due
- Polyamide coating gives high level of corrosion protection
- Forced flow provides optimal water exchange in the filter bowl
- ACS certified
- All materials are KTW approved
- DM174 conform
- Discharge of the reverse rinsed water according EN 1717
- 5-year warranty




Technical Data

Media	
Medium:	Drinking water
Connections/Sizes	
Flange connection	PN16 acc. to EN 1092-2
Single filter:	DN65 - DN100 DN125 with 2 extension flanges EXF125-A
2 filters parallel:	2 x DN80, 2 x DN100
Pressure values	
Max. operating pressure:	1.5 - 16 bar
Nominal pressure:	PN16
Operating temperatures	
Max. operating temperature medium accord. to EN 1567:	30 °C
Max. operating temperature medium:	65 °C (max. operating pressure 6 bar)
Specifications	
Installation position:	Horizontal, with filter bowl downwards

Note: The filter is constructed for drinking water installations. In case of a process water application the filter has to be proven individually.

Construction

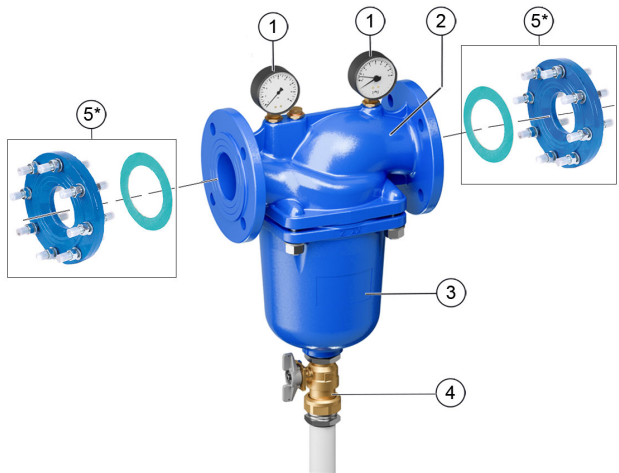Overview		Components	Materials
	1	2 pressure gauges (1x inlet, 1x outlet including memory indicator)	Metal
	2	Housing with pressure gauge ports (1x inlet, 2x outlet)	Ductile cast iron (EN-GJS-400-15 EN 1563), coated with PA (polyamide)
	3	Filter bowl	Ductile cast iron (EN-GJS-400-15 EN 1563), coated with PA (polyamide)
	4	Ball valve with drain funnel	Ball Valve body: Lead-free brass Ball: Stainless steel Drain adapter: Plastic
	5	Extension flanges for the connection size DN125	Ductile Cast Iron
Not depicted components:			
Inner parts			Stainless steel, red bronze, brass and plastic
Fine filter			Stainless steel

* Extension flanges for the connection size DN125: F78TS DN125 = 1 pcs. F78TS-100FA/FB/FC/FD + 2 pcs. EXF125-A. The extension flanges have to be ordered separately.

Method of Operation

The filter insert is divided into two parts. In the „filtering“ position, only the lower, larger section is used for filtering. The small upper section does not come in contact with unfiltered water. An oscillating flap integrated in the sieve prevents the deposition of dirt particles on the upper part of the filter. When the ball valve is opened for reverse rinsing, then the whole filter insert is pushed downwards until the water supply to the outer side of the main filter is stopped. Simultaneously, the water flow is opened to the upper part of the filter. The water needed for cleaning the filter passes through the upper filter section, then the rotating impeller with jets and the main filter from inside to outside, i.e. the filter is reverse rinsed with filtered water. The filter automatically switches back to the operating position when the ball valve is closed again.

Transportation and Storage

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	85 % *


*non condensing

Installation Guidelines

Setup requirements

- Install in horizontal pipework with filter bowl downwards
 - This position ensures optimum filter efficiency
- Install shut-off valves
- These filters are armatures which need to be maintained regularly
- Ensure good access
 - Pressure gauge can be read off easily
 - Simplifies maintenance and inspection
- The installation location should be protected against frost
- Related to the EN 806-2 it is recommended to install the filter immediately after the water meter
- In order to avoid flooding, it is recommended to arrange a permanent, professionally dimensioned wastewater connection

Installation Example

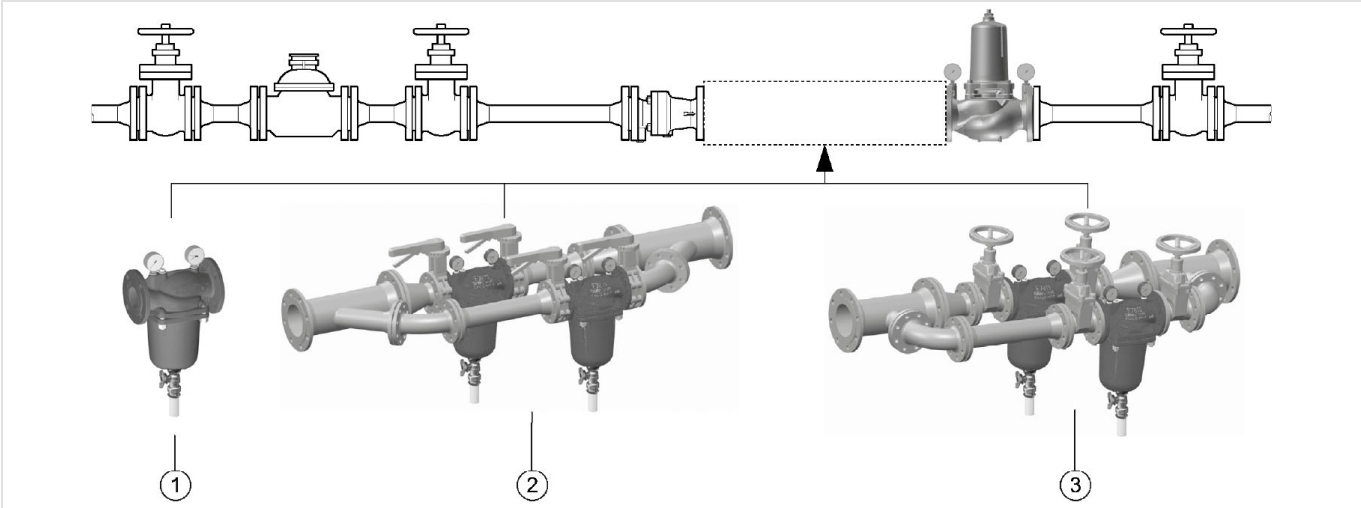


- 1 Single filter
- 2 2 filters parallel 45°
- 3 2 filters parallel 90°

Technical Characteristics

kvs-Values

	Single filter				2 filters parallel	
Nominal size diameter:	DN 65	DN 80	DN 100	DN 125	DN 80	DN 100
k _{VS} -value (m ³ /h):	69	113	145	145	226	290


Pressure drop characteristics

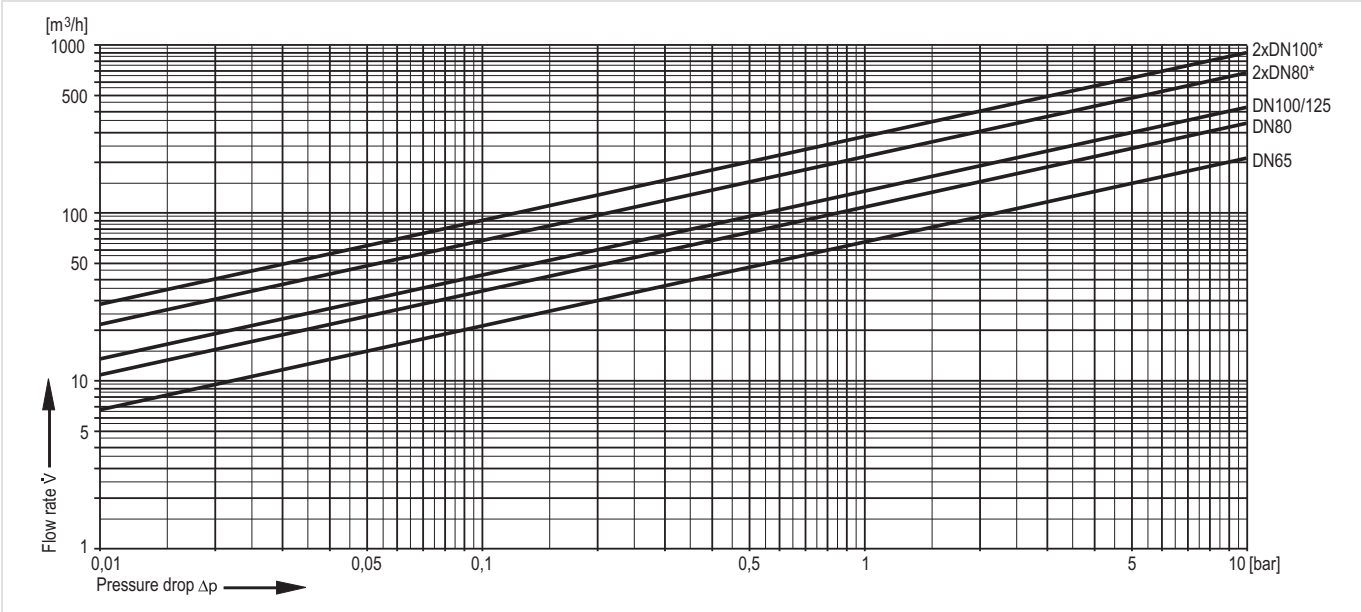

* 2 filters parallel

Dimensions

Overview

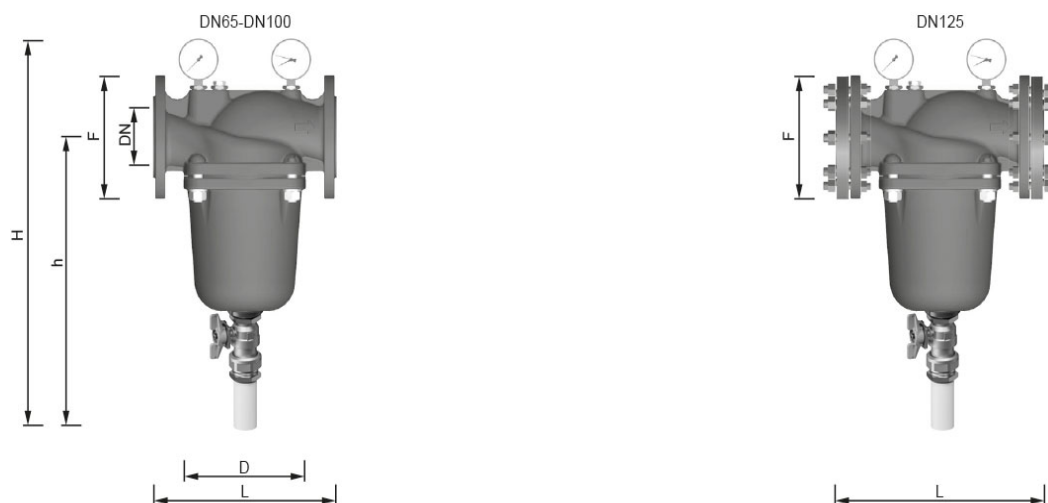

Parameter		Values					
		Single filter*				2 filters parallel	
Nominal sizes:	DN	DN 65	DN 80	DN 100	DN 125	DN 80	DN 100
Weight:	kg	25	35	43	65	n.a	n.a
Dimensions DN65-DN100:	L	290	310	350	420	n.a	n.a
	H	581	665	767	767	n.a	n.a
	h	434	508	610	610	n.a	n.a
	D	193	230	247	247	n.a	n.a
	F	185	200	220	250	n.a	n.a
Flow value at $\Delta p=0.2$ bar:	m ³ /h	30	48	60	60	96	120
Flow value at $\Delta p=0.5$ bar:	m ³ /h	48	78	100	100	156	200
DVGW registration number:		NW-9301CR0186				-	-

Note: All dimensions in mm unless stated otherwise.

* DN125 with 2 pcs. extension flanges (2 x EXF125-A to be ordered separately)

Ordering Information

The following tables contain all the information you need to make an order of an item of your choice.

Options

The filter is available in the following sizes: DN65, DN80 and DN100.

- standard
- not available

		F78TS-...FA	F78TS-...FB	F78TS-...FC	F78TS-...FD
Connection type:	Filter mesh size 100 μ m	•	-	-	-
	Filter mesh size 20 μ m	-	•	-	-
	Filter mesh size 50 μ m	-	-	•	-
	Filter mesh size 200 μ m	-	-	-	•

Note: ... = space holder for connection size

Note: Ordering number example for DN65 and type FA valve: F78TS-65FA


Note: Filters with other mesh widths available on request

Accessories

	Description	Dimension	Item No.
	RR11S	Automatic reverse rinsing actuator	
	For automatic filter cleaning at presettable intervals		
	230 V, 50/60 Hz, with BMS connection; wall power adaptor EU		RR11S-A
	230 V, 50/60 Hz, with BMS connection; wall power adaptor UK		RR11S-AGB
	DDS76	Differential pressure switch	
		DN65/80/100	DDS76-1
	EXF125-A	Extension flange DN125	
	Adapter flanges DN100 to DN125 Ductile iron, PN16 acc. ISO 7005-2 and EN 1092-2. Overall length with adapter flanges (without bolts) DN125 L=416mm, including bolts, nuts and the seal disc.		
			EXF125-A

Spare Parts

F78TS Fine Filters with Flanges from 2015 onwards

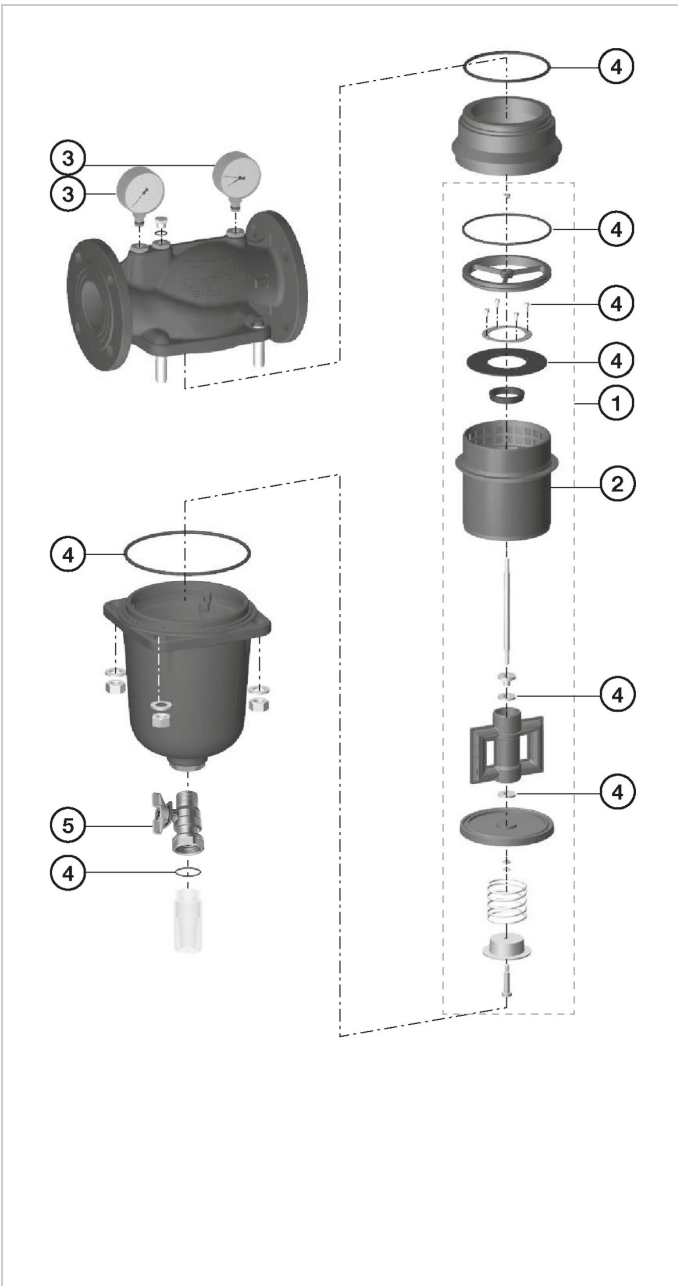Overview	Description	Dimension	Item No.
	1 Filter insert complete		
	Filter mesh 100 µm	DN65	AF78TS-065A
	Filter mesh 100 µm	DN80	AF78TS-080A
	Filter mesh 100 µm	DN100	AF78TS-100A
	Filter mesh 50 µm	DN65	AF78TS-065C
	Filter mesh 50 µm	DN80	AF78TS-080C
	Filter mesh 50 µm	DN100	AF78TS-100C
	Filter mesh 200 µm	DN65	AF78TS-065D
	Filter mesh 200 µm	DN80	AF78TS-080D
	Filter mesh 200 µm	DN100	AF78TS-100D
2 Replacement sieve	Filter mesh 100 µm	DN65	ES78TS-065A
	Filter mesh 100 µm	DN80	ES78TS-080A
	Filter mesh 100 µm	DN100	ES78TS-100A
	Filter mesh 20 µm	DN65	ES78TS-065B
	Filter mesh 20 µm	DN80	ES78TS-080B
	Filter mesh 20 µm	DN100	ES78TS-100B
	Filter mesh 50 µm	DN65	ES78TS-065C
	Filter mesh 50 µm	DN80	ES78TS-080C
	Filter mesh 50 µm	DN100	ES78TS-100C
	Filter mesh 200 µm	DN65	ES78TS-065D
	Filter mesh 200 µm	DN80	ES78TS-080D
	Filter mesh 200 µm	DN100	ES78TS-100D
	Filter mesh 500 µm	DN65	ES78TS-065F
	Filter mesh 500 µm	DN80	ES78TS-080F
	Filter mesh 500 µm	DN100	ES78TS-100F
3 Pressure gauges		0 - 16 bar, G ¹ / ₄ "	M78M-A16
		0 - 16 bar, G ¹ / ₄ " with memory indicator	M78M-A16MR
4 Seal set complete		DN65	SOS78TS-065
		DN80	SOS78TS-080
		DN100	SOS78TS-100
5 Ball valve			
			KH78TS

resideo

Ademco 1 GmbH, Hardhofweg 40,
74821 MOSBACH, GERMANY
Phone: +49 6261 810

Manufactured for and on behalf of
Pittway Sàrl, Z.A., La Pièce 6,
1180 Rolle, Switzerland
by its authorised representative
Ademco 1 GmbH

Subject to change. EN0H-1178GE23 R0925
© 2025 Resideo Technologies, Inc.
All rights reserved.

For more information
resideo.com

This document contains proprietary information of Pittway Sàrl and its affiliated companies and is protected by copyright and other international laws. Reproduction or improper use without specific written authorization of Pittway Sàrl is strictly forbidden.