

Braukmann FK74CS/FKN74CS

Filter combination

with pressure reducing valve and reverse rinsing fine filter

Application

The filter combinations comprise reverse rinsing filter and pressure reducing valve in one appliance. They ensure a continuous supply of filtered water. The fine filter stops the ingress of foreign bodies, for example rust particles, strands of hemp and grains of sand and thus reduces the probability of corrosion. The pressure reducing valve prevents pressure damage and reduces water consumption.

The filter combinations are fitted in systems where a pressure reducing valve is required. Both horizontal and vertical installation is possible.

Approvals

- DVGW

approval for all filters with 100 µm mesh sizes and with rotatable connection piece

Special Features

- LEAD-FREE: Pb content of all materials less than 0.1 %
- Integral pressure reducing valve with balanced seat
- Inlet pressure balancing – no influence on outlet pressure by fluctuating inlet pressure
- Filtered water supplied even during reverse rinsing
- Patented reverse rinsing system - fast and thorough cleaning of the filter with small amount of water
- Memory ring indicates when next manual reverse rinsing is due
- Automatic reverse rinsing actuator with bayonet connector can be retrofitted
- Large filter surface
- Shock resistant clear synthetic material filter bowl enables easy checking of filter contamination
- Filter insert fully replaceable
- Standardised discharge connection
- ACS certified
- All materials are KTW approved
- Approved by TÜV LGA for low noise, Group 1 without limitations



Technical Data

Media	
Medium:	Drinking water
Connections/Sizes	
Connection sizes:	1/2" - 2" (with rotatable connector piece)
Pressure values	
Operating pressure range:	1.5 - 16 bar
Max. inlet pressure:	16 bar (up to 12 bar long*-term)
Outlet pressure:	1.5 - 6 bar adjustable
Operating temperatures	
Operating temperature range medium accord. to EN 1567:	5 - 30 °C
Specifications	
Installation position:	Horizontal or vertical, with filter bowl downwards

* For maintaining the measuring accuracy of the manometer, a continuous maximum pressure load of 12 bar is permitted.

Note: The filter is constructed for drinking water installations. In case of a process water application the filter has to be proven individually.

Construction

Overview			
	1	Adjustment handle	High-quality synthetic material
	2	Spring bonnet with internal adjustment screw	High-quality synthetic material
	3	Housing with pressure gauge	FK74CS-xx/xxLF 1/2" - 1 1/4" : High-quality synthetic material FK74CS-xxLF 1 1/2" - 2" : Lead-free brass
	4	Rotatable connector piece, flange sealings, connecting nuts and fittings (FK74CS only)	FK74CS-xx/xxLF 1/2" - 1 1/4" : Dezincification-resistant brass (rotatable connection piece, tail pieces, connection nuts), unitec 300 (flange sealing) FK74CS-xxLF 1/2" - 2" : Lead-free brass (rotatable connection piece, tail pieces, connection nuts), unitec 300 (flange sealing)
	5	Clear filter bowl	Shock-resistant, clear transparent synthetic material
	6	Fine filter	Stainless steel
	7	Ball valve with drain connection	Lead-free brass (Ball Valve body), Lead-free material (ball), Plastic-durethan (drain adapter)
	Not depicted components:		
	Memory ring		Plastic
Allen key		Stainless steel	
FK74CS-xx/xxLF 1/2" - 1 1/4" : WS6			
FK74CS-xxLF 1 1/2" - 2" : WS8			
Valve insert complete with diaphragm and valve seat		High-quality synthetic material	
Wrench for filter bowl and spring bonnet		Plastic	
Covers and reverse rinsing handle		Synthetic material	
Diaphragm		Fibre-reinforced NBR	
Sealing washers		EPDM	

Method of Operation

The filter combination combines reverse rinsing filter and pressure reducing valve in one appliance.

The filter insert comprises an upper part and a lower combination section. When in the „filtering“ position, the small upper filter is closed so that the water can only pass through the main filter from outside to inside. When the ball valve is opened for reverse rinsing, the filter is pushed downwards until the water supply to the outer side of the main filter is stopped. Simultaneously, the water flow is opened to the upper part of the filter. The water needed for cleaning the filter passes through the upper sieve, the rotating impeller and the main filter from inside to outside. By this means, the filter is fully cleaned over its whole surface area at the full inlet pressure. The filter automatically switches over to the operating position when the ball valve is closed again.

The integral pressure reducing valve functions on a balanced force principle whereby the force exerted by a diaphragm is balanced against the force of an adjustment spring. The inlet pressure has no influence on opening or closing of the valve. Inlet pressure fluctuation does not therefore affect the outlet pressure.

Transportation and Storage

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	85 % *

*non condensing


Installation Guidelines

Setup requirements


- The installation site has to be frost-proof and the protection of the device from chemicals, paints, detergents, solvents and their vapours and environmental influences must be guaranteed
- Install in horizontal or vertical pipework with filter bowl downwards
 - This position ensures optimum filter efficiency
- Install shut-off valves
- These filters are armatures which need to be maintained regularly
- Ensure good access
 - Pressure gauge can be read off easily
 - Degree of contamination can be easily seen with clear filter bowl
 - Simplifies maintenance and inspection
- It is recommended that a straight section of pipework at least five times the nominal valve size is provided after the filter (according to DIN EN 806-2)
- Fit immediately after water meter
- Related to the EN 806-2 it is recommended to install the filter immediately after the water meter
- In order to avoid flooding, it is recommended to arrange a permanent, professionally dimensioned wastewater connection

Installation Example

FK74CS-xx/xxLF 1/2" - 1 1/4"

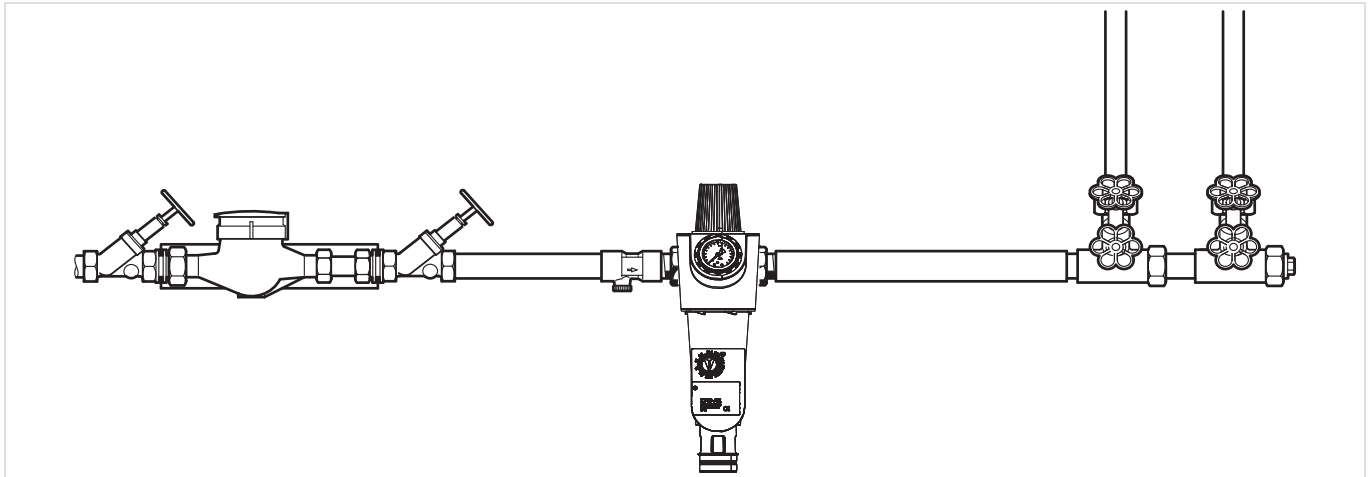

FK74CS-xxLF 1 1/2" - 2"

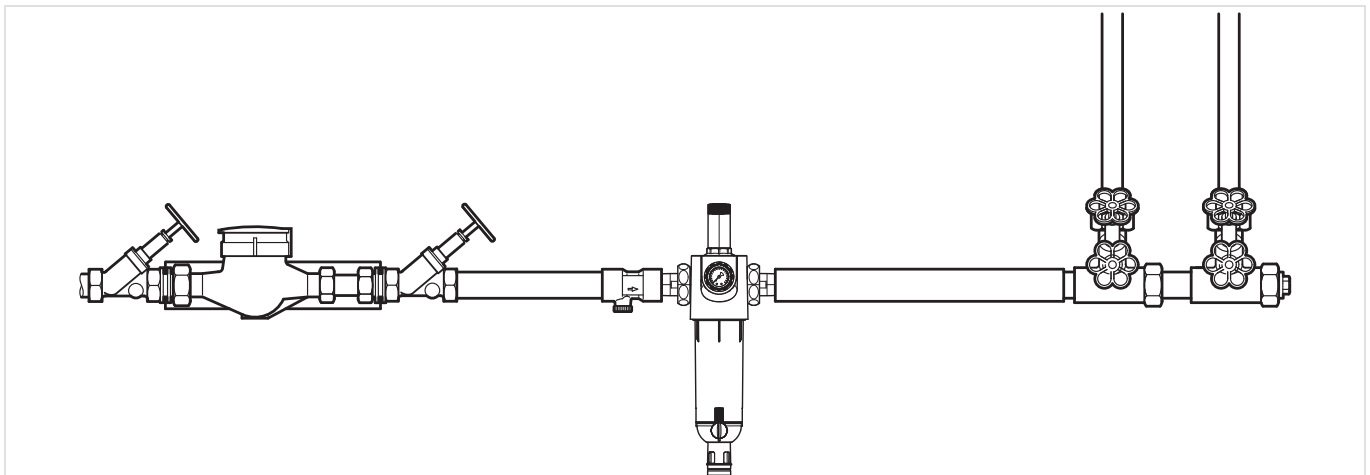


Technical Characteristics

kvs-Values


Connection sizes:	15	20	25	32	40	50
k _{VS} -value (m ³ /h):	4.5	5.8	6.2	6.5	11.5	11.5

Pressure drop characteristics

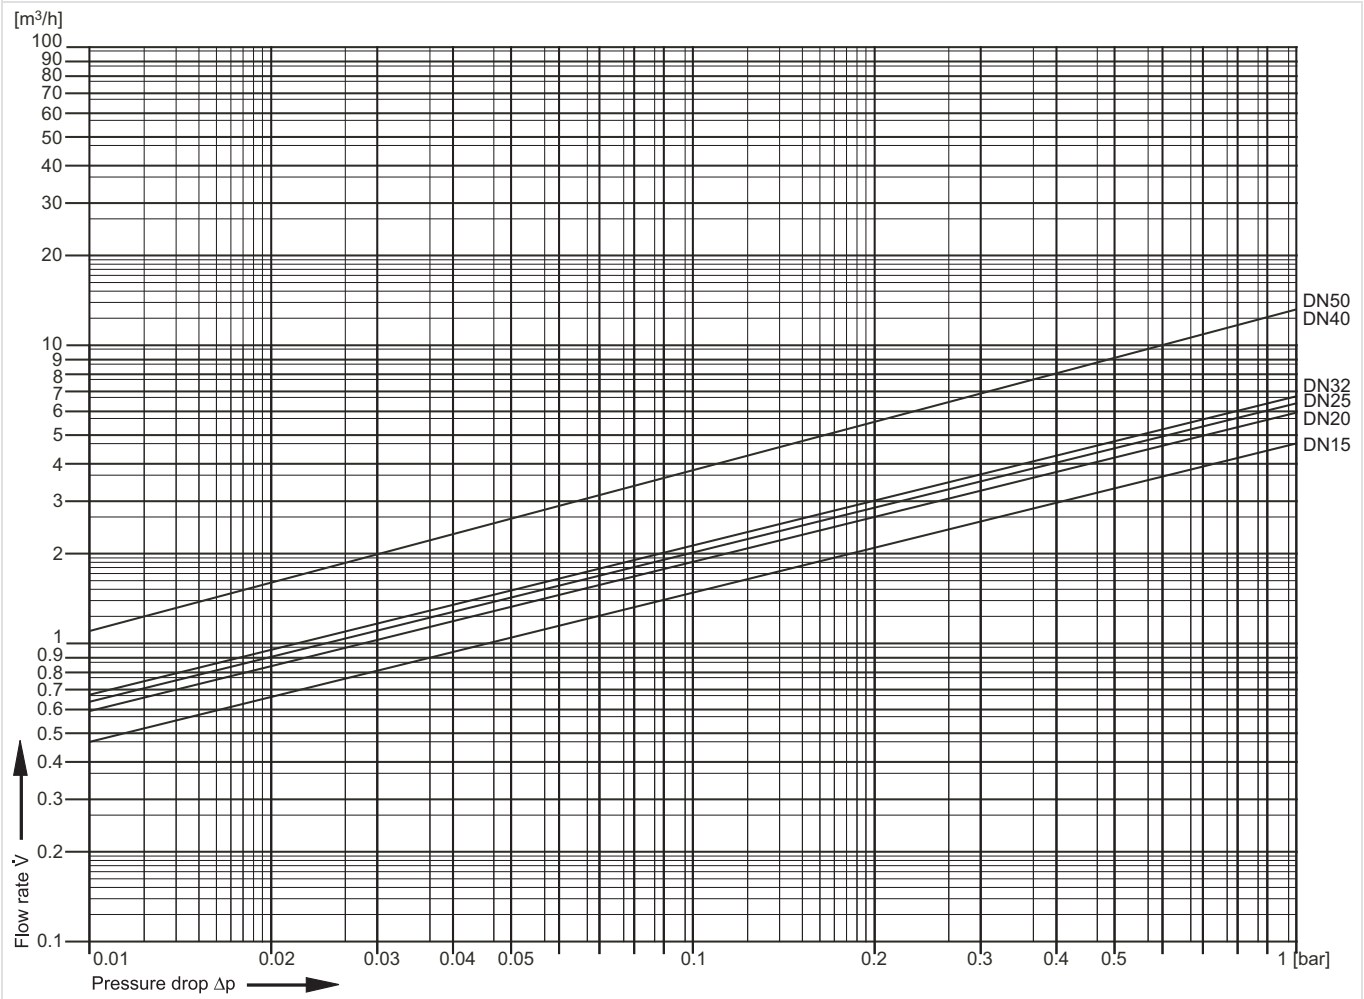

Dimensions

Overview

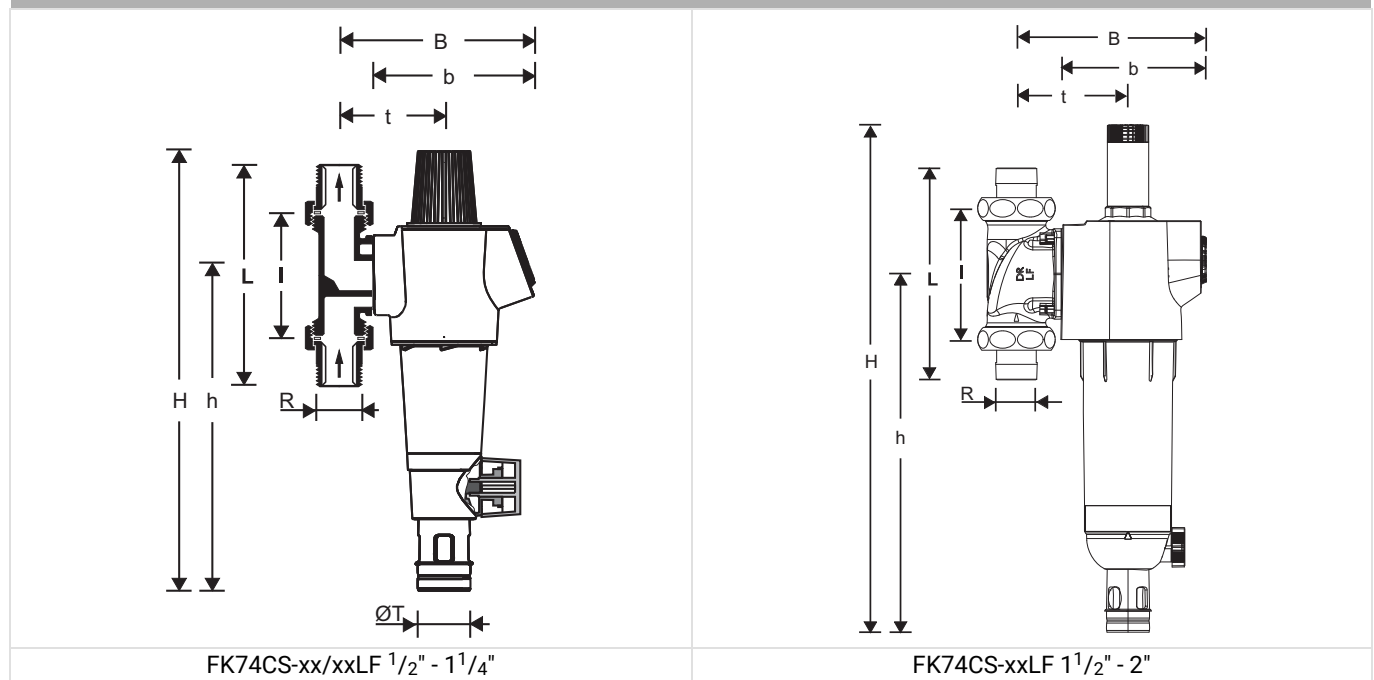

Parameter		Values					
Connection sizes:	R	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Nominal sizes:	DN	15	20	25	32	40	50
Weight:	kg	2.3	2.3	2.6	2.9	9.753	10.652
Dimensions:	H	415	415	415	415	590	590
	h	298	298	298	298	416	416
	L	150	158	179	197	246	267
	l	90	90	100	105	150	150
	B	178	178	178	182	216	216
	b	150	150	150	150	187	187
	t	92	92	92	96	130	130
	ØT	50	50	50	50	50	50
DVGW registration number:	NW-9311 CM 0032						

Note: All dimensions in mm unless stated otherwise.

Ordering Information

The following tables contain all the information you need to make an order of an item of your choice.
When ordering, please always state the type, the ordering or the part number.

Options

The filter combination is available in the following sizes: 1/2", 3/4", 1 1/2", 1 1/4", 1" and 2".

• standard

- not available

for connection sizes 1/2" - 1 1/4"

		FK74CS-...AA	FK74CS-...AC	FK74CS-...AD	FKN74CS-1A	FKN74-1C
Connection type:	With rotatable connector piece, filter mesh size 100 µm	•	-	-	-	-
	With rotatable connector piece, filter mesh size 50 µm	-	•	-	-	-
	With rotatable connector piece, filter mesh size 200 µm	-	-	•	-	-
	Retrofit version without rotatable connector piece, filter mesh size 100 µm	-	-	-	•	-
	Retrofit version without rotatable connector piece, filter mesh size 50 µm	-	-	-	-	•

Note: ... = space holder for connection size

for connection sizes 1/2" - 2"

		FK74CS-...LFAA	FKN74CS-1LFA	FKN74CS-2LFA
Connection type:	With rotatable connector piece, filter mesh size 95/110 µm, lead-free materials	•	-	-
	Retrofit version without rotatable connector piece, filter mesh size 95/110 µm, lead-free materials (for DA74CS-xxLFA rotatable connections 1/2" - 1 1/4")	-	•	-
	Retrofit version without rotatable connector piece, filter mesh size 95/110 µm, lead-free materials (for DA74CS-xxLFA rotatable connections 1 1/2" - 2")	-	-	•

Note: ... = space holder for connection size

Note: Ordering number example for 2" and type LFAA valve: FK74CS-2LFAA


Accessories

	Description		Dimension	Item No.
	DA74	Rotatable connector piece For connection of retrofit filters and filter combinations		
			1/2"	DA74CS-1/2A
			3/4"	DA74C-3/4A
			1"	DA74C-1A
			1 1/4"	DA74C-11/4A
		lead-free	1/2"	DA74CS-1/2LFA
		lead-free	3/4"	DA74CS-3/4LFA
		lead-free	1"	DA74CS-1LFA
		lead-free	1 1/4"	DA74CS-11/4LFA
		lead-free	1 1/2"	DA74CS-11/2LFA
		lead-free	2"	DA74CS-2LFA
		lead-free, no connection parts	1/2" - 3/4"	DA74CS-1/2LFE
		lead-free, no connection parts	1"	DA74CS-1LFE
		lead-free, no connection parts	1 1/4"	DA74CS-11/4LFE
		lead-free, no connection parts	1 1/2" - 2"	DA74CS-2LFE
	ZR74CS	Double ring wrench for removing the filter bowl		
			1/2" + 1 1/4"	ZR74CS
	ZR10K	Double ring wrench for removing the filter bowl		
			1 1/2" + 2"	ZR10K-11/2
	Z74S-AN for 1/2" - 1 1/4"	Automatic reverse rinsing actuator For automatic filter cleaning at presettable intervals		
				Z74S-AN
	Z11S for 1 1/2" - 2"	Automatic reverse rinsing actuator For automatic filter cleaning at presettable intervals		
		230 V, 50/60 Hz, 10 with moulded Schuko electrical plug		Z11S-A
		24 V, 50/60 Hz, 10 without electrical plug		Z11S-B
		230 V, 50/60 Hz, 10 with moulded Type 12 electrical plug for Switzerland		Z11S-Z

Spare Parts

Filter combinations FK74CS / FKN74CS from 2010 onwards

Overview

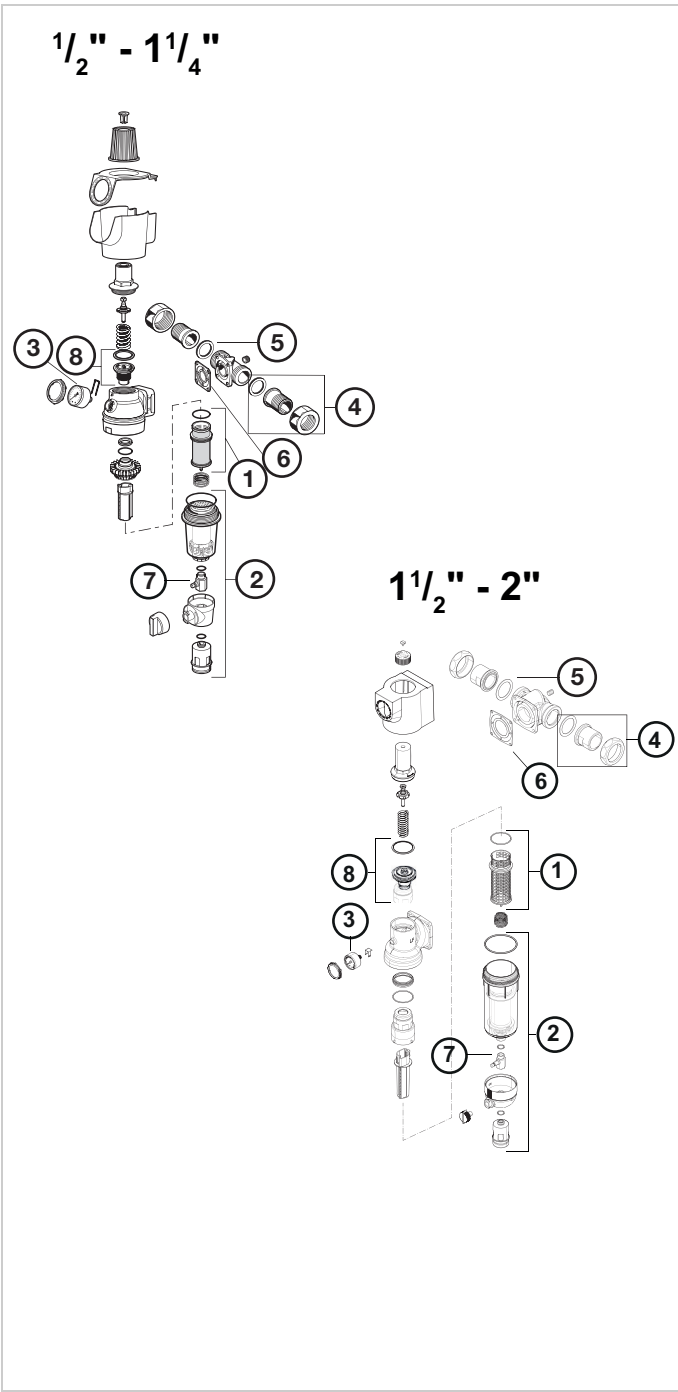

	Description	Dimension	Item No.
1	Filter insert complete		
	50 µm	1/2" - 1 1/4"	AF74-1C
	100 µm	1/2" - 1 1/4"	AF74-1A
	200 µm	1/2" - 1 1/4"	AF74-1D
	20 µm	1 1/2" - 2"	AF11S-11/2B
	50 µm	1 1/2" - 2"	AF11S-11/2C
	100µm	1 1/2" - 2"	AF11S-11/2A
	200 µm	1 1/2" - 2"	AF11S-11/2D
2	Clear filter bowl		
		1/2" - 1 1/4"	KF74CS-1A
	lead-free	1/2" - 1 1/4"	KF11SB-1A
	lead-free	1 1/2" - 2"	KF11SB-2A
3	Pressure gauge rear connection thread G1/4"		
		0 - 16 bar	M74CS-A16
4	Connection set threaded connection		
		1/2"	VST06-1/2AR
		3/4"	VST06-3/4A
		1"	VST06-1A
		1 1/4"	VST06-11/4A
	lead-free	1/2"	VST74CS-1/2LFA
	lead-free	3/4"	VST06-3/4LFA
	lead-free	1"	VST06-1LFA
	lead-free	1 1/4"	VST06-11/4LFA
	lead-free	1 1/2"	VST74CS-11/2LFA
	lead-free	2"	VST06-2LFA
5	Union seal washer (10 pcs.)		
		3/4"	0901444
		1"	0901445
		1 1/4"	0901446
		1 1/2"	0901447
		2"	0901448
6	Flange seal		
		3/4" - 1 1/4"	5975900
		1 1/2" - 2"	5975901
7	Ball valve complete		
	lead-free		KH11S-1LFA
8	Valve insert complete		
		1/2" - 1 1/4"	D06FA-1B
	lead-free	1/2" - 1 1/4"	D06FA-1LF
	lead-free	2"	D06FA-11/2LF

resideo

Ademco 1 GmbH, Hardhofweg 40,
74821 MOSBACH, GERMANY
Phone: +49 6261 810

Manufactured for and on behalf of
Pittway Sàrl, Z.A., La Pièce 6,
1180 Rolle, Switzerland

Subject to change. EN0H-1187GE23 R0223
© 2023 Resideo Technologies, Inc.
All rights reserved.

For more information
resideo.com

This document contains proprietary information of Pittway Sàrl and its affiliated companies and is protected by copyright and other international laws. Reproduction or improper use without specific written authorization of Pittway Sàrl is strictly forbidden.