


Braukmann

V5003F, Kombi-VX



SW21
SW25
SW30
SW60









H₂O

-20 - 120°C (-4 - 248°F)


Max. 25bar (363psi)

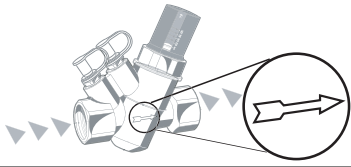




			Δp [mbar]		V [l/h]	
	DN		min.	max.	min.	max.
V5003FY10150412	15		170	2100	100	412
V5003FY10150609	15		170	2100	157	609
V5003FY10150825	15		170	2000	276	825
V5003FY20150615	15		350	4000	138	615
V5003FY20150896	15		350	4000	238	896
V5003FY20151270	15		300	4000	406	1270
V5003FY10200412	20		170	2100	100	412
V5003FY10200609	20		170	2100	157	609
V5003FY10200825	20		170	2000	276	825
V5003FY20200615	20		350	4000	138	615
V5003FY20200896	20		350	4000	238	896
V5003FY20201270	20		300	4000	406	1270
V5003FY10250412	25		170	2100	100	412
V5003FY10250609	25		170	2100	157	609
V5003FY10250825	25		170	2000	276	825
V5003FY20250615	25		350	4000	138	615
V5003FY20250896	25		350	4000	238	896
V5003FY20251270	25		300	4000	406	1270
V5003FY10265020	25 (LI)		170	4000	535	5830
V5003FY10325020	32		170	4000	535	5830
V5003FY10401610	40		200	4000	3180	16100
V5003FY10501610	50		200	4000	3180	16100

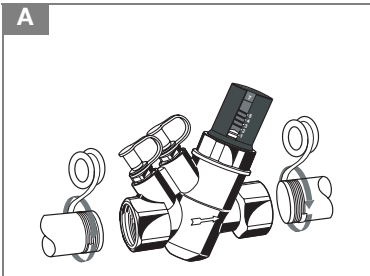

A

B


DN15...32 SW30
DN40...50 SW60

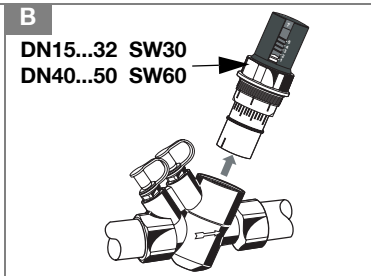


C

DN15...20 SW21
DN25...32 SW25
DN40...50 SW60


VA5003ZA003
VA5003ZA004
VA5003ZA005

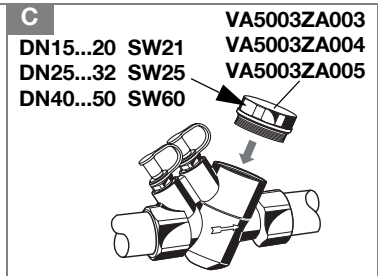

D

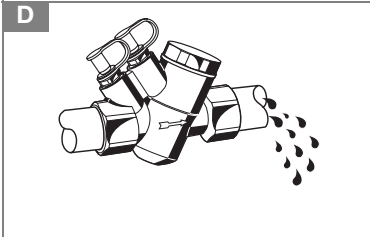


E

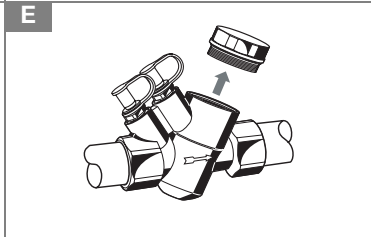

F


DN15...32 15Nm
DN40...50 30Nm

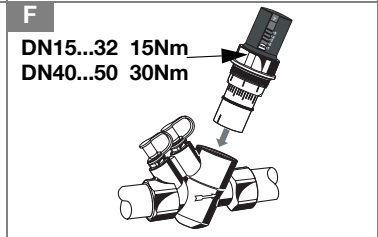


G

VA5003ZA001


n=1.0...5.0 ⇒ Tab. 1

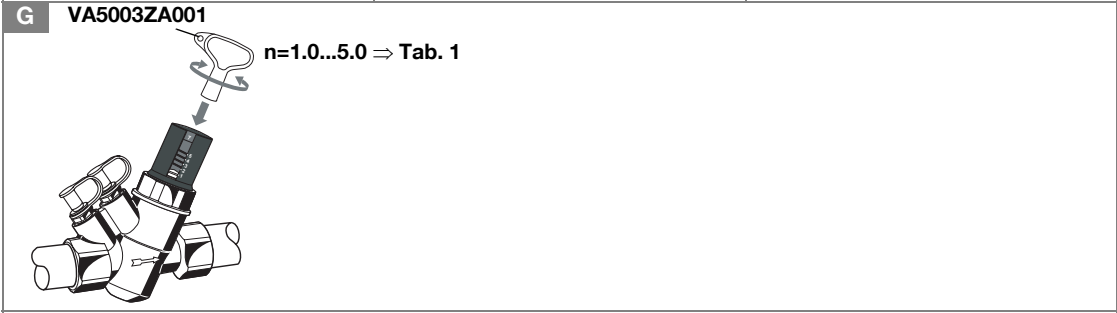

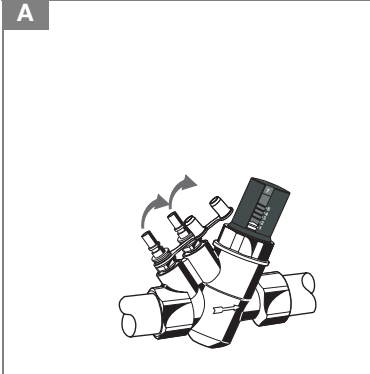


A

B

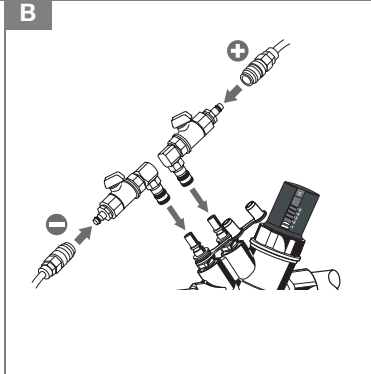


C


VM241A1002

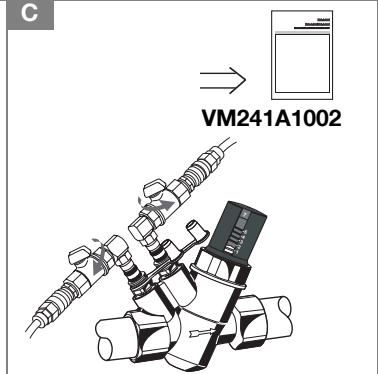


D

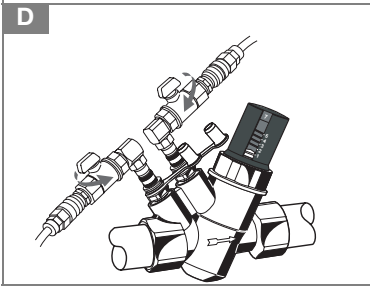

E

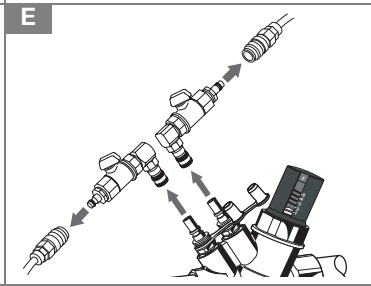

F

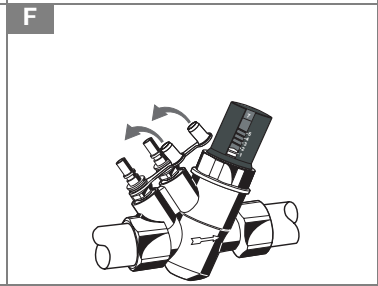

Tab. 1

V5003FY10..						V5003FY20..			
	V5003FY10..- 0412	V5003FY10..- 0609	V5003FY10..- 0825	V5003FY10..- 5020	V5003FY10..- 16100		V5003FY20..- 0615	V5003FY20..- 0896	V5003FY20..- 1270
Δp [mbar]	170...2100	170...2100	170...2000	170...4000	200...4000	Δp (mbar)	350...4000	350...4000	300...4000
n	[l/hr]	[l/hr]	[l/hr]	[l/hr]	[l/hr]	n	[l/hr]	[l/hr]	[l/hr]
1.0	100	157	276	535	3180	1.0	138	238	406
1.1	108	168	293	793	4100	1.1	150	254	427
1.2	116	180	310	1040	4940	1.2	162	271	449
1.3	123	191	326	1280	5710	1.3	174	287	470
1.4	131	202	343	1510	6420	1.4	186	304	492
1.5	139	214	360	1730	7070	1.5	198	320	513
1.6	147	225	377	1940	7660	1.6	210	336	535
1.7	155	236	393	2140	8200	1.7	221	353	556
1.8	162	247	410	2330	8700	1.8	233	369	578
1.9	170	259	426	2520	9150	1.9	245	386	599
2.0	178	270	443	2690	9570	2.0	257	402	621
2.1	186	281	459	2860	9960	2.1	269	419	642
2.2	194	293	475	3030	10300	2.2	281	435	664
2.3	201	304	491	3180	10600	2.3	293	452	685
2.4	209	315	507	3330	10900	2.4	305	468	707
2.5	217	327	523	3470	11200	2.5	317	485	728
2.6	225	338	539	3610	11500	2.6	329	501	750
2.7	233	349	554	3740	11700	2.7	341	517	771
2.8	240	360	569	3870	12000	2.8	353	534	793
2.9	248	372	584	3990	12200	2.9	365	550	814
3.0	256	383	599	4100	12400	3.0	377	567	836
3.1	264	394	614	4220	12600	3.1	388	583	857
3.2	272	406	628	4320	12800	3.2	400	600	879
3.3	279	417	642	4420	13000	3.3	412	616	900
3.4	287	428	655	4520	13200	3.4	424	633	922
3.5	295	440	669	4620	13400	3.5	436	649	943
3.6	303	451	682	4710	13600	3.6	448	666	965
3.7	311	462	695	4800	13800	3.7	460	682	987
3.8	318	473	707	4890	14000	3.8	472	699	1010
3.9	326	485	719	4970	14200	3.9	484	715	1030
4.0	334	496	731	5050	14400	4.0	496	731	1050
4.1	342	507	742	5130	14600	4.1	508	748	1070
4.2	350	519	753	5210	14800	4.2	520	764	1090
4.3	357	530	764	5290	14900	4.3	532	781	1120
4.4	365	541	774	5370	15100	4.4	544	797	1140
4.5	373	553	784	5440	15300	4.5	556	814	1160
4.6	381	564	793	5520	15500	4.6	567	830	1180
4.7	389	575	802	5600	15700	4.7	579	847	1200
4.8	396	586	810	5670	15800	4.8	591	863	1220
4.9	404	598	818	5750	16000	4.9	603	880	1240
5.0	412	609	825	5830	16100	5.0	615	896	1270



 VA5003ZA001	 VA3600C001	 VA5003ZA003 VA5003ZA004 VA5003ZA005
---	--	---



Manufactured for
and on behalf of

Pittway Sàrl, Z.A., La Pièce 4,
1180 Rolle, Switzerland

by its authorised representative
Ademco 1 GmbH

For more information
homecomfort.resideo.com/europe

Ademco 1 GmbH, Hardhofweg 40,
74821 MOSBACH, GERMANY

Phone: +49 6261 810
Fax: +49 6261 81309