

Mounting Brackets [Refer to *Dimensions* on page 5.]

Model	Fitting materials	Count	Accessories			Applicable sensor (mounting pitch on sensor side)	Page Dimensions
			Description	Material	Count		
E39-L31	Iron, zinc plating	1	Slotted/Phillips screws M3 × 12 (with spring washers)	Iron, zinc plating	2	E3C-S50 (8)	5
E39-L40	Iron, zinc plating	1	Phillips screws M4 × 25 (with spring and plain washers)	Iron, zinc plating	2	E3JK	
			Nuts M4	Iron, zinc plating	2		
E39-L41	Iron, zinc plating	2	Phillips screws M3 × 14 (with spring washers)	Iron, zinc plating	4	E3C-1 (10)	
			Plain washer M3	Iron, zinc plating	4		
E39-L42	Iron, black coating	2	Phillips screws M3 × 10 (with spring washers)	Iron, zinc plating	4	E3C-2 (20) E3C-DS10 (19) E3C-VS1G (19) E3C-VS3R (19)	6
E39-L43	Stainless steel (SUS304)	1	Slotted/Phillips screws M3 × 8 (with spring and plain washers)	Stainless steel (SUS304)	2	E3Z pre-wired model (25.4)	
			Slotted/Phillips screws M3 × 8 (with spring and plain washers)	Stainless steel (SUS304)	2	E3Z pre-wired model (25.4)	
E39-L51	Iron, zinc plating	1	Slotted/Phillips screws M4 × 30 (with spring and plain washers)	Iron, zinc plating	2	E3JM (40)	
			Nuts M4	Iron, nickel plating	2		
E39-L53	Iron, zinc plating	1	---	---	---	E3JM (40)	7
E39-L54V	Stainless steel (SUS304)	1	---	---	---	E32-T54V	
E39-L83	Stainless steel	1	---	---	---	E32-T24S E32-A03	
E39-L85	Stainless steel (SUS304)	1	Hexagonal bolts M4 × 12 (with spring and plain washers)	Iron, zinc plating	2	E3S-C (25.4)	
E39-L86	Stainless steel (SUS304)	1	Hexagonal bolts M4 × 12 (with spring and plain washers)	Iron, zinc plating	2	E3S-C (25.4)	
E39-L87	Stainless steel (SUS304)	1	Hexagonal bolts M4 × 12 (with spring and plain washers)	Iron, zinc plating	2	E3S-C (25.4)	

Note: Applicable models that appear shaded come with the Mounting Brackets at left as accessories.

Промэлектроника
sales@prom-elec.com

Model	Fitting materials	Count	Accessories			Applicable sensor (mounting pitch on sensor side)	Page Dimensions
			Description	Material	Count		
E39-L93FH	Stainless steel (SUS304)	1	Holder (upper)	Heat-resistant ABS resin	1	E3Z (25.4) E39-R1/E39-R3	8
E39-L93FV	Stainless steel (SUS304)	1	Holder (lower)	66 nylon	1		
			Pipe	Stainless steel (SUS304)	1		
E39-L93H	Stainless steel (SUS304)	1	Bolts M4 × 12 with Hexagonal holes	Iron, nickel plating	2		
			Bolts M4 × 30 with hexagonal holes	Iron, nickel plating	1		
E39-L93V	Stainless steel (SUS304)	1	Phillips screws M3 × 12 (with spring and plain washers)	Stainless steel (SUS304)	2	E3Z (25.4) E39-R1/E39-R3	9
			Spring washer M4	Iron, nickel plating	1		
			Plain washer M4	Iron, nickel plating	1		
E39-L93XY	---	---	Nuts M4	Iron, nickel plating	3		
			Holder	66 nylon	1		
E39-L94	Iron, zinc plating	2	Pipe	Stainless steel (SUS304)	1	E3Z (25.4) E39-R1/E39-R3	9
E39-L96	---	---	Bolts M5 × 16 with hexagonal holes	Stainless steel (SUS304)	2		
E39-L98	---	---	Nuts M5	Stainless steel (SUS304)	2	E3Z (25.4) E39-R1/E39-R3	9
E39-L96	Stainless steel (SUS304)	1	Phillips screws M3 × 10	Iron, zinc plating	4		
E39-L98	Stainless steel (SUS304)	1	Nuts M3	Iron, zinc plating	4	E32-T16P (19) E32-T16PR (19)	9
E39-L96	Stainless steel (SUS304)	1	Phillips screws M3 × 6 (with spring and plain washers)	Iron, nickel plating	2		
E39-L98	Stainless steel (SUS304)	1	Slotting/Phillips screws M3 × 12 (with spring and plain washers)	Stainless steel (SUS304)	2	E3Z pre-wired model (25.4)	10
E39-L102	Stainless steel (SUS304)	1	Hexagonal bolts M4 × 12 (with spring and plain washers)	Iron, zinc plating	2		
E39-L103	Stainless steel (SUS304)	1	Hexagonal bolts M4 × 12 (with spring and plain washers)	Iron, zinc plating	2	E3S-C (horizontal type) (25.4)	10
E39-L104	Stainless steel (SUS304)	1	Slotting/Phillips screws M3 × 8 (with spring and plain washers)	Stainless steel (SUS304)	2		
E39-L116	Stainless steel (SUS304)	1	Nut plate	Stainless steel (SUS304)	1	E3Z pre-wired model (25.4) E32-R21 (for installation of E39-R3) (25.4)	10
E39-L117	Stainless steel (SUS304)	1	Nut plate	Stainless steel (SUS304)	1		
E39-L118	Stainless steel (SUS304)	1	Nut plate	Stainless steel (SUS304)	1	E3T-S (9/15)	11
E39-L119	Stainless steel (SUS304)	1	---	---	---		
E39-L120	Stainless steel (SUS304)	1	---	---	---	E3T-F (8)	11
E39-L127-T1	Iron, zinc plating	1	Phillips screws M2.3 × 8	Iron, zinc plating	4		
E39-L127-T2	Iron, zinc plating	1	Spring washer M2.3	Iron, zinc plating	4	E3C-S10 (7.5)	11
E39-L127-T3	Iron, zinc plating	1	Phillips screws M2.3 × 8	Iron, zinc plating	4		
E39-L127-T2	Iron, zinc plating	1	Spring washer M2.3	Iron, zinc plating	4	E3C-S10 (7.5)	11
E39-L127-T3	Iron, zinc plating	1	Phillips screws M2.3 × 8	Iron, zinc plating	4		
E39-L127-T2	Iron, zinc plating	1	Spring washer M2.3	Iron, zinc plating	4	E3C-S10 (7.5)	11
E39-L127-T3	Iron, zinc plating	1	Phillips screws M2.3 × 8	Iron, zinc plating	4		

Note: Applicable models that appear shaded come with the Mounting Brackets at left as accessories.

Model	Fitting materials	Count	Accessories			Applicable sensor (mounting pitch on sensor side)	Page Dimensions
			Description	Material	Count		
E39-L131	Stainless steel (SUS304)	1	Slotted/Phillips screws M4 × 25 Spring washer M4 Plain washer M4 Nuts M4	Stainless steel (SUS304) Stainless steel (SUS304) Stainless steel (SUS304) Stainless steel (SUS304)	2 2 2 2	E3G-R1□ (25) E3G-L7□ (25)	12
E39-L132	Stainless steel (SUS304)	1	Slotted/Phillips screws M4 × 25 Spring washer M4 Plain washer M4 Nuts M4	Stainless steel (SUS304) Stainless steel (SUS304) Stainless steel (SUS304) Stainless steel (SUS304)	2 2 2 2	E3G-R1□ (25) E3G-L7□ (25)	
E39-L135	Stainless steel (SUS304)	1	Slotted/Phillips screws M4 × 35 Spring washer M4 Plain washer M4 Nuts M4	Stainless steel (SUS304) Stainless steel (SUS304) Stainless steel (SUS304) Stainless steel (SUS304)	2 2 2 2	E3G-MR19 (T) E3G-ML79 (T)	
E39-L136	Stainless steel (SUS304)	1	Slotted/Phillips screws M4 × 35 Spring washer M4 Plain washer M4 Nuts M4	Stainless steel (SUS304) Stainless steel (SUS304) Stainless steel (SUS304) Stainless steel (SUS304)	2 2 2 2	E3G-MR19 (T) E3G-ML79 (T)	
E39-L142	Stainless steel (SUS304)	1	Slotted/Phillips screws M3 × 8 (with spring and plain washers)	Stainless steel (SUS304)	2	E3Z pre-wired model (25.4)	
E39-L143	Stainless steel (SUS304)	1	None	---	---	E3X-DA-S/MDA E3X-NA E3C-LDA E2C-EDA E4C-UDA	13
E39-L144	Stainless steel (SUS304)	1	Slotted/Phillips screws M3 × 12 (with spring and plain washers)	Stainless steel (SUS304)	2	E3Z pre-wired model (25.4)	
E39-L148	Stainless steel (SUS304)	1	None	---	---	E3X-NA	
E39-L149	Iron, black coating	1	None	---	---	E3Z-G	
E39-L150	Stainless steel (SUS304)	1	Holder/bracket Shaft (brace) Bolt with hexagonal hole Nut Phillips screw Slotted/Phillips screws	PBT (polybutylene terephthalate) Stainless steel (SUS304) Stainless steel (SUSXM7) Stainless steel (SUS304) Stainless steel (SUSXM7) Stainless steel (SUS304)	1 1 1 1 1 2	E3Z (25.4) E3S-R6□/R8□ (20) E39-R3	14
E39-L151	Stainless steel (SUS304)	1	Holder/bracket Shaft (brace) Bolt with hexagonal hole Nut Phillips screw Slotted/Phillips screws	PBT (polybutylene terephthalate) Stainless steel (SUS304) Stainless steel (SUSXM7) Stainless steel (SUS304) Stainless steel (SUSXM7) Stainless steel (SUS304)	1 1 1 1 1 2	E3Z (25.4) E3S-R6□/R8□ (20) E39-R3	
E39-L153	Stainless steel (SUS304)	1	Slotted/Phillips screws M3 × 8 (with spring and plain washers)	Stainless steel (SUSXM7) Stainless steel (SUS304)	2	E3Z pre-wired model (25.4)	
E39-L166	Stainless steel (SUS304)	1	Nut plate	Stainless steel (SUS304)	1	E3T-S□□M (13/16)	
E39-L167	Stainless steel (SUS304)	1	---	---	---	E3T-FD□□M (8)	15
E39-L168	PBT (polybutylene terephthalate)	1	---	---	---	E3T-FD□□M	
E39-L180	Stainless steel (SUS304)	1	Phillips screw Nut plate	Stainless steel	2 1	ZX1-LD50□ ZX1-LD100□	
E39-L181	Stainless steel (SUS304)	1	Phillips screw Nut plate	Stainless steel	2 1	ZX1-LD300□ ZX1-LD600□	

Note: Applicable models that appear shaded come with the Mounting Brackets at left as accessories.

Slits

Model	Slit width	Installation procedure	Applicable type
E39-S39	Width 1 × 20 mm	Seal type	E3JM-10□4 (T)-N E3JK-5□□-N
E39-S61	Width 0.5, 1, 2, 4 × 11 mm	Plug-in type	E3S-CT□1
E39-S63	0.5-mm dia., 1 mm		E3T-ST1□
E39-S64	0.5-mm dia., 1 mm		E3T-FT1□
E39-S65A	0.5 mm dia.		E3Z-T□□
E39-S65B	1-mm dia.		
E39-S65C	2-mm dia.		
E39-S65D	Width 0.5 × 10 mm		
E39-S65E	Width 1 × 10 mm		
E39-S65F	Width 2 × 10 mm		
E39-S68	Width 0.5, 1 × 13.4 mm	Seal type	E32-T16P E32-T16PR
E39-S76A	0.5-mm dia.	Plug-in type	E3T-ST□M
E39-S76B	1-mm dia.		

Note: Applicable models that appear shaded come with the Slits at left as accessories

Reflectors (Refer to Dimensions on page 16.)

Name	Reflectors		Non-fogging reflective plate	Reflectors			Special Reflec- tor for E3ZM-B	
Item	Model	E39-R1	E39-R1S	E39-R1K	E39-R2	E39-R6	E39-R10	E39-RP1
Directional angle	30° min. *1			30° min. *2		30° min.		
Ambient operating temperature range	-25 to 55°C							-40 to 60°C
Ambient storage temperature range	-40 to 70°C			-40 to 55°C		-40 to 70°C		
Ambient operating humidity range	35% to 85%					35% to 95%		35% to 85%
Ambient storage humidity range	35% to 95%							
Degree of protection	IEC IP67							
Accessories	---							

*1. 40° or higher for E3JM-R and E3JK-R.

*2. 40° or higher for E3G-R.


Name	Small reflector				Tape reflector *			
Item	Model	E39-R9	E39-R3	E39-R4	E39-R37-CA *	E39-RS1 E39-RS1-CA	E39-RS2 E39-RS2-CA	E39-RS3 E39-RS3-CA
Directional angle	30° min.							
Ambient operating temperature range	−25 to 55°C							
Ambient storage temperature range	−40 to 70°C				0 to 40°C			
Ambient operating humidity range	35% to 95%	35% to 85%						
Ambient storage humidity range	35% to 95%				35% to 85%			
Degree of protection	IEC IP67							
Accessories	---	Mounting Brackets E39-L104 (with screws)	---	Phillips screws M3 × 3, spring washers M3, nuts M3	---			

* Models ending in the suffix "-CA" are reflectors only for E3T-SR4□.


Item	Name Model	Laser Reflectors			
		Standard		Short-distance transpar- ent object detection	Sheets
		E39-R12	E39-R13	E39-R14	E39-RS4 E39-RS5
Ambient operating temperature range		-10 to 55°C (No icing)			
Ambient storage temperature range		-25 to 70°C (No icing)			
Ambient operating humidity range		35 to 85% (No condensation)			
Ambient storage humidity range		35 to 85% (No condensation)			

Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.


Material: Iron

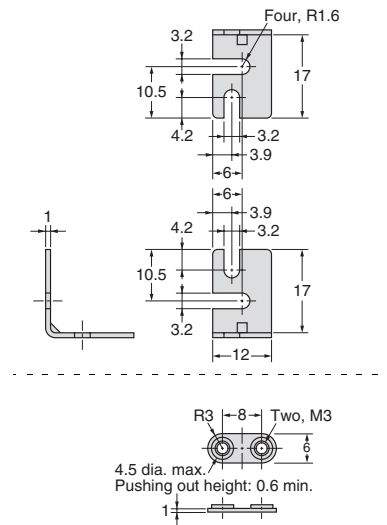


Material: Iron

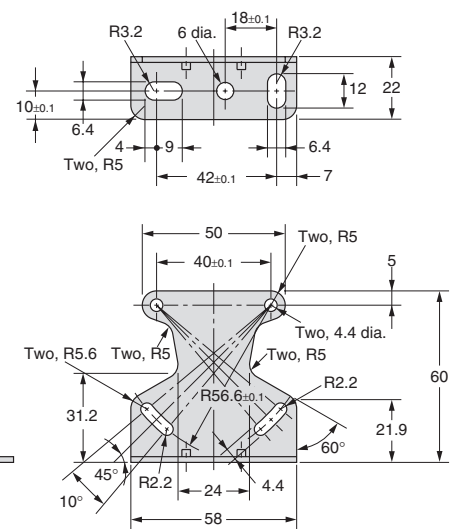


Material: Iron

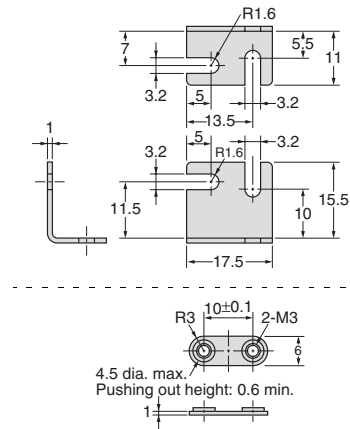


Material: Iron

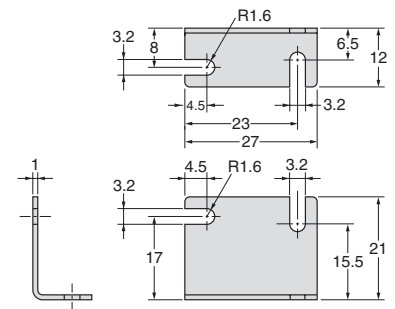


E39-L43

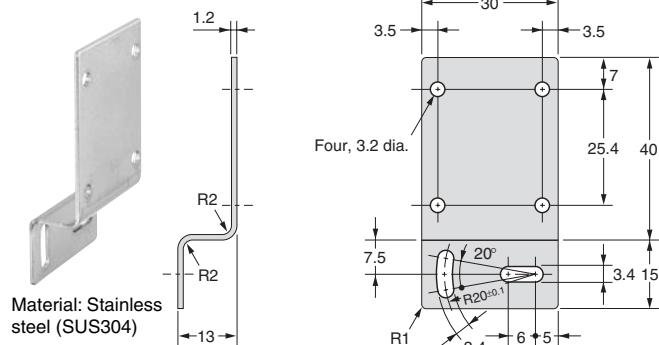


E39-L44

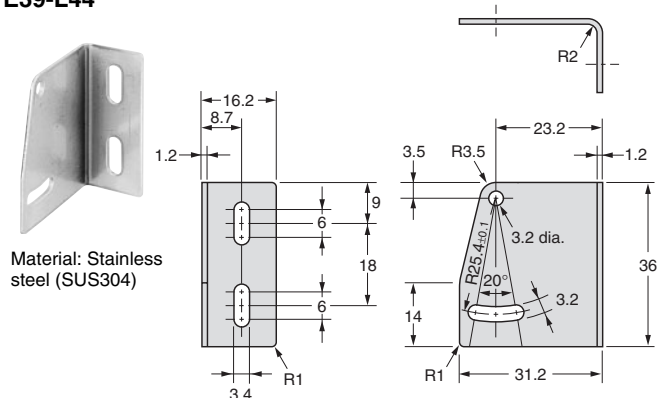


E39-L51

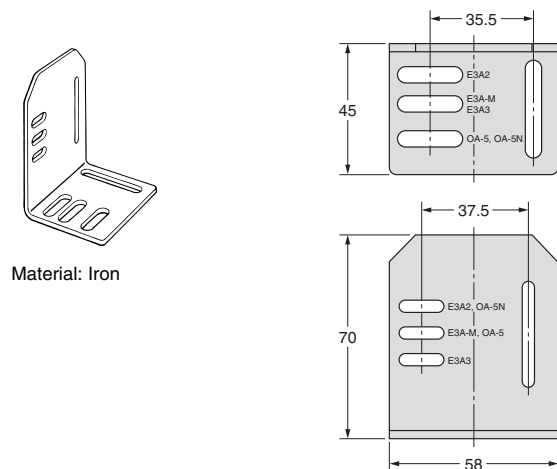


E39-L53

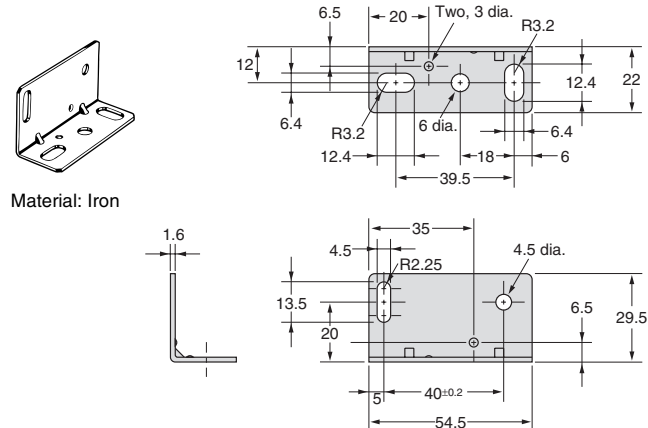

E39-L54V

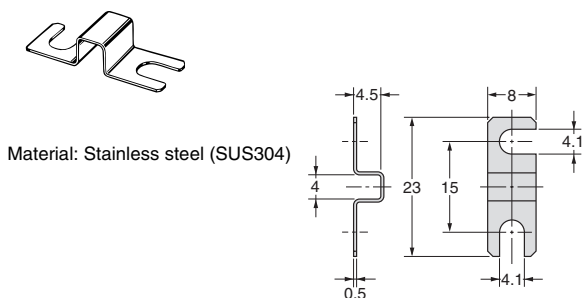


E39-L83

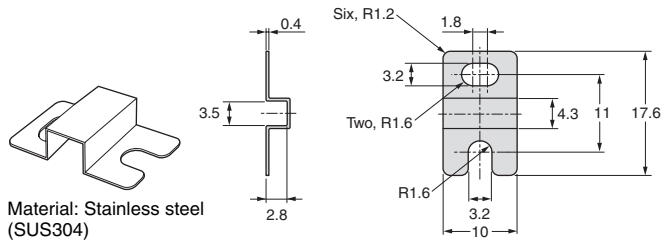


Material: Stainless steel
(SUS304)


E39-L85

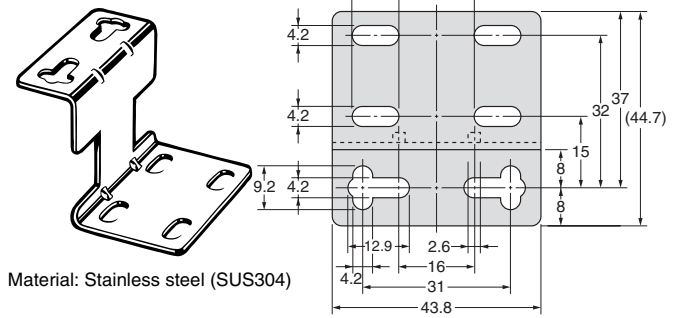


Material: Stainless steel (SUS304)

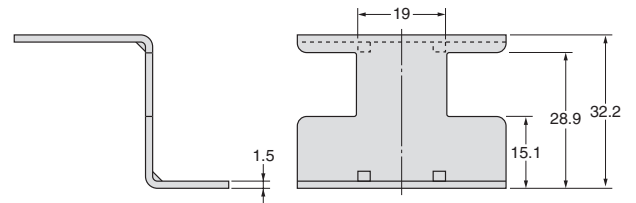


E39-L86




Material: Stainless steel (SUS304)

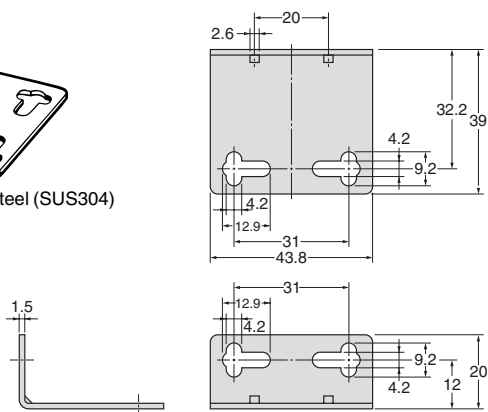


E39-L87




Material:
Stainless steel (SUS304)

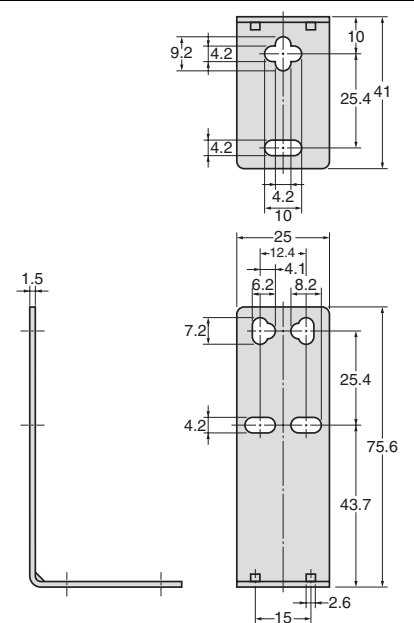


E39-L93FH

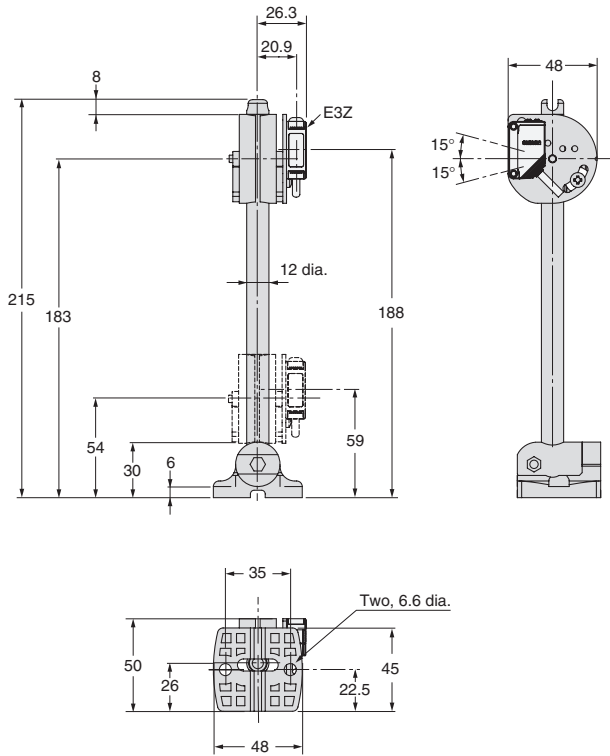


E39-L93FV

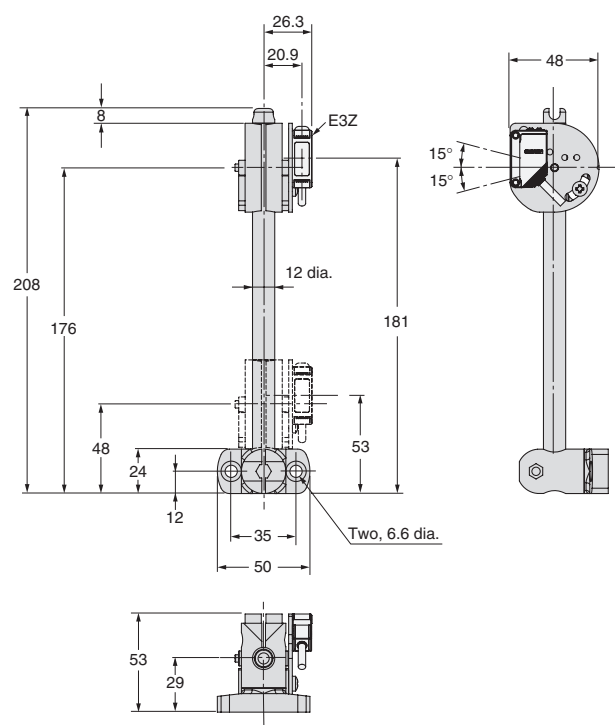


E39-L93H

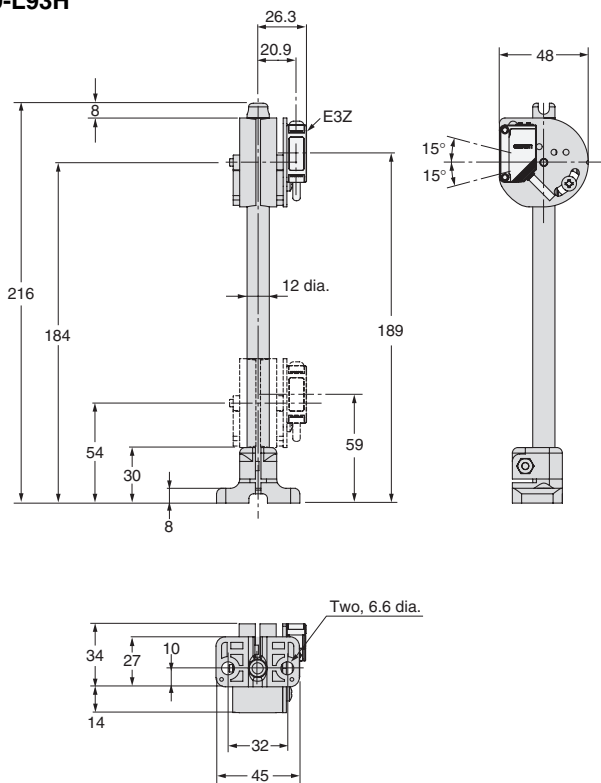

E39-L93V

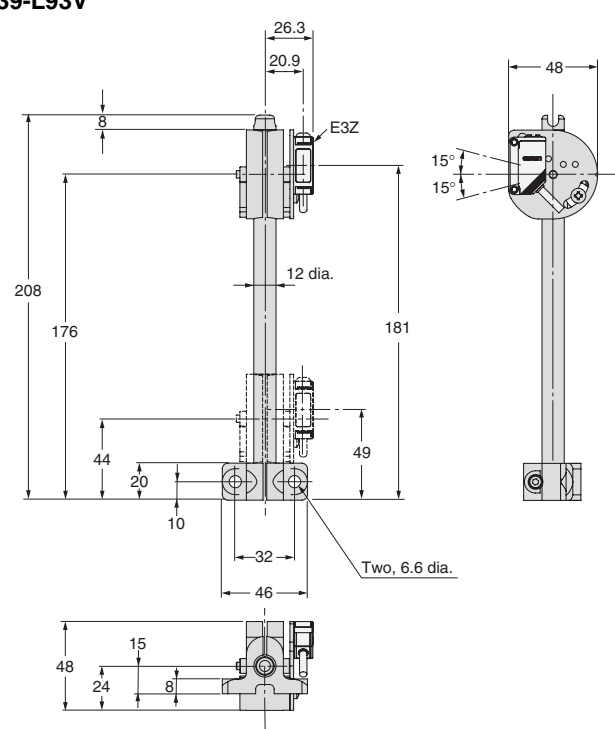


E39-L93XY

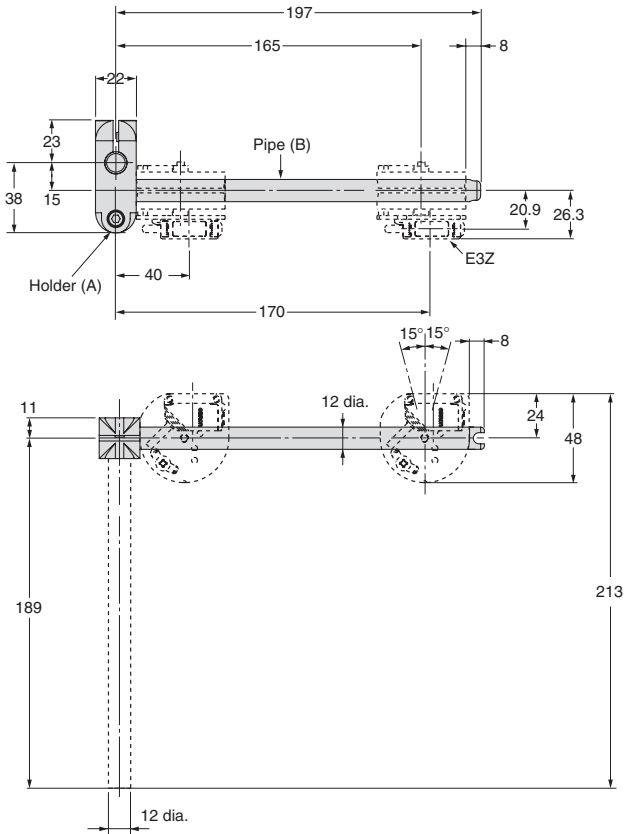


Note: The E39-L93XY consists of only the one joint holder (A) and pipe, and the two hexagonal bolts and nuts. It cannot be mounted to the Sensor alone.


E39-L94




Material: Iron

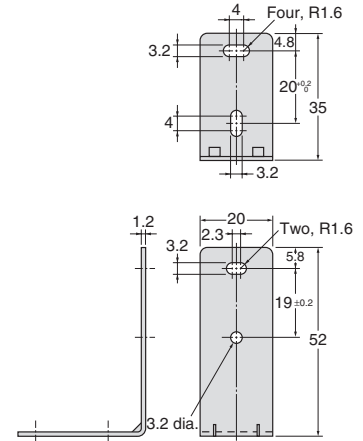

E39-L96




Material:
Stainless steel
(SUS304)
2-mm-thick

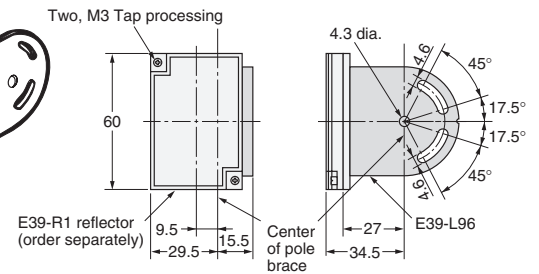


E39-L98

Mounting Holes

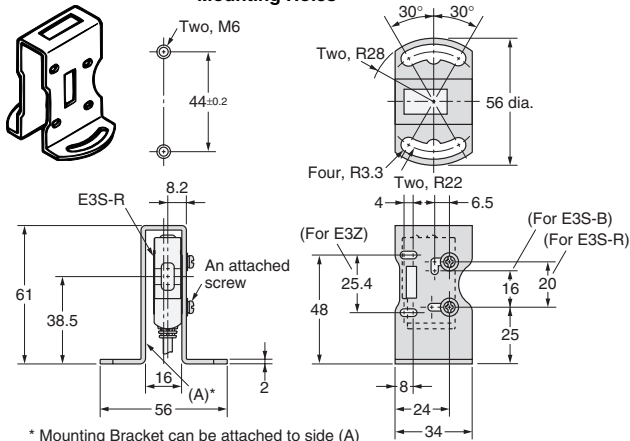


* Mounting Bracket can be attached to side (A)
Material: Stainless steel (SUS304)


E39-L102




Material:
Stainless steel (SUS304)

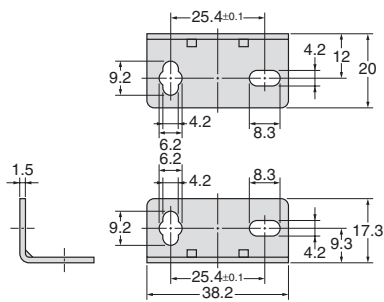

E39-L103




Material:
Stainless steel (SUS304)

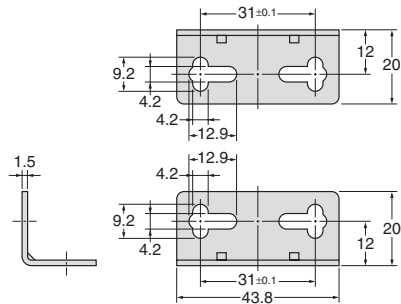


E39-L104




Material:
Stainless steel
(SUS304)

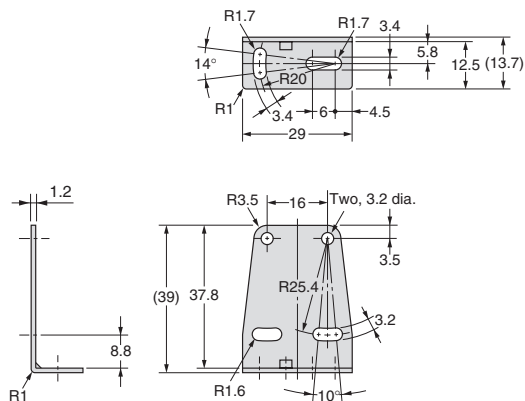


E39-L116

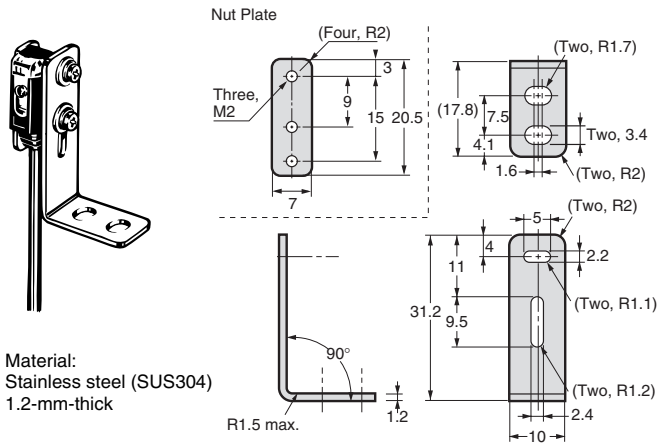


E39-L117

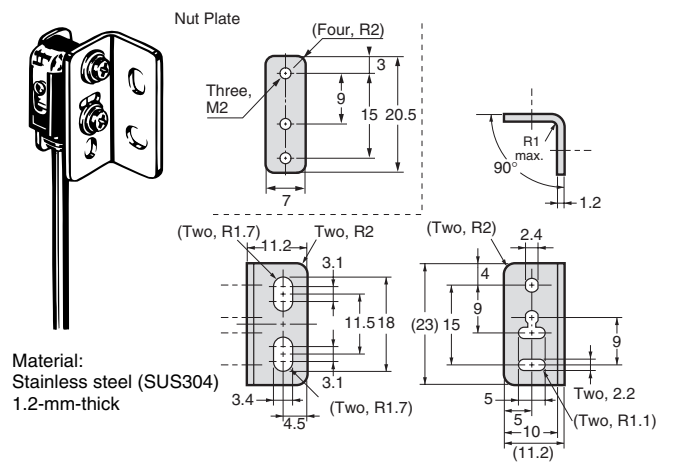


E39-L118

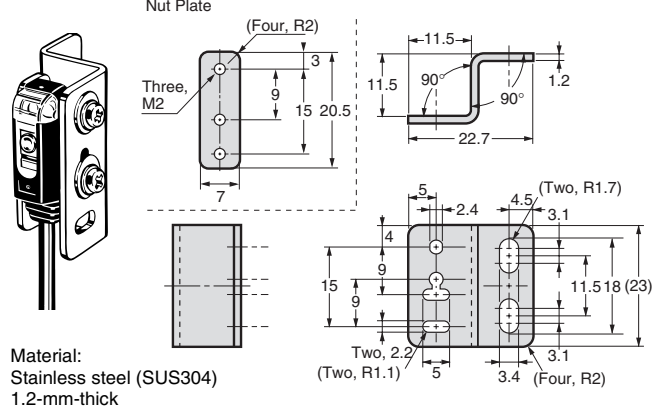


E39-L119

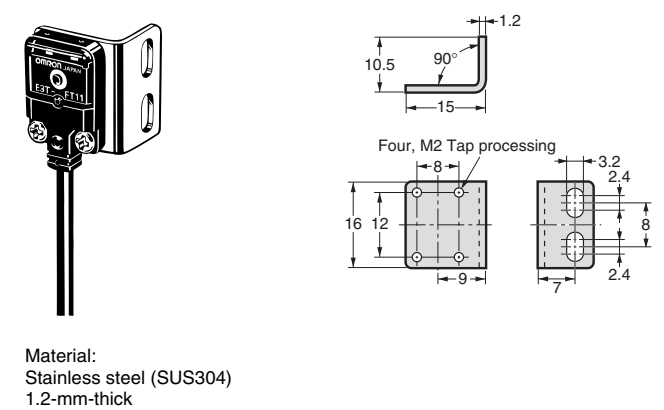

E39-L120

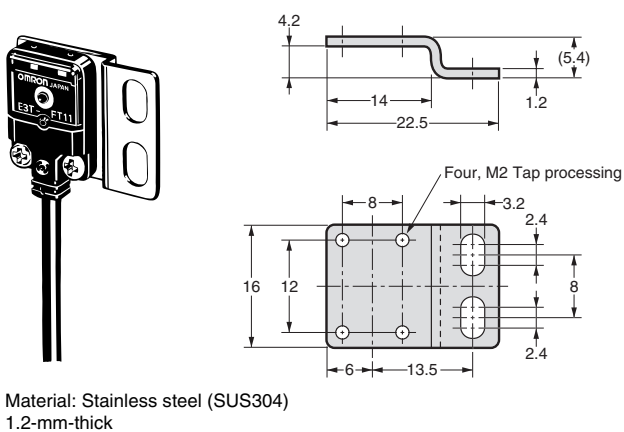


E39-L127-T1 E39-L127-T2 E39-L127-T3

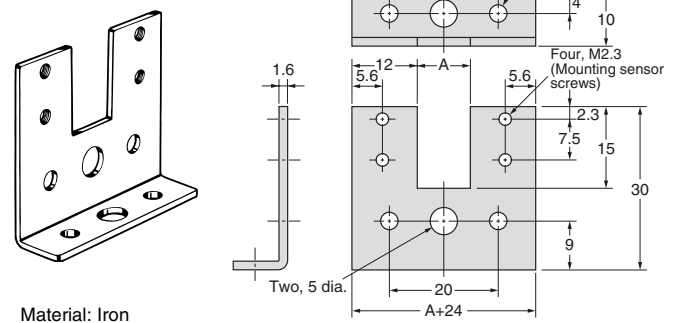


Model	Dimension A (mm)
E39-L127-T1	10
E39-L127-T2	20
E39-L127-T3	30


E39-L131




Material:
Stainless steel (SUS304)

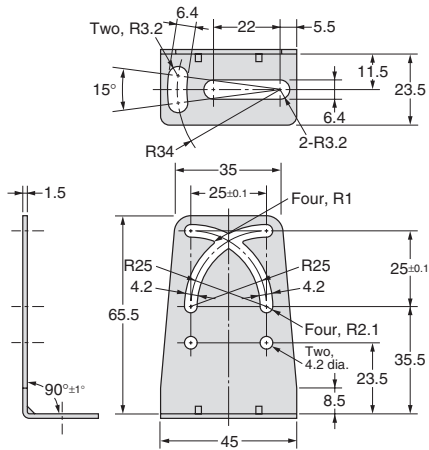


E39-L132




Material: Stainless steel (SUS304)

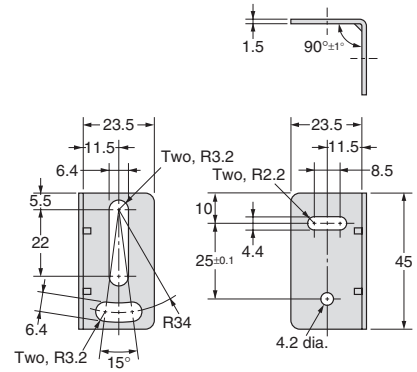


E39-L135

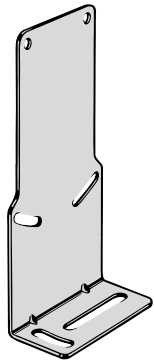


Material:
Stainless steel (SUS304)

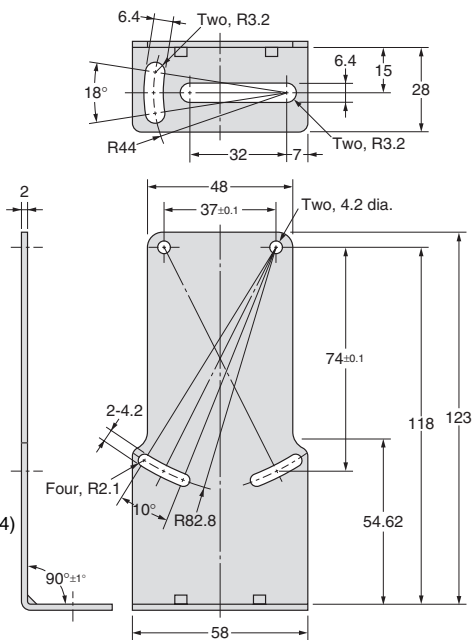

E39-L136




Material: Stainless steel (SUS304)

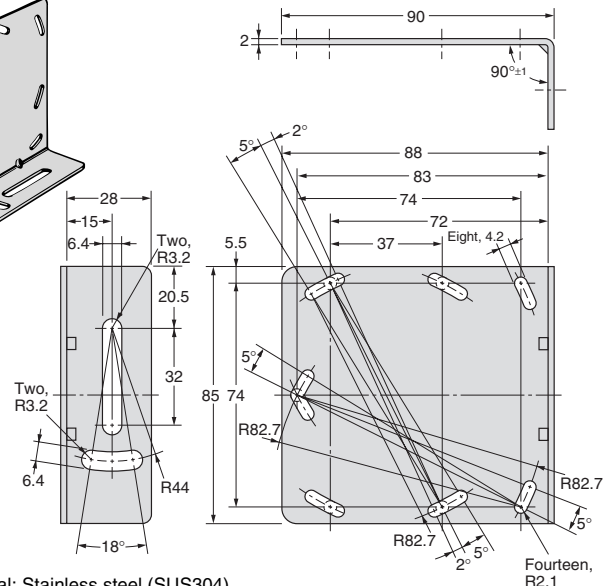


E39-L142




Material: Stainless steel (SUS304)

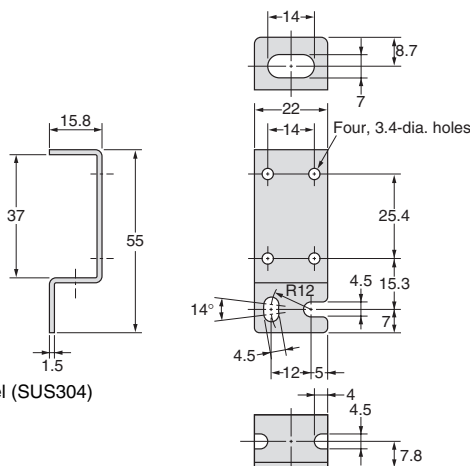


E39-L143



Material: Stainless steel (SUS304)

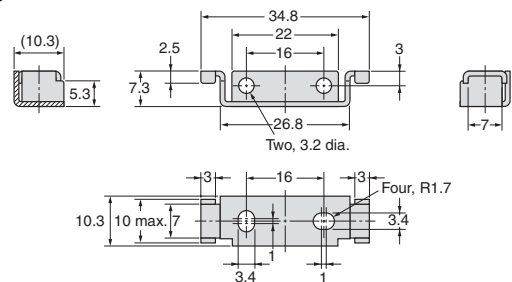


E39-L144

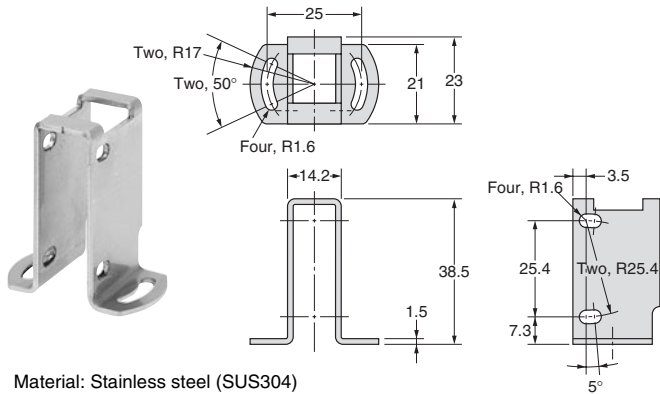


Material: Stainless steel (SUS304)

E39-L148

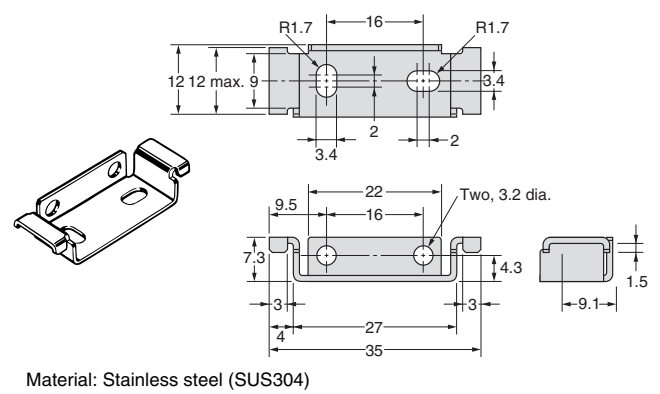

Material: Stainless steel (SUS304)


E39-L149

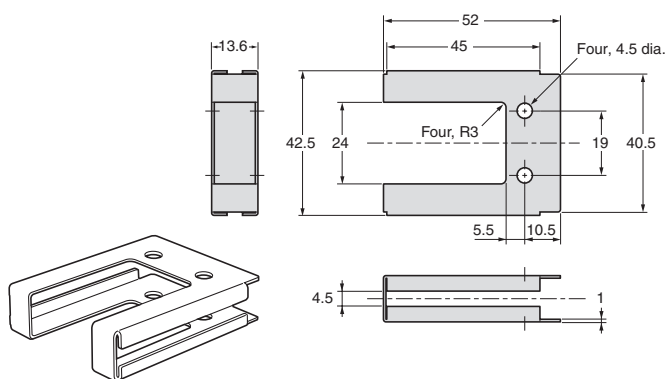

Material: Iron

E39-L150


E39-L151

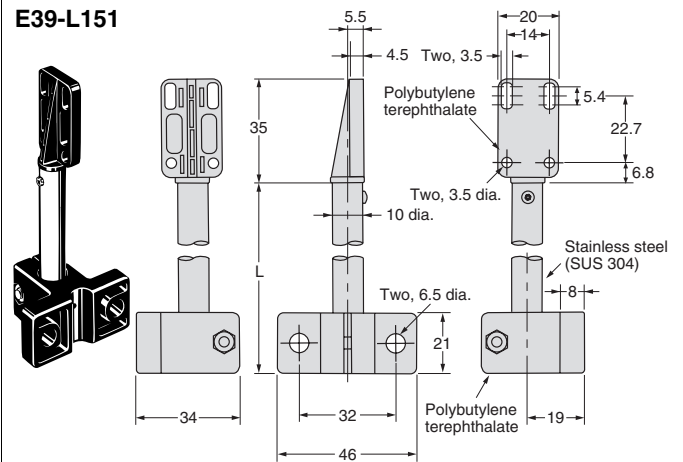

Length (mm)

Model	L
E39-L150	65
E39-L151	165

E39-L153

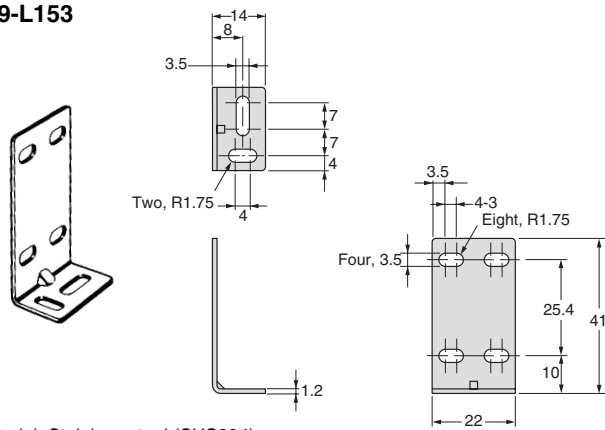


Material: Stainless steel (SUS304)

E39-L166




Material: Stainless steel (SUS304)
1.2-mm-thick

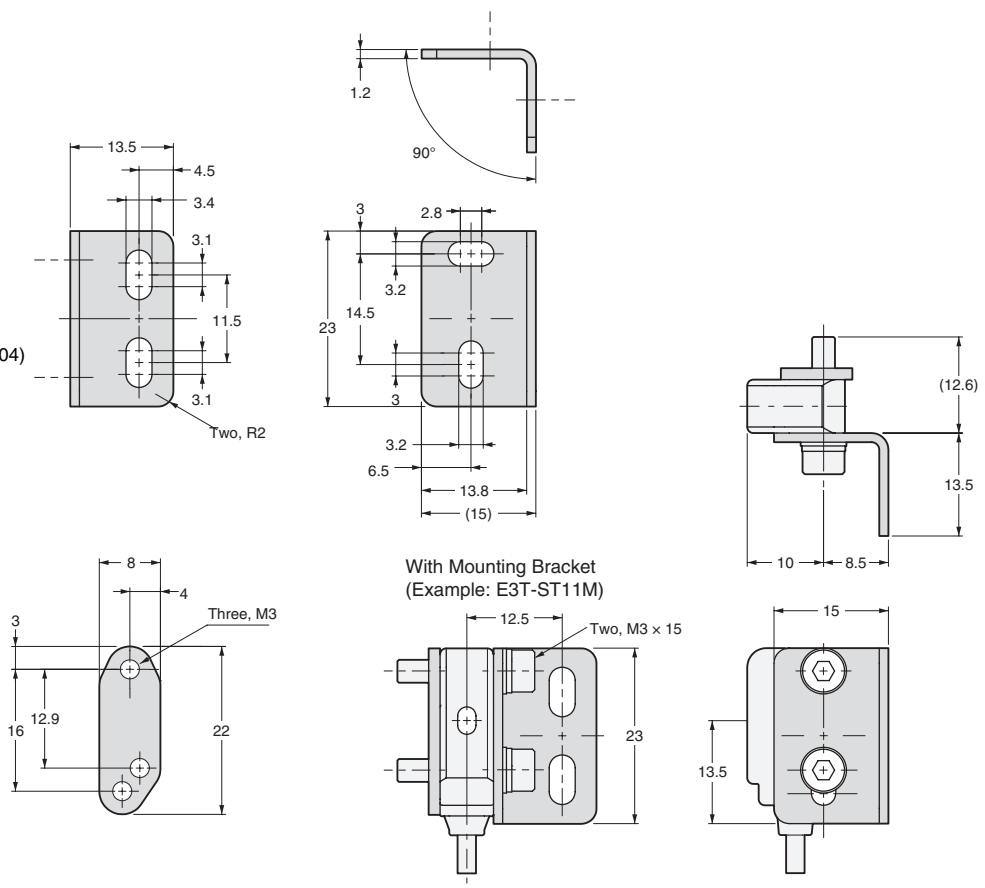


E39-L167



Material: Stainless steel (SUS304)
1.5-mm-thick

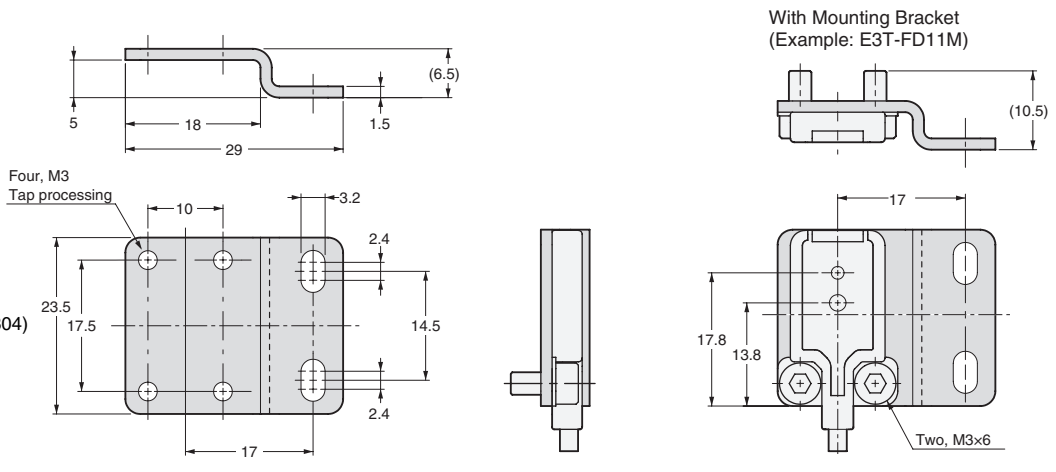


E39-L168

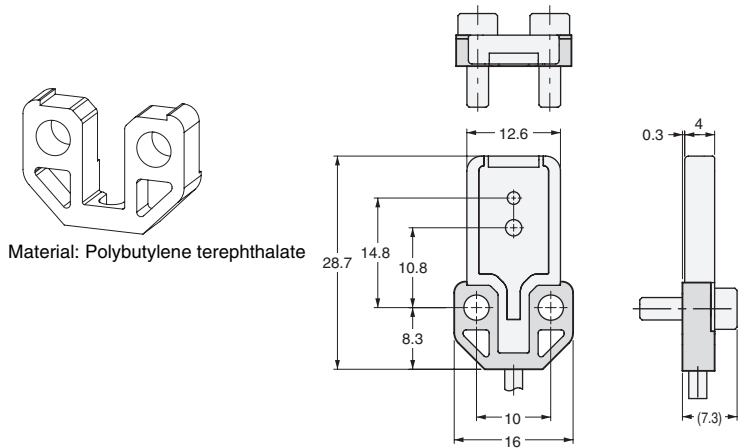


Note: Use this Spacer when mounting the Sensor from the back.

E39-L180

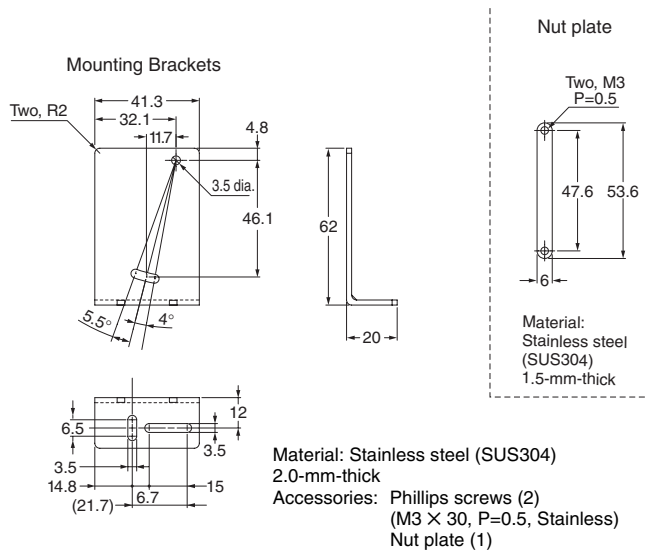

E39-L181

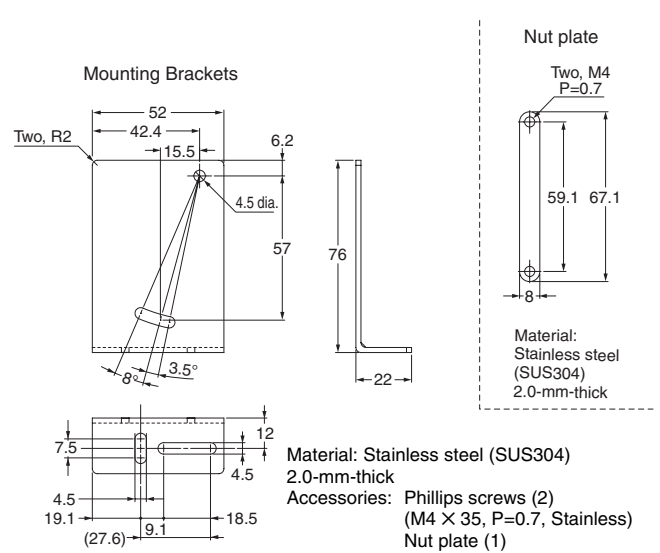


Reflector dimensions


(Unit: mm)

Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

E39-R1 E39-R1S E39-R1K *




Material,
reflective surface: acrylic
Rear surface: ABS

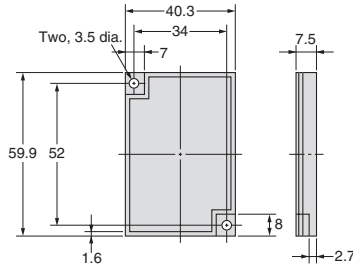


* E39-R1K only
Coating on reflective surface

E39-R2




Material,
reflective surface: acrylic
Rear surface: ABS

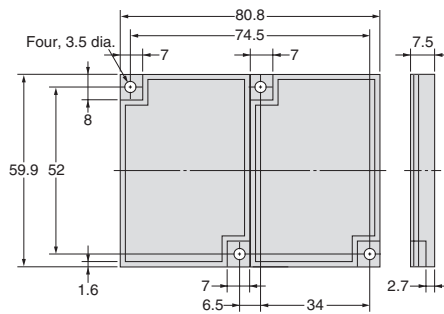


E39-R9




Material,
reflective surface: acrylic
Rear surface: ABS

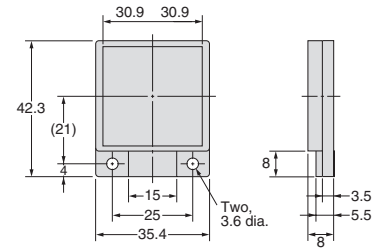

E39-R10




Material,
reflective surface: acrylic
Rear surface: ABS

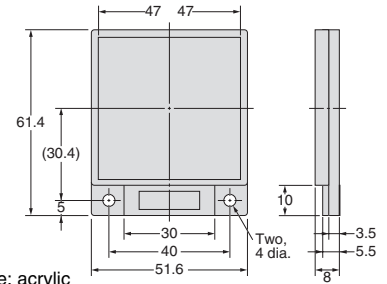

E39-R3




Material,
reflective surface: acrylic
Rear surface: ABS

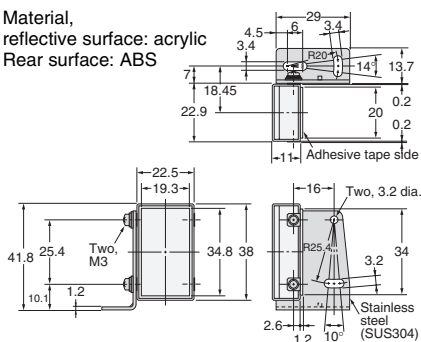


E39-R4



Material,
reflective surface: acrylic
Rear surface: ABS




E39-R37-CA




Material:
Mounting plate: stainless steel (SUS301)
Reflective surface: acrylic


Note: The reflective plate and mounting plate (1) come as a set.
Reflectors only for E3T-SR4□.

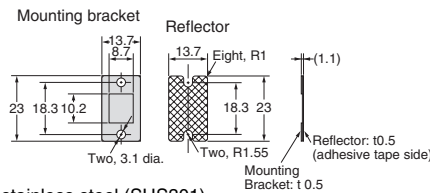

E39-R6




Material,
reflective surface: acrylic
Rear surface: ABS




Retroreflector for E3ZM-B


E39-RP1

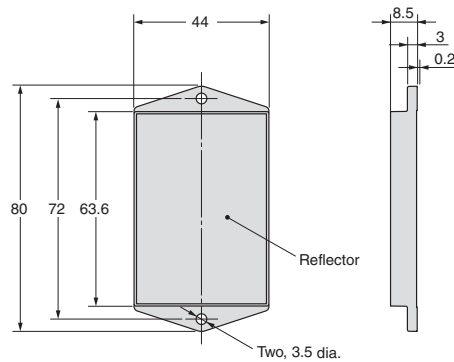


E39-RS1 E39-RS1-CA *1

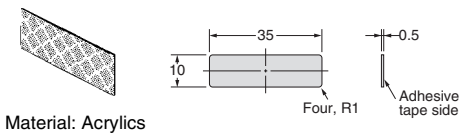


E39-RS2 E39-RS2-CA *1

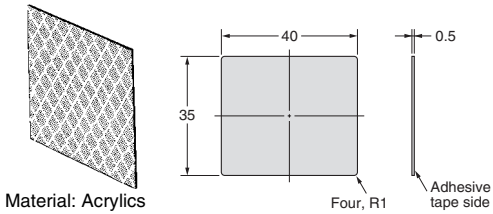


E39-RS3 E39-RS3-CA *1

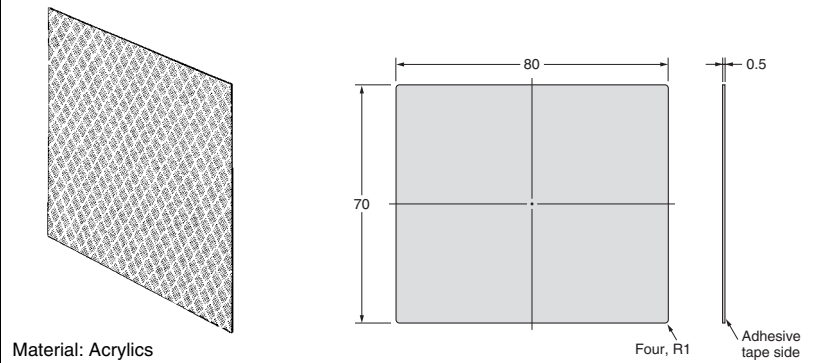


E39-R12/R14 *2

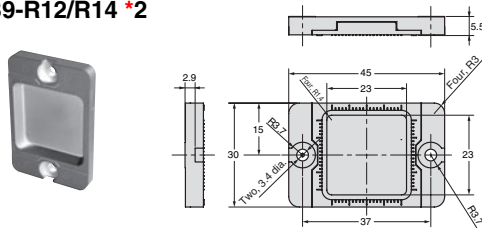


E39-R13 *2

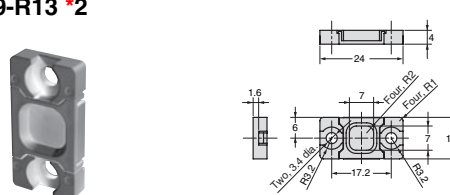

E39-RS4 *2

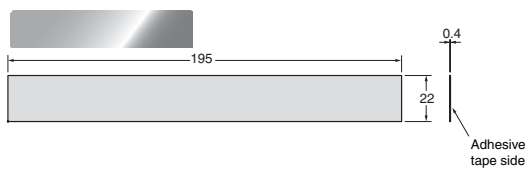

E39-RS5 *2

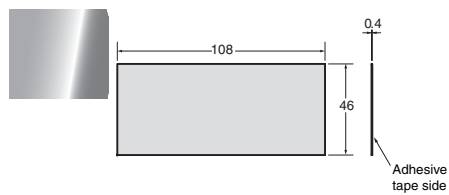

*1. Models ending in the suffix "-CA" are reflectors only for E3T-SR4□.

*2. These Reflectors are for E3C-LDA-series Sensors. However, the E39-R12 can also be used with an E3Z-LR□ Retroreflective Laser Sensor.

Промэлектроника
sales@prom-elec.com