


LOC	DIST	REVISIONS					
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			J4	REVISED PER ECO-11-005294	27APR11	RK	HMR

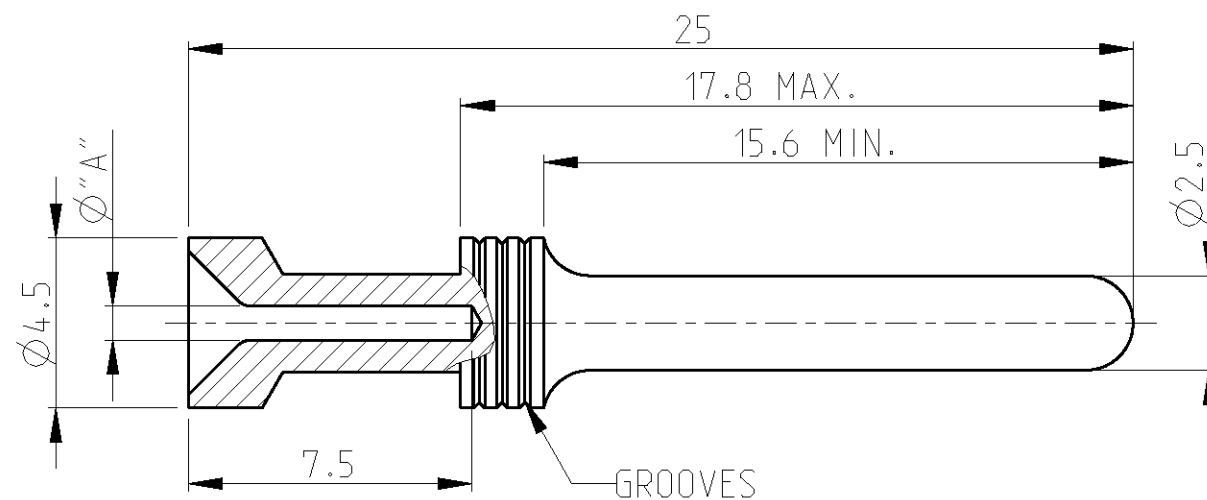


Notes

- | | |
|----|--|
| 1 | MATERIAL: BRASS |
| 2 | FINISH SILVER PLATING: 2 μ m Ag MIN. OVER Cu |
| 3 | FINISH GOLD PLATING: 0.75 μ m Au MIN. OVER Ni |
| 4 | FINISH TIN PLATING: 0.6 μ m Sn MIN. OVER Cu |
| 5 | NO VENTILATION HOLE REQUIRED AT CROSS-SECTION >4.0 MM ² |
| 6 | WEIGHT: 1.35 g, PER PIECE (APPROX.) |
| 7 | PACKAGING: 50 PIECES IN POLYBAG |
| 8 | PACKAGING: 500 PIECES IN POLYBAG & CARTON |
| 9 | PACKAGING: 5000 PIECES IN POLYBAG & CARTON |
| 10 | PACKAGING: 20000 PIECES IN POLYBAGS & CARTONS |
| 11 | SUITABLE SOCKET CONTACT: CUSTOMER DRAWING 1105101 |
| 12 | SUITABLE INSERTS: SERIES HA, HE, HVE, HVS, CUSTOMER DRAWING |
| 13 | SUITABLE CRIMP TOOL: PN 1-1105851-8 |
| 14 | SUITABLE INSERTION TOOL: PN 0-1102855-6 |
| 15 | SUITABLE EXTRACTION TOOL: PN 0-1102855-7 |
| 16 | STANDARDS: DIN EN 61984, DIN EN 60664-1 |

 OBSOLETE

HE/HA-C-Sti.Sn 4,0mm ²	TIN 	4.0	2.8	-	-	5-0	-	5-3
HE/HA-C-Sti.Sn 2,5mm ²		2.5	2.2	3	-	4-0	-	4-3
HE/HA-C-Sti.Sn 1,5mm ²		1.5	1.7	2	-	3-0	-	3-3
HE/HA-C-Sti.Au 4,0mm ²	GOLD 	4.0	2.8	-	5-2	5-9	-	-
HE/HA-C-Sti.Au 2,5mm ²		2.5	2.2	3	4-2	4-9	-	-
HE/HA-C-Sti.Au 1,5mm ²		1.5	1.7	2	3-2	3-9	-	-
HE/HA-C-Sti.Au 0,75-1,0mm ²		0.75-1.0	1.4	1	2-2	2-9	-	-
HE/HA-C-Sti.Au 0,5mm ²		0.5	1.1	-	1-2	1-9	-	-
HE/HA-C-Sti.Au 0,14-0,37mm ²		0.14-0.37	0.9	3	6-2	6-9	-	-
HE/HA-C-Sti.Ag 4,0mm ²	SILVER 	4.0	2.8	-	5-1	5-8	-	-
HE/HA-C-Sti.Ag 2,5mm ²		2.5	2.2	3	4-1	4-8	7-1	-
HE/HA-C-Sti.Ag 1,5mm ²		1.5	1.7	2	3-1	~~3-8~~ 	-	-
HE/HA-C-Sti.Ag 0,75-1,0mm ²		0.75-1.0	1.4	1	2-1	2-8	-	-
HE/HA-C-Sti.Ag 0,5mm ²		0.5	1.1	-	1-1	1-8	-	-
HE/HA-C-Sti.Ag 0,14-0,37mm ²		0.14-0.37	0.9	3	6-1	6-8	-	-
		[MM ²]	"A"	NO.OF GROOVES	P.U.=50	P.U.=500	P.U.=5000	P.U.=20000
ORDERING TEXT	PLATING	CROSS SECTION	DIMS		BAG	BOX	BOX	BOX
				MARKINGS	PACKAGING UNIT			
		PARTS LIST						

		DWN H.BRAUN		21Apr 2010		 TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK -		NAME	
mm				APVD 29AUG2007		PIN CONTACT SERIES HA, HE, HVE	
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±0.5°		PRODUCT SPEC 108-74004			
MATERIAL		FINISH		APPLICATION SPEC 114-74003		RESTRICTED TO	
				WEIGHT -		SIZE A3	
				CUSTOMER DRAWING		CAGE CODE 00779	
						DRAWING NO C-1105100	
						SCALE 5.1	
						SHEET 1 OF 1	
						REV J4	