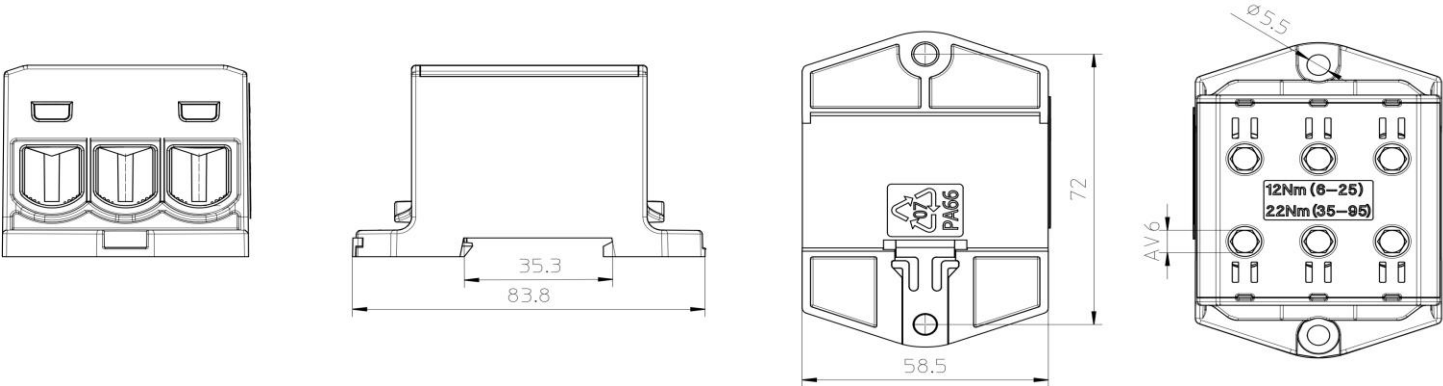


Product data			
Product code	VC05-0234	STK-code	1912361
		EAN-code	6410019123616
Product name	OTL-connector 3xAl/Cu 6-95mm ² (Grey)		ETIM class
			EC000276
Wires	3xAl/Cu 6-95mm ²		

Technical data			
Nominal current (IEC)	Cu	245	A
	Al	220	A
Nominal voltage (IEC)		1000	V
Max. Current (US)	Cu	230	A
	Al	180	A
Max. Voltage (US)		600	V
Number of poles		1	pcs
Max. Cross section		95	mm ²
Tightening torque			
	6-25 mm ² (3-10 AWG)	12	Nm
	35-95 mm ² (4/0-2 AWG)	22	Nm
		-	
		-	
Max. Operating temperature		80	°C
Weight		178	g
IP-protection		IP20	
Standards	EN 61238-1; EN60947-7-1; UL1059		
Color / Material	Grey RAL 7035/ PA66-V0		
Mounting / Connection	DIN-rail and screw (M5) mounting		

Description			
OTL-connectors are designed for connecting and branching aluminium and copper conductors. The body is made of tin plated aluminium. Housing is made of UL94 V0 class polyamide.			
Drawing			

			
--	--	--	--

Package			
Package	Box	Pcs / Package	6
		Weight [kg]	1,17
Length [mm]	202	Width [mm]	128
		Height [mm]	95

Ouneva Oy			
Teollisuustie 21			
FI-82730 Tuupovaara		Tel. +358 400 179 750	
Finland		info@ouneva.fi	
		www.ounevagroup.fi	
		www.ounevaproducts.fi	