



MILAN S.r.l. a socio unico

Head Office – Export department:
Viale Europa, 74
20090 Cusago (MI) Italy
T. +39 02 9039.4556-4158
F. +39 02 9039.4551
www.taskercables.com


Ufficio Commerciale e Centro Distribuzione
Viale Europa 72 Strada F12
20090 Cusago (MI) Italy
T. +39 02 9039.0037-0059
F. +39 02 9039.0049
www.tasker.it



Technical Datasheet

tasker® C125 – 3x0,12 + 2x0,12 mm²

Special Video/Audio Cable

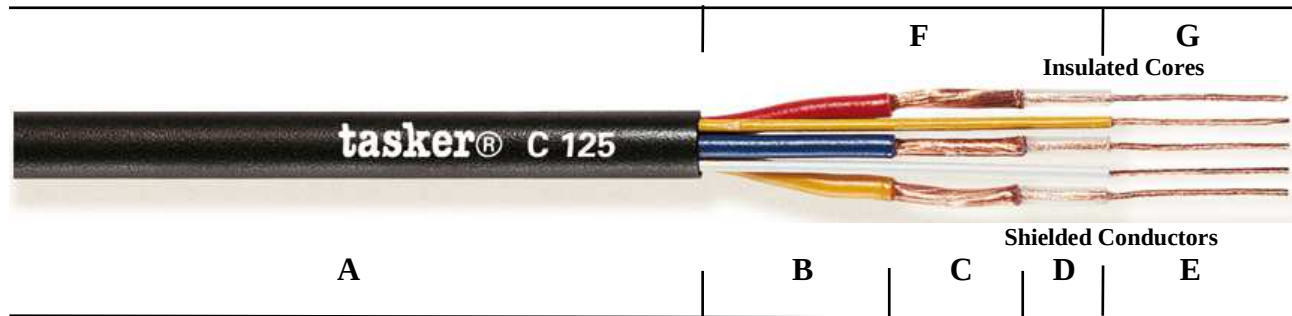

CATEGORY Special Video/Audio Cable (See Video Catalogue)
APPLICATIONS SCART, S-VHS and other Audio/video installations.

A: Black Soft **PVC** Sheath. Outer Diam. Ø 6,00 (±0,20) mm.

3 x Shielded Conductors:

B: Soft **PVC** Sheath. Colored Red, Blue, Yellow.
Diam. Ø 2,10 (±0,20) mm.
C: O.F.C. red copper spiral shielding, covering 100%.
D: Dielectric insulation in transparent PE. Diam. 1,00 (±0,20) mm.
E: O.F.C. red copper Stranded formation 16x0,10 mm.
Nom. Cross Section 3x0,12 mm².

2x Insulated Cores:

F: Soft **PVC** Sheath. Yellow and White.
Diam. Ø 1,00 (±0,20) mm.
G: O.F.C. red copper Stranded formation 16x0,10 mm.
Nom. Cross Section 3x0,12 mm².

MARKING CUSTOM PRODUCTION

tasker® C125 3x0,12 + 2x0,12 SPECIAL VIDEO-AUDIO CABLE
This product may be custom produced also in **LSZH, PE, PUR**,
with or without Metallic Armor.

General Properties

Conductors Resistance	140 Ω/Km
Capacity Core/Shield	270 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio
Impiego		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 16.05.17

Capitale Sociale € 100.000,00 i.v. Cod. Fisc. e P. IVA 03835660154
R.E.A. MI 975732 Reg. imprese MI 178864-5179-14
PEC: taskerpec@legalmail.it



AZIENDA
CERTIFICATA
UNI EN ISO
9001

