

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT

Technical characteristics:

Specifications
DIN EN 60 664-1
DIN EN 61 984



Inserts

- 01. Number of contacts :64+PE
- 02. Rated Current :10A
- 03. Rated Voltage :250V
- 04. Pollution degree :3
- 05. Rated impulse voltage :4kv₁₀
- 06. Insulation resistance :≥10¹⁰Ω
- 07. Material:Polycarbonate
- 08. Rated voltage acc. to UL/CSA:600V
- 09. Limiting temperatures : -40℃~+125℃
- 10. Flammability acc. to UL94:V0
- 11. Mechanical working life (mating cycles) :≥500

Contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Contact resistance :≤3mΩ
- 04. Terminal :Crimp terminal
- 05. Wire gauge :0.14-2.5mm² (AWG 26-14)
- 06. Stripping length :8.0mm
- 07. Rohs Compliance

Note:Crimp contact pins should order separately

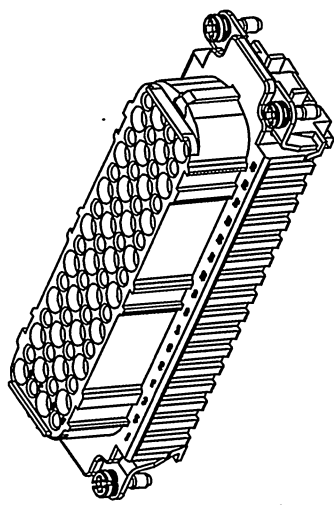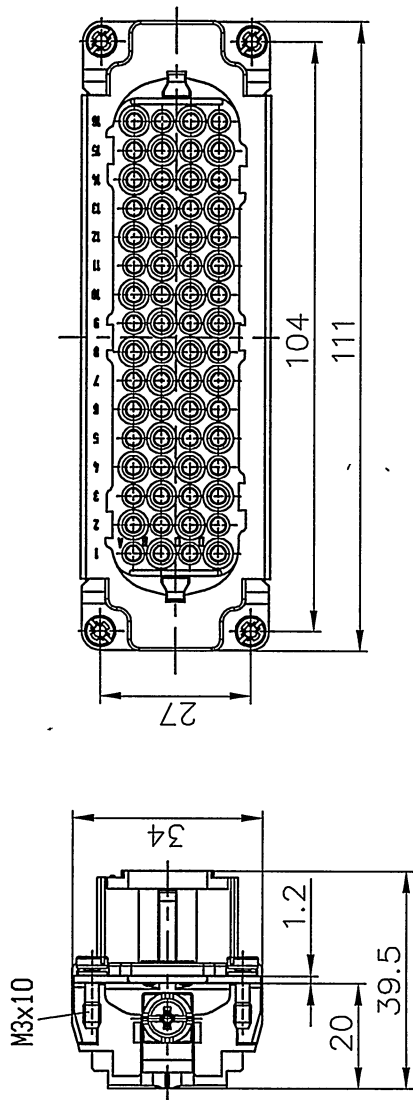

PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD			
		NINGBO DEGSON ELECTRICAL CO., LTD			
APPD: HJS 2016.8.26		NAME: DD-064-FC			
CHKD: LTM 2016.8.25					
DRFT: Mr. Yang 2016.07.25		TITLE: CUSTOMER DRAWING		REV	DO-1
		DRAWING NO.: DD-064-FC-E01		SHEET	
				1/1	
		DO NOT SCALE DRAWING		SCALE	
THIRD ANGLE PROJECTION					