EN

CATALOGUE**2020**

wiha

Tools that work for you

TOOLS

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА

wiha
ErgoStar
wiha

Wiha – our goal: your success

- **Your guarantee for quality**
  Winner of the Manufacturing Excellence Awards 2014 as the best SME in Germany.
- **Reliable and dependable**
  German family-owned company with more than 80 years of experience.
- **Your advantage**
  Customised problem-solving for professionals.
- **Cutting-edge technology**
  Award-winning innovations valued by professionals throughout the world.

What makes your work easier? Tools that increase your efficiency, reduce costs and preserve your health. This is why Wiha develops, designs and manufactures products that meet the highest functionality, durability and ergonomic demands.

Founded over 80 years ago as a small family-owned business for standard parts and screws, Wiha has grown to become a global company with factories all over Europe, Asia and the United States and are still owner-operated by the Hahn family.

Wiha offers the professional a wide range of high-quality premium tools, characterized by their use of the latest manufacturing technologies, application-oriented innovations, ergonomic superiority, top quality, absolute reliability and long service life. In short, tools that make your work noticeably easier - tools that work for you.

Learn more about Wiha on our website:
www.wiha.com

Wiha visions and values

With responsibility and innovation, Wiha is set for a successful future.

What makes a company successful? Providing excellent products and having a good company culture are key. The high quality of Wiha tools in their form and functionality is confirmed by the many international awards they have received. As an owner-operated family-owned company, we foster a culture of togetherness. From employee development to active customer management, Wiha does everything they can to create optimum working and business conditions and a foundation for sustainable success.

As a member of the BME Compliance Initiative, Wiha complies with a code of conduct which obligates the company to follow business conduct rules, principles of social responsibility and the obligation to promote suppliers, ensuring the lawful behaviour of the company and its employees.

In 2016, Wiha was crowned one of the TOP 100 most innovative mid-sized companies in Germany. Thanks to their practised culture of innovation, Wiha was able to succeed at the competition held as part of the "German Mid-Sized Company Summit." We took this as encouraging confirmation of our company philosophy, which focusses onprogress and vision.

Wiha – our visions

- **A financially successful family-owned company**
  For more than 80 years, Wiha has been a successful owner-operated company in the market.
- **Premium international brand**
  Wiha supplies an international market fromfactories in Europe, Asia and the USA.
- **Highly motivated first-class team:**
  Wiha employees are competent, committed and motivated thanks to their optimum working conditions.
- **User- and application-focused:**
  Wiha products enable the user to work in an efficient and health-friendly way.

Wiha design awards
Ergonomics, highly prized by all.

To us, positive feedback from people for whom we make our tools is the most rewarding confirmation of our work. All the same, we can also be more than a little proud when the high ergonomic quality of our products is confirmed at the "highest" level, as many of them have been distinguished with coveted design awards. In addition to this, our company and production quality were also honoured with awards. With this praise and confirmation from every direction, it's no wonder that Wiha are on the right track with ergonomic tool concepts and a future-oriented philosophy.

26one®
2015 / 2017 / 2018

GERMAN DESIGN AWARD WINNER 2018

reddot design award winner 2017

iF DESIGN AWARD 2017

Focus Open 2017 Silver

speedE®
2018 / 2019

GERMAN INNOVATION AWARD '19 GOLD

GERMAN DESIGN AWARD GOLD 2019

Focus Open 2018 Special Mention

german brand award '19 winner

reddot winner 2019
best tools brand

TOP 100 top innovator 2019

AaA Audit attraktiver Arbeitgeber

IHK Industrie- und Handelskammer Schwarzwald-Baar-Heuberg

MANUFACTURING EXCELLENCE AWARD BESTES KMU 2014

slimBit electric bit set
2019

reddot award 2019
winner

Focus Open 2019
Silver

Torque QuickCheck
2020

GERMAN DESIGN AWARD WINNER 2020

Wiha tools with AGR approval

The world's first tools awarded the seal of approval for efficient and health-preserving work.

Geprüft und empfohlen vom Forum: Gesunder Rücken - besser leben e.V. und dem Bundesverband deutscher Rückenschulen (BdR) e.V. Weitere Infos bei: AGR e.V., Stader Str. 6, 27432 Bremervörde, Tel. 04761/92 63 580, www.agr-ev.de

Ergonomic excellence!
Wiha is the world's first hand tool manufacturer to receive the AGR seal for its Inomic® pliers and ergonomic handle design on screwdrivers. This distinction enjoys broad acceptance by medical professionals

Ergonomic excellence - The Wiha screwdriver handle size concept and Wiha Inomic® pliers handle concept. When you are the first hand tool manufacturer in the world to have products distinguished with the renowned AGR quality seal, it's a sensation. Very few everyday objects are able to pass the stringent tests of the AGR, whose seal enjoys broad acceptance by medical professionals for very good reason.

For years, the AGR have been dedicated to promoting and researching the prevention of back pain and they offer recommendations on products which help to prevent musculoskeletal disorders and back pain.

Wiha have now been officially recognised for their ergonomic screwdriver handle size concept and Inomic® pliers handle concept. To us, this distinction is confirmation of our philosophy: To develop tools enabling the professional to not only work efficiently, but also in a health-preserving way. Wiha's screwdriver handle size concept features four handle sizes and lengths, each optimally suited to its respective fastening or work task to ensure healthy work. The angled "pistol handle" of the Wiha Inomic® pliers handle concept relieves the user's wrist while working.

Both handle concepts help users to reduce, or even fully prevent, discomfort in their musculoskeletal system and pain in their joints and muscles. The result? With Wiha, your work is easier, you don't get fatigued as quickly, you work more efficiently and you simply feel better at the end of the working day. As our campaign logo motto goes: "I feel Wiha!"

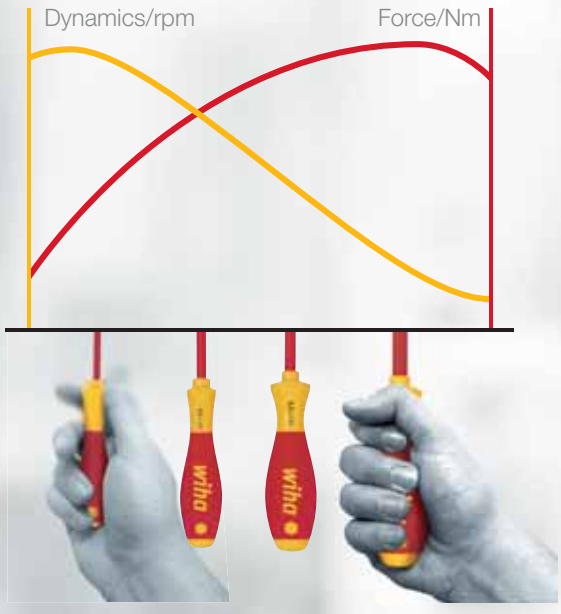

Wiha SoftFinish® handle sizes

Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.

Quick-turning - Motor skills are consistently taken into consideration.

Maximum power transmission, comfortable to use and without loss.

VDE-insulated tools from Wiha

To work safer, more efficiently and with less strain on the body.

Certified safety – from our own safety testing procedure according toIEC standards.

Voltage testing: All Wiha VDE-tools, which have special markings, are individually tested at 10,000 V AC and are approved for 1,000 V AC and 1,500 V DC.

Cold shock test: Cooling down to -25° C. The skinning material must retain its toughness, so that it doesn't break when subjected to shock and knocks.

Test of electrical skinning properties: 24 hours storage in water, then 3 minutes test at 10,000 V AC. There must neither be flashover nor disruptive discharge.

Test of the adhesion of the skinning material coating: 168 hours storage at 70° C, then test of adhesion at 500 N.

Pressure tests: Test at 20 N pressure load, 70° C temperature and 5,000 V AC test voltage. No disruptive discharge may occur.

Test of combustion behaviour: The tools are subjected to a flame for 10 seconds. The skinning material must then extinguish and not continue to burn.

Safety note

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulated tools
- insulating safety mechanisms

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- ensure power is switched off
- cover or block off adjacent live components
- secure against reconnection
- earth and short-circuit

As an internationally recognized institute, the VDE is responsible for the testing and certification of electrotechnical products. Wiha provides the professional with a broad range of VDE products, developed and continuously optimized specifically for electricians, which also provide applicationoriented solutions for everyday use.

The Wiha quality-management system according to ISO 9001:2015 ensures that only first-class products are manufactured – and that you can work with products of excellent quality. To ensure maximum safety for the user, the entire Wiha VDE range must undergo the most stringent inspections and individual tests. All Wiha VDE-tools hold multiple certifications: The VDE-GSmark stands for safety with regard to any risk, from electrical right up to radiological. Products labelled with a double triangle and a voltage range are suitable for work with live parts.

The international standard IEC 60900 defines the construction, safety as well as single, series, andrandom testing of insulated tools. But with Wiha you don't just work safer, but also healthier and moreefficiently. Specially developed ergonomic geometries ensure comfortable handling that protectsthe body from strain. The result: easier work, less signs of fatigue, more efficiency.

1000 V
IEC 60900

83 professionals. One system.
ElectricVario family by Wiha.

There has never been a team with so many exceptional players: the ElectricVario Family by Wiha unites all fastening tools that electricians need for all the challenges in their job. These include many new members to complete the team. The best thing about them: Thanks to the countless combination possibilities, the tools can be used flexibly and thus save valuable time and space. Combinable with one another, the tools also ensure safe screw-fastening on live parts thanks to their insulation. The ergonomically shaped screwdriver handles also help to protect the user's muscles. Professional users play in the Premier League when they use ElectricVario Family products. They can always be identified via the ElectricVario Family logo.

- **Increases your efficiency**
  Various usage options for all fastening procedures and application fields.
- **Offers you full protection**
  Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC.
- **Increases your safety**
  Wiha slimBits ensure unrestricted and fully insulated access to low-lying screws.

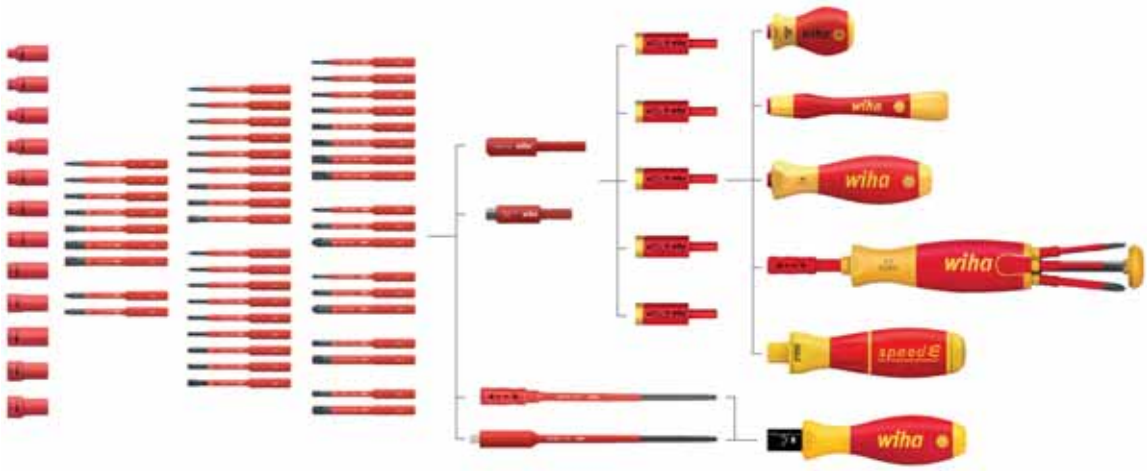

ELECTRIC
VARIO FAMILY
TEAM
wiha

Content

Competence XXL II electrician's tool set
Page 138

Tool set service technician
Page 142

Tool set slimVario® electric
Page 143

Tool set electrician
Page 143

E-screwdriver, set 2, speedE®
Page 156

speedE® Industrial e-screwdriver set
Page 159

Flashlight with LED, laser and UV light
Page 160

Single-pole, non-contact volt detector, 12–1,000 V AC
Page 160

Screwdriver and bit set slimVario® screwdriver
Page 164

slimBit electric bit set
Page 168

Screwdriver SoftFinish® electric slimFix
Page 172

Screwdriver SoftFinish®
Page 178

LiftUp 26one® skruetrækker med bitmagasin
Page 194

Torque screwdriver TorqueVario®-S electric
Page 195

Torque screwdriver with T-handle TorqueVario®-S T electric
Page 200

Torque screwdriver iTorque®
Page 201

Screwdriver with bit magazine LiftUp electric
Page 214

Screwdriver with bit magazine, LiftUp 26one®
Page 214

Multitool PocketStar
Page 217

Nut driver insert set gripper,
Page 220

L-key set in ErgoStar holder
Page 230

L-key set in ProStar holder
Page 232

L-key set in ProStar holder
Page 232

L-key set in ErgoStar holder
Page 235

BitBuddy® TY bit set, 29 mm
Page 257

XLSelector T bit set, 50 mm
Page 258

TY bit set 29 mm
Page 258

T bit set, 25 mm
Page 260

Installation pliers TriCut Professional electric
Page 287

Combination pliers Professional electric with DynamicJoint® and OptiGrip
Page 290

Stripping tool automatic
Page 295

Automatic crimp tool, for wire-end sleeves hex crimping
Page 298

Soft-faced hammer set Safety
Page 328

Soft-faced hammer Safety soft/medium hard
Page 329

Soft-faced hammer dead-blow, medium hard
Page 332

Electrician's hammer
Page 334

Ratchet wrench set insulated 3/8”
Page 147

Tool set mechanic
Page 151

Tool set ESD
Page 153

Ranges
From page 136

Torque QuickCheck torque testing device
Page 161

Electro
From page 154

Fine screwdriver PicoFinish
Page 184

Screwdriver MicroFinish®
Page 187

Screwdriver SoftFinish® ESD
Page 189

Screwdrivers
From page 162

Torque screwdriver TorqueVario®-S
Page 202

Torque screwdriver with T-handle TorqueVario®-S T
Page 206

Torque screwdriver TorqueVario®-S ESD
Page 209

Torque tools
From page 192

Screwdriver with interchangeable blade set SYSTEM 6
Page 221

Screwdriver with interchangeable blade set SYSTEM 6
Page 221

Screwdriver with interchangeable blade set SYSTEM 4 ESD
Page 223

Multitools
From page 212

L-key set in ProStar holder
Page 237

L-key with T-handle ComfortGrip
Page 247

L-key with key handle
Page 251

L-keys
From page 228

Y bit set, 25 mm
Page 261

Bit Professional 1/4"
Page 270

Bit holder CentroFix Force mechanically lockable 1/4", magnetic
Page 280

Bits
From page 254

Professional BiCut® high-performance diagonal cutters with DynamicJoint®, Switchable
Page 301

Pliers wrench Classic
Page 308

Classic circlip pliers with MagicTips®, straight
Page 312

Pliers
From page 284

SoftFinish® dowel racket set with dowels
Page 334

Electrician's spirit level 40 cm
Page 335

Electrician's Longlife® folding ruler, 2 m metric, 10 segments
Page 336

Impact tools / Measurement tools
From page 326

Information
From page 338

wiha
Tools that work for you
wiha

Meets your requirements: Case: robust, large, stable and secure with lid brake. **Lowers your costs:** The correct torque protects material from damage and ensures no additional follow-up work. **Increases your safety:** Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. **Protect your health:** Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Trolley with stable in-line rollers allow easy and stress-free transportation of tools to the work area. **Increases your efficiency:** A comprehensive tool assortment, always providing you with the right tool when it is needed. The design and function of the tool trays guarantee quick and easy access to tools. **Increases your flexibility:** Ample space for additional tools and lots of storage for small parts and machines.

Competence XXL II electrician's tool set

9500-704

Meets your requirements: Case: robust, large, stable and secure with lid brake. **Lowers your costs:** The correct torque protects material from damage and ensures no additional follow-up work. **Increases your safety:** Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. **Protect your health:** Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Trolley with stable in-line rollers allow easy and stress-free transportation of tools to the work area. **Increases your efficiency:** A comprehensive tool assortment, always providing you with the right tool when it is needed. The design and function of the tool trays guarantee quick and easy access to tools. **Increases your flexibility:** Ample space for additional tools and lots of storage for small parts and machines.

Competence XXL II electrician's tool set assorted in case 115-pcs.
Order-No. 42069
More information: Page 138

Further information:

The perfect complement:

E-screwdriver, set 2, speedE®
Order-No. 41912
More information: Page 156

VDE-certified tools

Insulated tools are essential for all work on or around live components.

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

9300-702

Meets your requirements: Case: robust, large, stable and secure with lid brake. **Lowers your costs:** The right tool protects you from damaging materials and avoids subsequent work. **Increases your safety:** Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. **Protect your health:** Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Carry belt enables the simple transport of the tool case and keeps hands free for other materials. **Increases your efficiency:** A comprehensive tool assortment, always having the right tool at hand when needed. The design and function of the tool trays guarantee quick and easy access to tools. **Increases your flexibility:** Ample space for additional tools and lots of storage for small parts and machines.

Tool set electrician Competence XL assorted 80-pcs. in case
Order-No. 40523
More information: Page 140

The perfect complement:

Torque screwdriver set TorqueVario®-S electric
Order-No. 36791
More information: Page 194

7209N

1000 V
IEC 60900

Simplifies your work: All tools securely arranged in a robust, orderly bag. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws. **Increases your efficiency:** Space saved thanks to extensive interchangeable bit system and nut driver inserts. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Protects your material:** Fully insulated nut driver reduces the risk of short circuits.

Tool set slimVario® electric
mixed, 31-pcs. in functional bag
Order-No. 43465
More information: Page 143

Protect your health: Recommended by doctors and therapists at Fixing by hand with a deft touch. **Offers you full protection:** slimBits **speed:** Work twice as fast thanks to three-step process. **Protects** prevent damage to materials (max. 0.4 Nm).

German Campaign for Healthier Backs. **Increases your control:** tested at 10,000 V AC and approved for 1,000 V AC. **Increases your your material:** Electric screw fastening with protection function to

Protect your health: Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your control:** Fixing by hand with a deft touch. **Offers you full protection:** slimBits tested at 10,000 V AC and approved for 1,000 V AC. **Increases your speed:** Work twice as fast thanks to three-step process. **Protects your material:** Electric screw fastening with protection function to prevent damage to materials (max. 0.4 Nm).

E-screwdriver, set 3, speedE®
Mixed 25 pcs in L Boxx Mini with slimBits, easyTorque adapters, batteries and EU charger
Order-No. 41913
More information: Page 157

More information:

The perfect complement:

Screwdriver with bit magazine LiftUp electric
Order-No. 41234
More information: Page 214

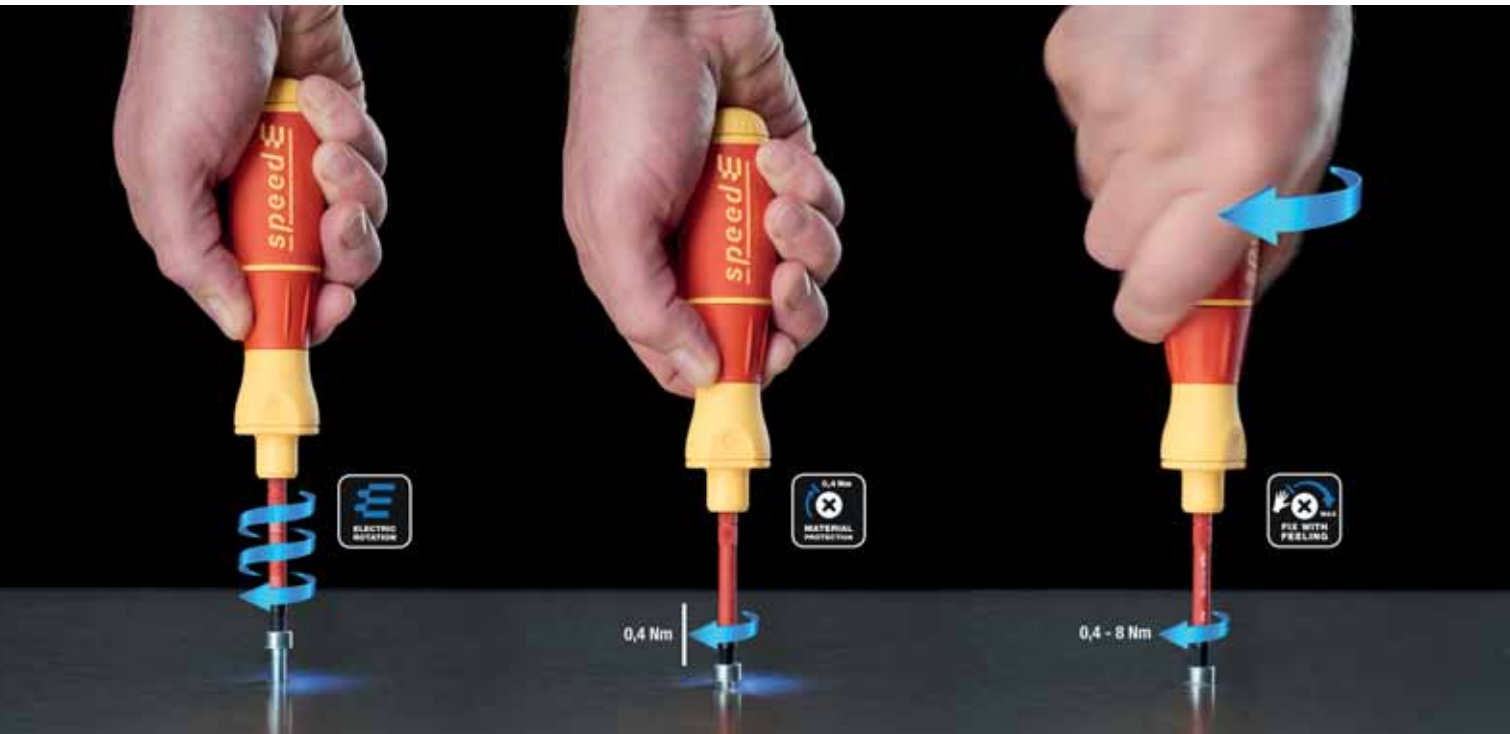

Wiha speedE®

E-screwdriver speedE®

Increases your speed
Power-assisted screw-driving halves working time.

Protects your material
Thanks to the integrated material protection function, the electric assistance stops automatically at 0.4 Nm.

Increases your control
Final screw tightening can then be carried out by hand.

Recommended by doctors and therapists.

slimBits tested at 10,000 V AC and approved for 1,000 V AC.

wiha
71mm

Simplifies your work: Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks. Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape. **Increases your safety:** Power-on time of 2 seconds prevents the laser being activated by accident. **Increases your efficiency:** Very strong LED lamp – two light intensities to adjust to light conditions as required. Includes laser and UV light.

24670

Simplifies your work: Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks. Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape. **Increases your safety:** Power-on time of 2 seconds prevents the laser being activated by accident. **Increases your efficiency:** Very strong LED lamp – two light intensities to adjust to light conditions as required. Includes laser and UV light.

Flashlight with LED, laser and UV light
in blister pack, including 3 AAA batteries
Order-No. 41286
More information: Page 160

More information:







Flashlight with LED, laser and UV light

Universal work tool with integrated laser, UV light and LED light.

Optimum positioning and variable light direction thanks to the magnetic base and swivel head.

The installation position can be projected directly from the middle of a table when fitting lights to the ceiling.

The integrated UV light is ideal for finding misplaced coloured fluorescent Wiha tools and for technical inspections.

LED
2 Level

UV

wiha

Increases your safety: Checking your torque tool regularly guarantees safe, precise work with the correct torque. **Saves time:** LED traffic light system displays results in a way which is quick and easy to understand. **Increases your efficiency:** Fast, easy checking of your torque tool thanks to mobile, compact shape.

wiha
2,8 Nm
2,8 Nm
auto-off: 60 sec
GERMAN
DESIGN
AWARD
GOLD
2019

2909

Increases your safety: Checking your torque tool regularly guarantees safe, precise work with the correct torque. **Saves time:** LED traffic light system displays results in a way which is quick and easy to understand. **Increases your efficiency:** Fast, easy checking of your torque tool thanks to mobile, compact shape.

Torque QuickCheck torque testing device
with adapter blades and batteries in box
Order-No. 42086
More information: Page 161

More information:

Wiha Torque QuickCheck

The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.

Checking tools regularly ensures reliable, precise work.

The device offers user-friendly operation, clear test readings and easy to understand LED traffic light signals.

Thanks to a compact, handy shape, it is the ideal companion when out on jobs.

Suitable for all Torque Vario®-S and iTorque® torque screwdrivers whose torque range included 2.8 Nm.

Simplifies your work: All tools securely arranged in a robust, good, protected access to deep-set screws. **Increases your** space. **Offers you full protection:** Each tool individually tested

orderly bag. **Increases your safety:** Wiha slimBits ensure **efficiency:** Extensive interchangeable blade system saves you at 10,000 V AC and approved for 1,000 V AC.

2831

Simplifies your work: All tools securely arranged in a robust, orderly bag. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws. **Increases your efficiency:** Extensive interchangeable blade system saves you space. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver and bit set slimVario® screwdriver
Mixed, 18-pcs. in folding bag
Order-No. 41231
More information: Page 164

Product video:

The perfect complement:

Screwdriver with bit holder set electric slimVario®
Order-No. 41230
More information: Page 167

25513

Saves time: Rapid voltage test thanks to contactless measuring. **Increases your efficiency:** Compatible for use in all sockets worldwide thanks to measurement tip suited to international usage. Integrated high-luminescence LED flashlight. **Increases your flexibility:** Voltage tester covers a wide voltage range between 12 and 1,000 V AC.

Single-pole, non-contact volt detector,
12–1,000 V AC
Includes two AAA batteries
Order-No. 43797
More information: Page 174

Volt Detector

Single-pole, non-contact volt detector, 12–1,000 V AC

Rapid voltage test thanks to contactless measuring.

Compatible for use in all sockets worldwide thanks to measurement tip suited to international usage.

Voltage tester covers a wide voltage range between 12 and 1,000 V AC.

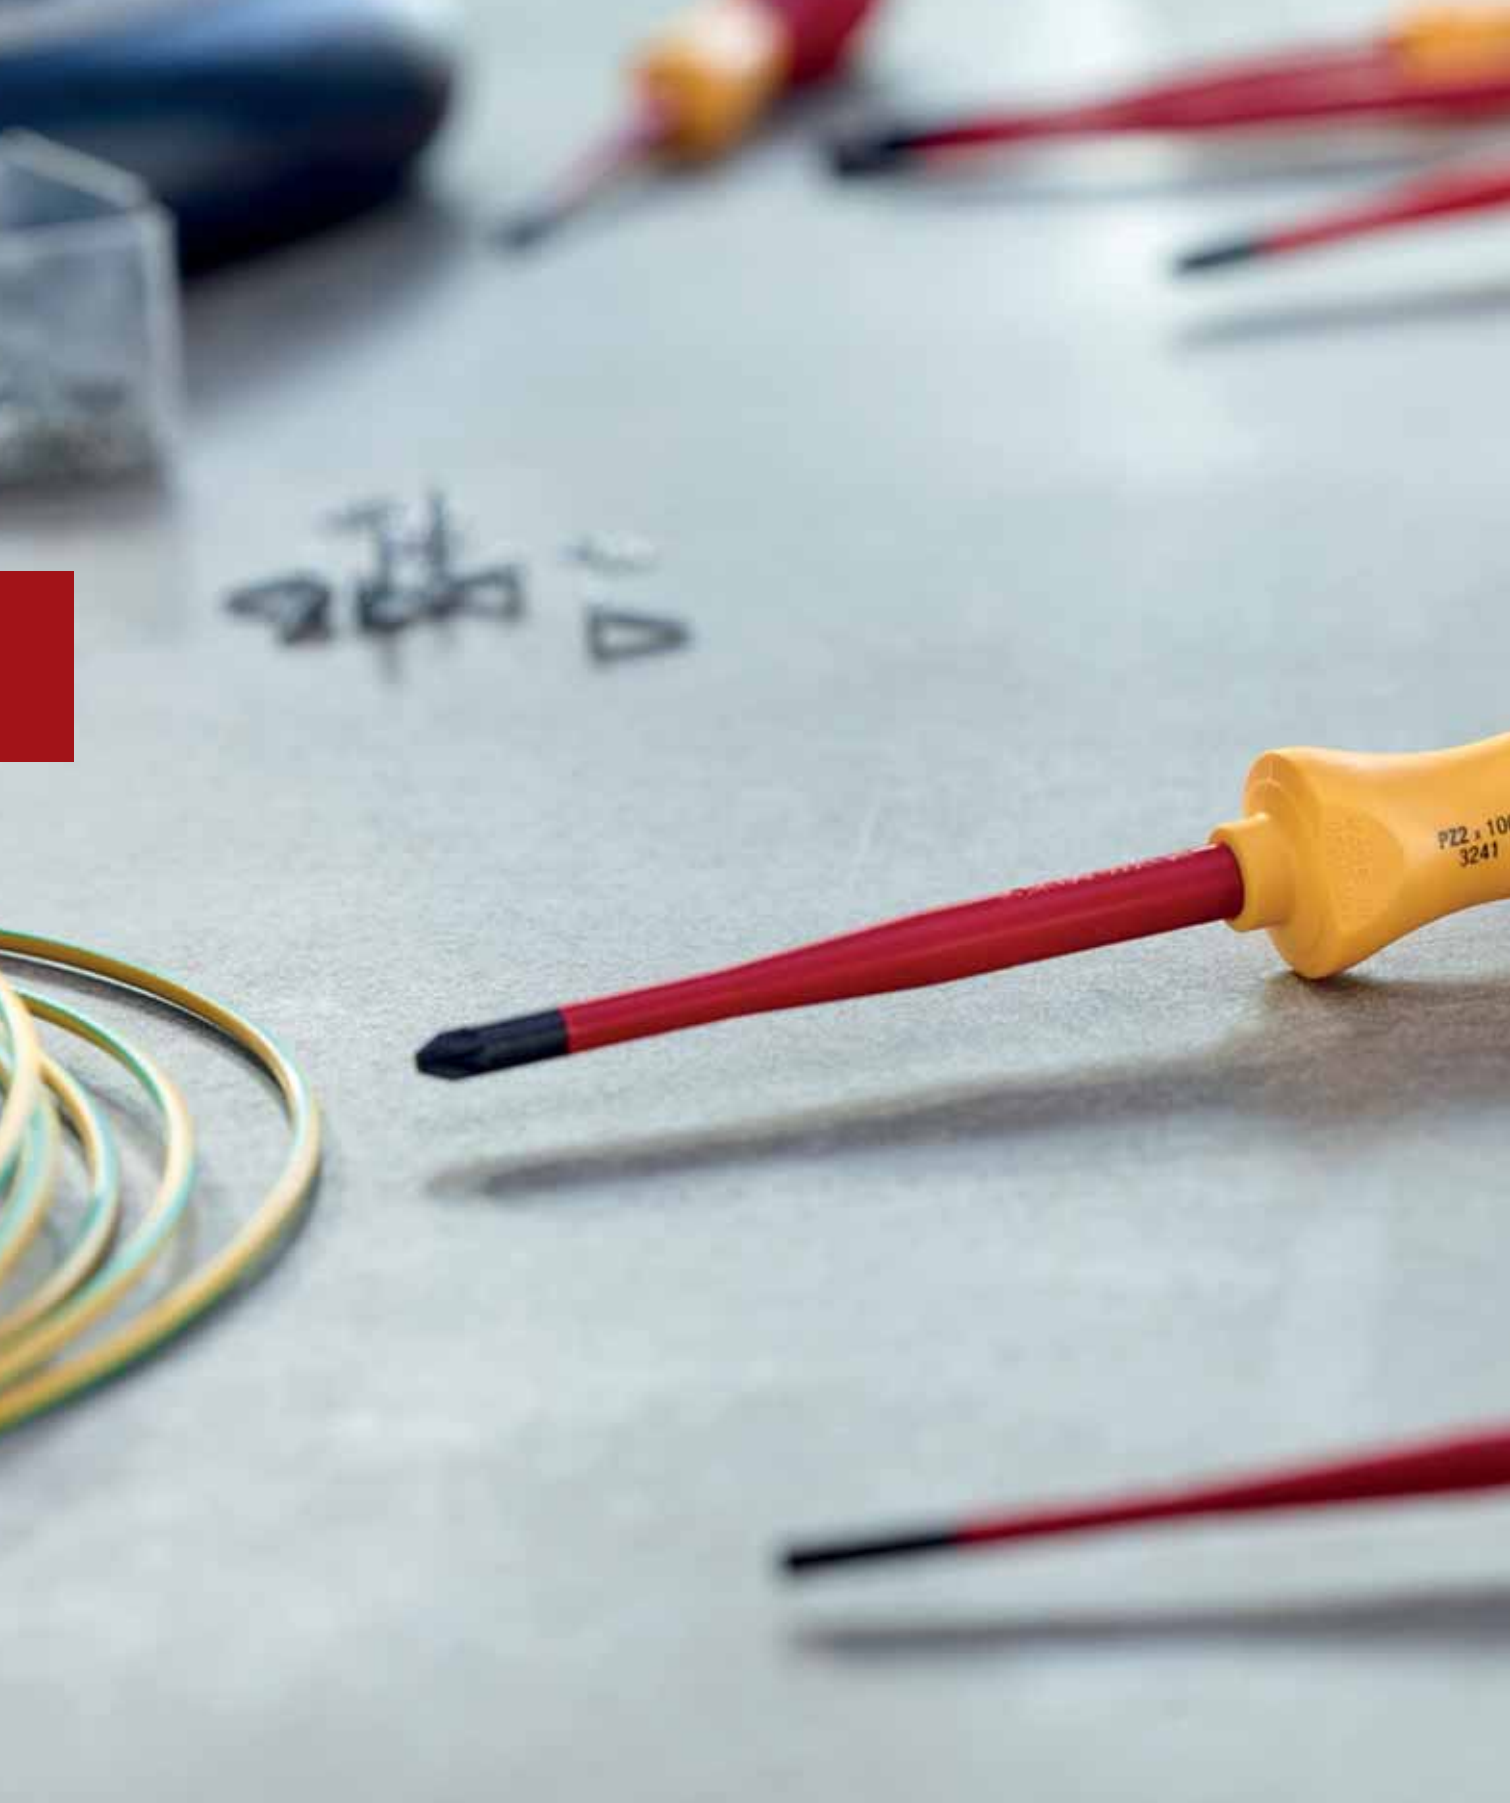

Increases your safety: Wiha slim blades ensure unlimited, the patented SoftFinish® handle design, ensuring work is kind to German Campaign for Healthier Backs. **Increases your efficiency:** and control. **Offers you full protection:** Each tool individually

protected access to deep-set screws. **Protect your health:** With hands and muscles. Recommended by doctors and therapists at Unique Wiha handle-length concept for optimum balance of torque tested at 10,000 V AC and approved for 1,000 V AC.

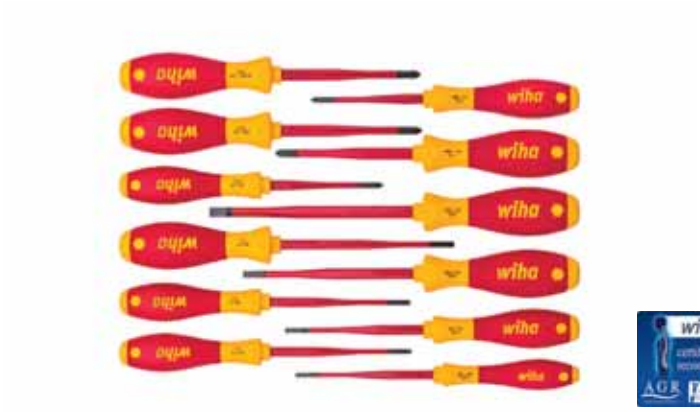

Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver set SoftFinish®
electric slimFix
assorted 12-pcs.
Order-No. 41003
More information: Page 165

Product video:

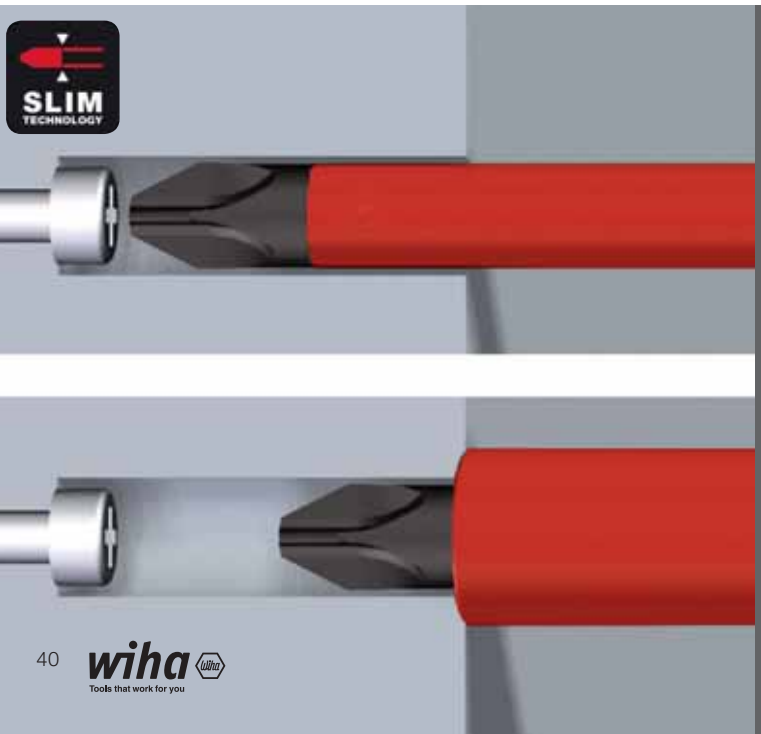

slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

Unlimited access.

Blades up to 33 % narrower due to integrated insulation.

Tool for spring clips (wedge-profiled output geometry).

Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver set SoftFinish® electric slimFix
Slotted, Phillips, PlusMinus/ Pozidriv 6-pcs.
Order-No. 38362
More information: Page 166

Product video:

The perfect complement:

Pliers set Professional electric
Order-No. 26852
More information: Page 286

Wiha SoftFinish® handle sizes

Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.

Quick-turning - Motor skills are consistently taken into consideration.

Maximum power transmission: comfortable and loss-free transmission of physical strength, even during intensive fastening.

The power-turning and quick-turning zones vary significantly over the four handle sizes in various forms.

The Wiha SoftFinish screwdrivers enable work that is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.

2831

SLIM TECHNOLOGY

1000 V IEC 60900

Simplifies your work: Compact handle – maximum power. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws. Protected work in constricted spaces. **Increases your efficiency:** Fully compatible with the Wiha slimBit system. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver with bit holder set electric slimVario®
Stubby, 4 pieces with slimBits
Order-No. 41230
More information: Page 167

Product video:

The perfect complement:

Screwdriver with bit magazine LiftUp electric
Order-No. 41234
More information: Page 214

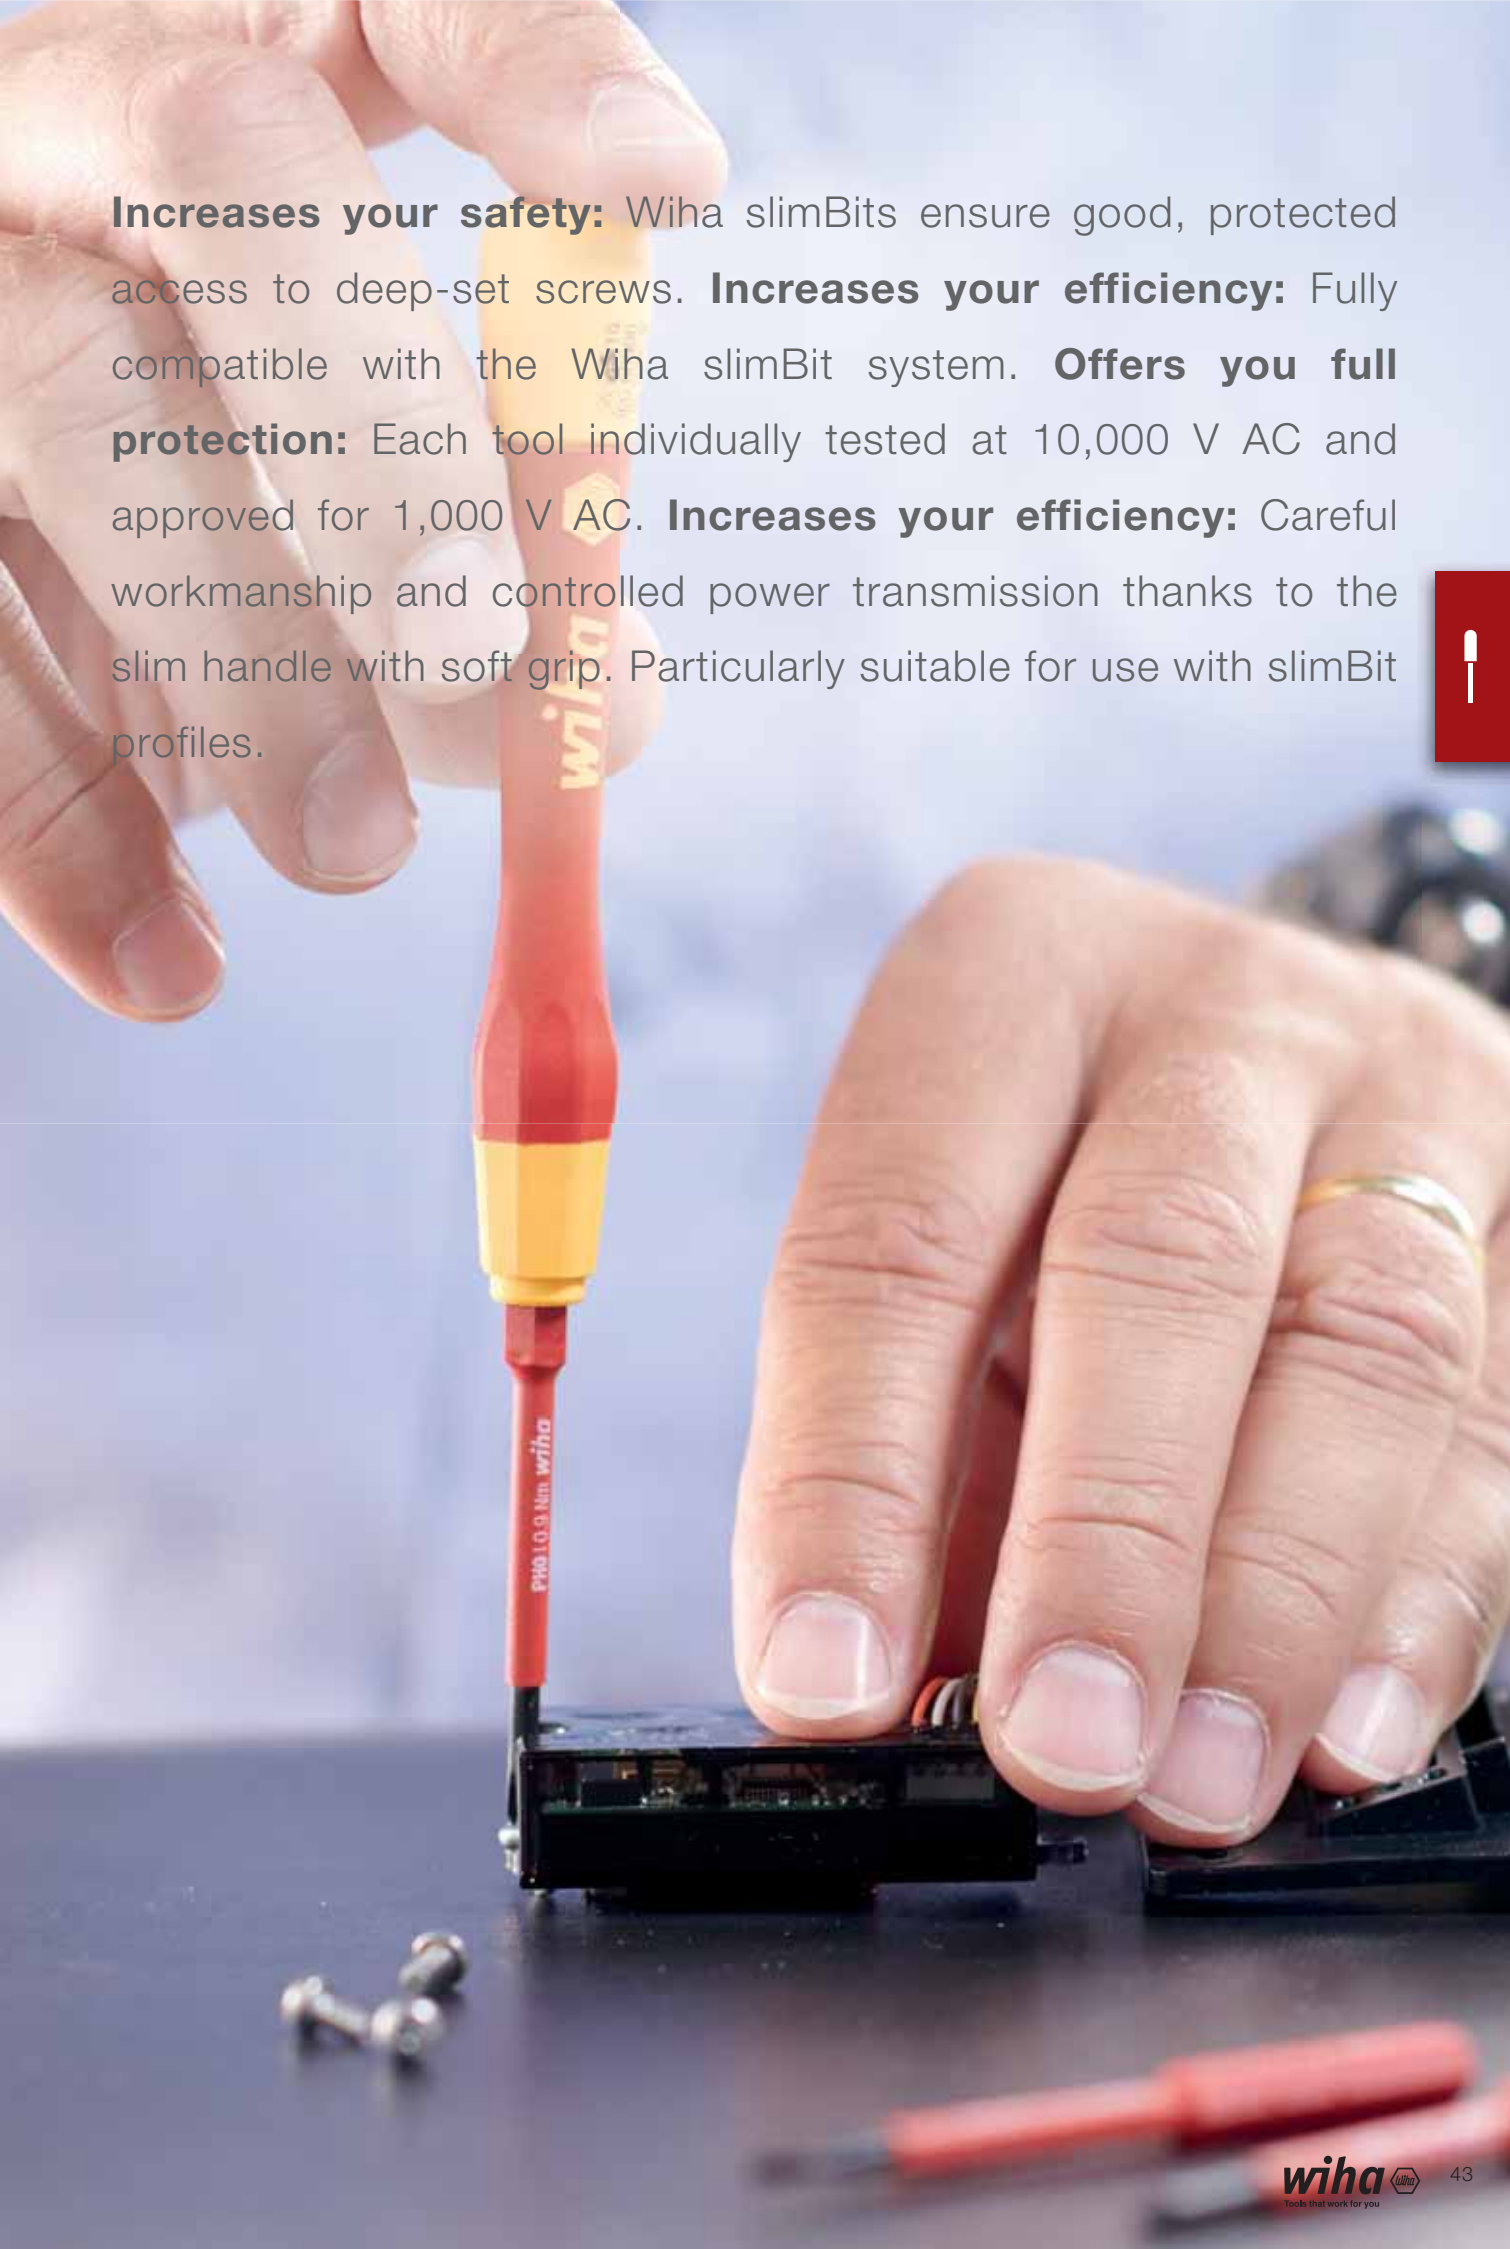

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. **Increases your efficiency:** Fully compatible with the Wiha slimBit system. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your efficiency:** Careful workmanship and controlled power transmission thanks to the slim handle with soft grip. Particularly suitable for use with slimBit profiles.

2831

1000 V
IEC 60900

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. **Increases your efficiency:** Fully compatible with the Wiha slimBit system. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your efficiency:** Careful workmanship and controlled power transmission thanks to the slim handle with soft grip. Particularly suitable for use with slimBit profiles.

Fine screwdriver set PicoFinish®
slimVario® electric
4-pcs. with slimBits
Order-No. 43167
More information: Page 167

Combination profiles

PlusMinus.

The special PlusMinus/Pozidriv profile is ideal for PlusMinus terminal screws.

The combination profile reduces slipping out and guarantees a higher torque transmission.

2270P K6

1000 V
IEC 60900

Simplifies your work: Sensitive working due to slim handle and rotating cap. With a practical plastic holder to hang up or stand on a surface. **Increases your efficiency:** Screwdriver handle size concept for optimal balance between precision and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Fine screwdriver set PicoFinish electric Slotted, Phillips, 6 pcs. with holder
Order-No. 42989
More information: Page 168

Product video:

The perfect complement:

Screwdriver with interchangeable blade set SYSTEM 4
Order-No. 00610
More information: Page 225

PicoFinish electric

Wiha PicoFinish electric: The VDE-GS tested precision screwdriver.

The smooth-running turn-cap enables fast turning.

Imprint with the screw symbol and sizes eases recognition.

Protect your health: With the patented SoftFinish® handle design, doctors and therapists at German Campaign for Healthier Backs. for optimum balance of torque and control.

ensuring work is kind to hands and muscles. Recommended by

Increases your efficiency: Unique Wiha handle-length concept

Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Screwdriver set SoftFinish® assorted 12-pcs.
Order-No. 41002
More information: Page 175

Product video:

The perfect complement:

Magnetiser
Order-No. 01508
More information: Page 186

Wiha SoftFinish® screwdriver

The convenient expert for dry applications.

The SoftFinish handle provides optimal grip for dry applications in trade and industry.

The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

2831

1000 V IEC 60900

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. **Makes handling easier:** Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits – easily taken directly from the belt. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

slimBit electric bit set
TORX®, TORX PLUS®, 12-pcs.
in SlimBit box
Order-No. 43161
More information: Page 198

wiha

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. **Makes handling easier:** Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits – easily taken directly from the belt. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Meets your requirements: Standard drives and dimensions neatly stored away in a kit. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Screwdriver set SoftFinish®
Slotted, Phillips 6-pcs.
Order-No. 07152
More information: Page 175

Product video:

The perfect complement:

Magnetiser
Order-No. 01508
More information: Page 186

Simplifies your work: Striking cap integrated into the handle allows you to strike and lift with the screwdriver. **Makes handling easier:** Easy loosening of tight screws thanks to hex bolster for spanners. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Screwdriver set SoftFinish®
Slotted, Phillips hexagonal blade and solid steel cap, 6-pcs.
Order-No. 21250
More information: Page 176

Product video:

The perfect complement:

Electrician's hammer
Order-No. 42071
More information: Page 334

Solid steel cap and hexagon head

The solid steel cap at the end of the screwdriver handle enables targeted hammering, e.g. to loosen jammed screws.

The direct connection of the solid steel cap to the blade means that the impact energy is transmitted without any loss.

Blade includes a hexagon bolster for using a set of spanners for additional torque.

5533

Simplifies your work: Striking cap integrated into the handle allows you to strike and lift with the screwdriver. **Increases your safety:** Anti-slip handle simplifies work in oily and wet application areas. **Makes handling easier:** Easy loosening of tight screws thanks to hex bolster for spanners. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

Screwdriver set MicroFinish®
Slotted, Phillips with one-piece hexagonal blade and solid steel cap, 5-pcs.
Order-No. 29138
More information: Page 187

Product video:

The perfect complement:

Pliers set Professional
Order-No. 26854
More information: Page 300

Wiha MicroFinish screwdriver

The specialist for wet and oily applications.

Due to the micro-fine surface structure of the screwdriver handle, the user can gain an optimal hold, even with oily or wet hands.

The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

302ESD

Lowers your costs: Electrostatically conductive tools protect electronic components from damage. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Screwdriver handle size concept for optimal balance between precision and control.

Screwdriver set SoftFinish® ESD
Slotted, Phillips 5-pcs.
Order-No. 27252
More information: Page 188

Product video:

The perfect complement:

Pliers set Professional ESD
Order-No. 33507
More information: Page 316

PicoFinish

Wiha PicoFinish precision screwdriver

The comfortable precision screwdriver for fine and delicate fastenings.

The smooth-running turn-cap enables fast turning.

Imprint with the screw symbol and sizes eases recognition.

270P

Simplifies your work: With a practical plastic holder to hang up or stand on a surface. **Lowers your costs:** Electrostatically conductive tools protect electronic components from damage. **Makes handling easier:** Extra-long rotating cap ensures optimum feed. **Increases your efficiency:** Screwdriver handle size concept for optimal balance between precision and control. Careful workmanship and controlled power transmission thanks to the slim handle with soft grip.

Fine screwdriver set PicoFinish® ESD
Slotted, Phillips, 6 pcs. with holder
Order-No. 43707
More information: Page 189

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.

ESD tools meet the ESD Standard IEC 61340-5-1.

ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

2872 T18

Meets your requirements: A variably settable torque covers a large application area. **Simplifies your work:** All tools securely arranged in a robust, orderly bag. **Lowers your costs:** The correct torque protects you from warranty claims. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Torque screwdriver set TorqueVario®-S electric
Mixed, variably adjustable torque limit, 18 pcs. in folding bag
Order-No. 36791
More information: Page 194

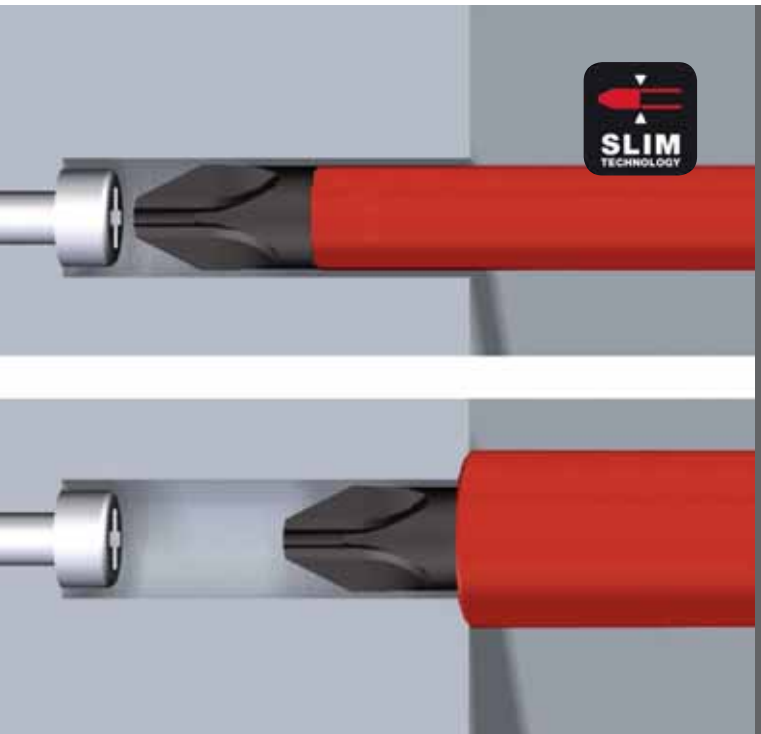

slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

Unlimited access.

Blades up to 33 % narrower due to integrated insulation.

Tool for spring clips (wedge-profiled output geometry).

Meets your requirements: A variably settable torque covers a arranged in a robust, orderly bag. **Lowers your costs:** The correct Wiha slimBits ensure good, protected access to deep-set screws. ensuring work is kind to hands and muscles. Recommended by **Increases your efficiency:** The correct torque avoids damaging **protection:** Each tool individually tested at 10,000 V AC and

large application area. **Simplifies your work:** All tools securely torque protects you from warranty claims. **Increases your safety: Protect your health:** With the patented SoftFinish® handle design, doctors and therapists at German Campaign for Healthier Backs. material and no follow-up work is necessary. **Offers you full** approved for 1,000 V AC.

2933

Meets your requirements: A variably settable torque covers a large application area. **Lowers your costs:** The correct torque protects you from warranty claims. **Makes handling easier:** Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary. **Offers you full protection:** Torque blades tested at 10,000 V AC and approved for 1,000 V AC.

Torque screwdriver with T-handle
TorqueVario®-S T electric
Variable torque limit settings
Order-No. 43177
More information: Page 200

Meets your requirements: A variably settable torque covers a large application area. **Lowers your costs:** The correct torque protects you from warranty claims. **Makes handling easier:** Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary. **Offers you full protection:** Torque blades tested at 10,000 V AC and approved for 1,000 V AC.

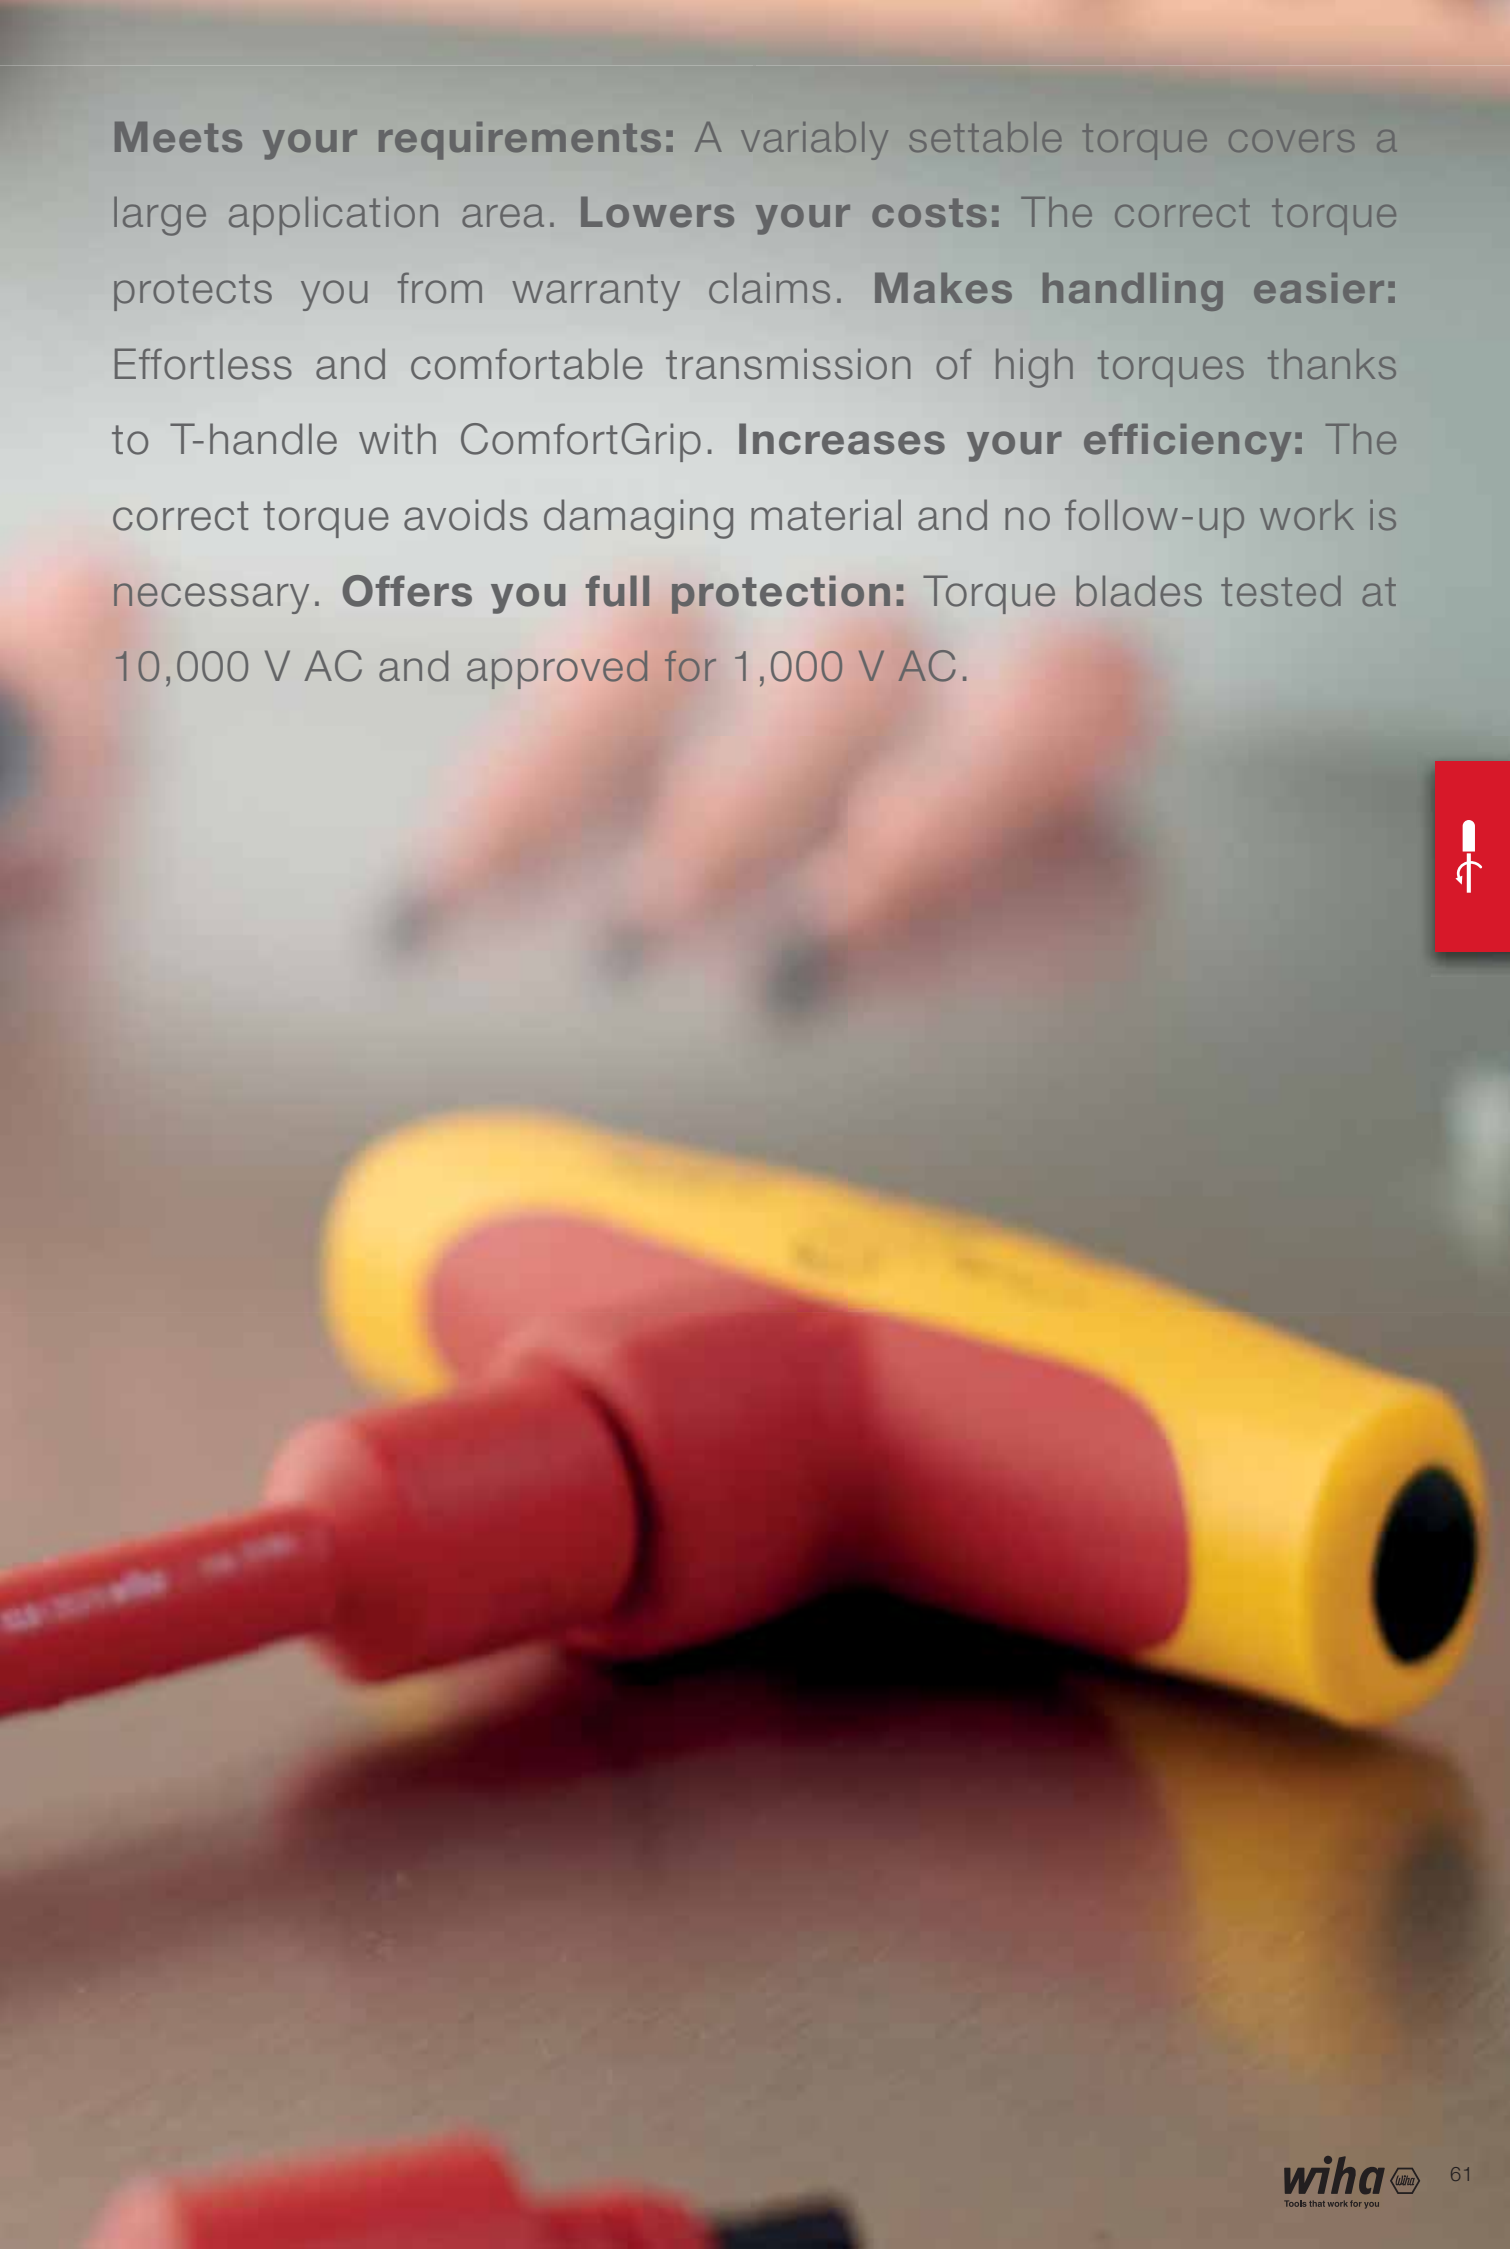

Meets your requirements: A variably settable torque covers a protects you from warranty claims. **Increases your efficiency:** work is necessary. **Increases your productivity:** Utmost process calibration alarm.

large application area. **Lowers your costs:** The correct torque
The correct torque avoids damaging material and no follow-up
safety thanks to integrated ClickControl counting function and

28352

Meets your requirements: A variably settable torque covers a large application area. **Lowers your costs:** The correct torque protects you from warranty claims. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary. **Increases your productivity:** Utmost process safety thanks to integrated ClickControl counting function and calibration alarm.

Torque screwdriver iTorque® with digital scale
Order-No. 36886
More information: Page 201

Product video:

The perfect complement:

L-key set in ErgoStar holder
Order-No. 37351
More information: Page 231

iTorque

The intelligent torque tool.

- Required torque can be adjusted and set on the handle without the need for a separate tool.
- Large numerical display simplifies reading.
- ClickControl records every use and optimises the monitoring of measuring instruments.
- Calibration alarm after 5,000 applications for absolute process safety.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.
- Units can be switched (Nm » in.lb/ cNm » in.oz)
- Can be recalibrated

2852 S10

Meets your requirements: A variably settable torque covers a large application area. **Simplifies your work:** All tools securely arranged in a robust and clearly laid out box. **Lowers your costs:** The correct torque protects you from warranty claims. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary.

Torque screwdriver set TorqueVario®-S mixed, 13 pcs., variably adjustable torque limit, 0.8–5.0 Nm in box
Order-No. 26893
More information: Page 202

Product video:

The perfect complement:

Torque QuickCheck torque testing device
Order-No. 42086
More information: Page 161

2893 S01

Meets your requirements: A variably settable torque covers a large application area. **Simplifies your work:** All tools securely arranged in a robust, orderly bag. **Lowers your costs:** The correct torque protects you from warranty claims. **Makes handling easier:** Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary.

Torque screwdriver with T-handle set TorqueVario®-S T
mixed, 11 pcs., variably adjustable torque limit, 5–14 Nm in box
Order-No. 29234
More information: Page 206

The perfect complement:

XLSelector T bit set, 25 mm
Order-No. 41830
More information: Page 258

TorqueVario®-S

Variably settable torque tools.

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the torque setter adjusting tool.
- Distinctly audible and perceptible click signal when set toque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.

2882 S10

Meets your requirements: A variably settable torque covers a large application area. **Simplifies your work:** All tools securely arranged in a robust, orderly bag. **Lowers your costs:** Electrostatically conductive tools protect electronic components from damage. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary.

Torque screwdriver set TorqueVario®-S ESD
mixed, 13 pcs., variably adjustable torque limit, 0,4-1,0 Nm in box
Order-No. 43898
More information: Page 209

The perfect complement:

Pliers set Professional ESD
Order-No. 33507
More information: Page 316

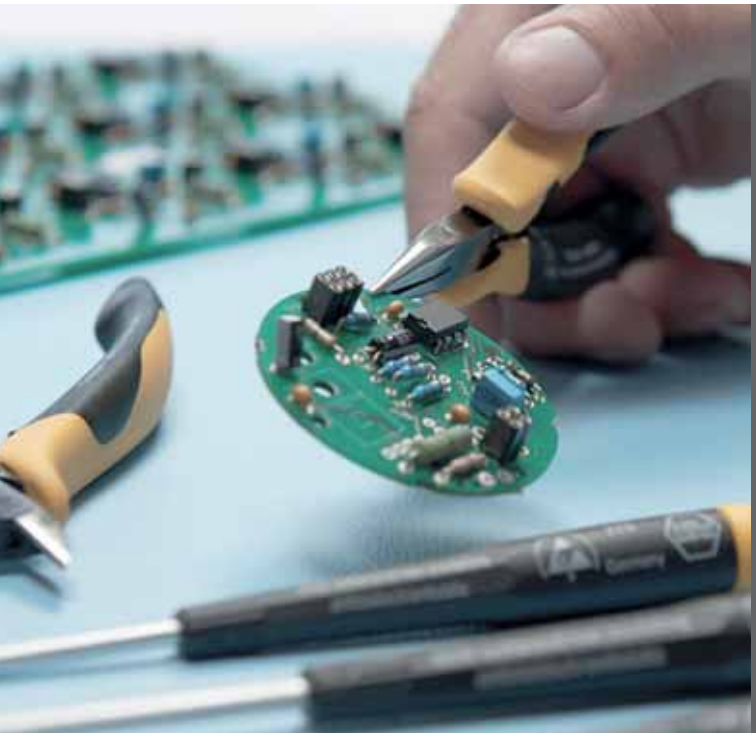

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.

ESD tools meet the ESD Standard IEC 61340-5-1.

ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Increases your safety: Wiha slimBits ensure good, protected injury, all blades stowed safely inside the handle. **Increases your** weight for 100 % efficiency. **Offers you full protection:** Each tool

access to deep-set screws. **Protect your health:** No risk of **efficiency:** Wiha LiftUp electric saves 75% volume and 50% less individually tested at 10,000 V AC and approved for 1,000 V AC.

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. **Protect your health:** No risk of injury, all blades stowed safely inside the handle. **Increases your efficiency:** Wiha LiftUp electric saves 75% volume and 50% less weight for 100 % efficiency. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Screwdriver with bit magazine LiftUp electric
Pozidriv, PlusMinus/Pozidriv, slotted
with 6 slimBits
Order-No. 41234
More information: Page 214

Product video:

slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

Unlimited access.

Blades up to 33 % narrower due to integrated insulation.

Tool for spring clips (wedge-profiled output geometry).

380304

Simplifies your work: Larger handle – maximum power. **Lowers your costs:** 26 tools in one. **Saves time:** Searching? Never again - the most common bits in one tool. **Increases your efficiency:** 90% less volume, 85% less weight - 100% efficiency!

Screwdriver with bit magazine, LiftUp 26one®
Mixed with 13 double bits in blister pack
1/4"
Order-No. 43895
More information: Page 214

Product video:

The perfect complement:

Professional BiCut® high-performance diagonal cutters with DynamicJoint®
Order-No. 38190
More information: Page 301

Simplifies your work: Larger handle – maximum power. **Lowers** - the most common bits in one tool. **Increases your efficiency:**

your costs: 26 tools in one. **Saves time:** Searching? Never again

90% less volume, 85% less weight - 100% efficiency!

3801

Saves space: Six tools in one. **Increases your efficiency:** Good access to confined spaces due to extremely short screwdriver handle.

Screwdriver with bit magazine magnetic
Slotted, Phillips with 6 bits, Stubby, 1/4"
Order-No. 33736
More information: Page 216

Product video:

The perfect complement:

Screwdriver with bit holder set electric slimVario®
Order-No. 41230
More information: Page 167

351P

Simplifies your work: The variable handle position guarantees power fastenings as well as fast fastenings. **Saves time:** Thanks to its simple operation, the desired drive can be used quickly. **Increases your efficiency:** The most common drives cleverly organized in one tool.

Multitool PocketStar assorted 9-pcs.
Order-No. 25293
More information: Page 217

Product video:

The perfect complement:

L-key set in ErgoStar holder
Order-No. 37351
More information: Page 231

PocketStar

The Multitool that fits in your pocket

- Simple and easy selection of the desired key size at the touch of a button.
- Can be used as a screwdriver long handle and T-handle.
- 270° limit for safe work prevents trapped fingers.
- Covered ends on both pivot axes prevent clothing from being caught.

24601

Saves space: The gripper is the ideal space- and weight-saving alternative to a nut driver insert in mobile use. **Increases your efficiency:** The multifunctional gripper adapts to fit every bolt or screw with outer profile.

Nut driver insert gripper 3/8" in blister pack
Order-No. 20554
More information: Page 220

Product video:

The perfect complement:

Pliers set Professional
Order-No. 26854
More information: Page 300

284T

Simplifies your work: Blade length is adjustable from 42-114 mm. **Makes handling easier:** Easy operation of the locking and unlocking button. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Compact fastening tool System 6 with comprehensive, interchangeable blade selection.

Screwdriver with interchangeable blade set SYSTEM 6
Mixed 11-pcs. in roll-up bag
Order-No. 03591
More information: Page 221

Product video:

The perfect complement:

Screwdriver with interchangeable blade set SYSTEM 6
Order-No. 27713
More information: Page 222

SYSTEM 6

Screwdriver with interchangeable blades

- Flexible, versatile interchangeable blade system in industrial quality.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Desired blade length can be set (42 – 114 mm)
- Release sleeve: Blade is held in place

Screwdriver with interchangeable blade set SYSTEM 4 ESD

269TESD

Simplifies your work: Blade length is adjustable from 18-90 mm. **Lowers your costs:** Electrostatically conductive tools protect electronic components from damage. **Makes handling easier:** Easy operation of the locking and unlocking button. **Protect your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Compact precision fastening tool System 4 with comprehensive, interchangeable blade selection.

Screwdriver with interchangeable blade set SYSTEM 4 ESD
Mixed 11-pcs. in roll-up bag
Order-No. 31499
More information: Page 227

The perfect complement:

Pliers set Professional ESD
Order-No. 33507
More information: Page 316

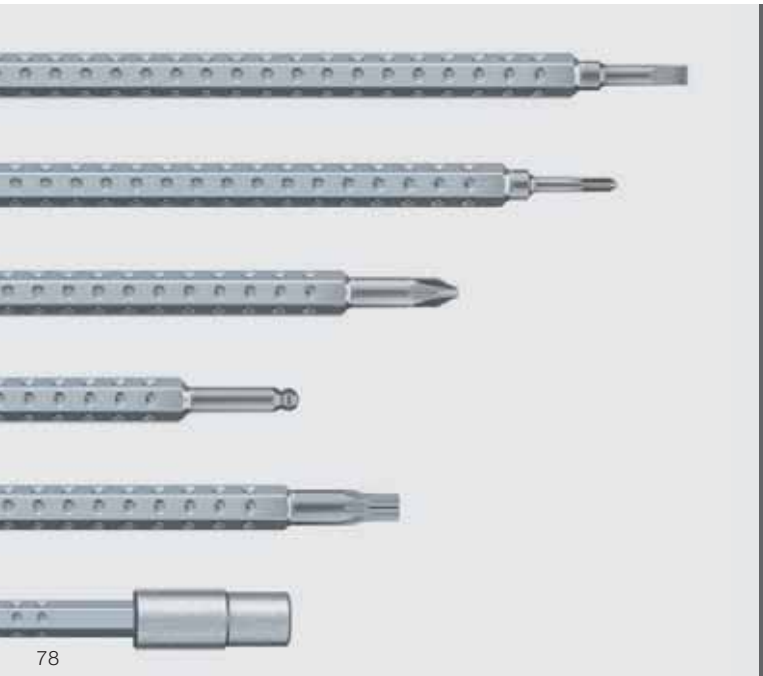

SYSTEM 4

Screwdriver with interchangeable blades

Flexible, versatile precision interchangeable blade system for delicate fastening tasks.

Suitable for all applications: the blades can be quickly combined, extended and exchanged.

Press sleeve: Blade lock is released

Press and hold sleeve: Desired blade length can be set (18 – 90 mm)

Release sleeve: Blade is held in place

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.

ESD tools meet the ESD Standard IEC 61340-5-1.

ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

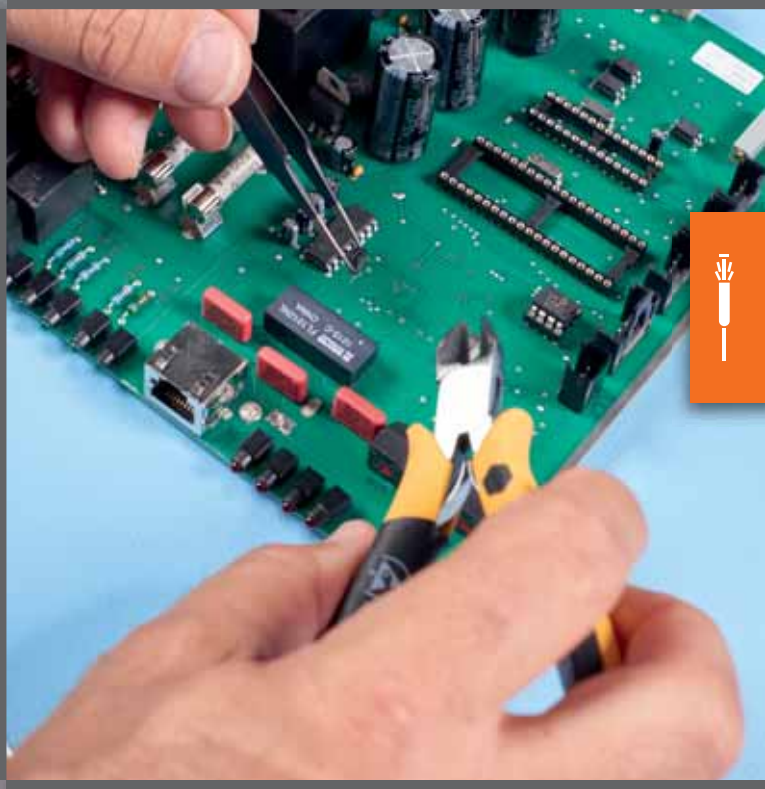

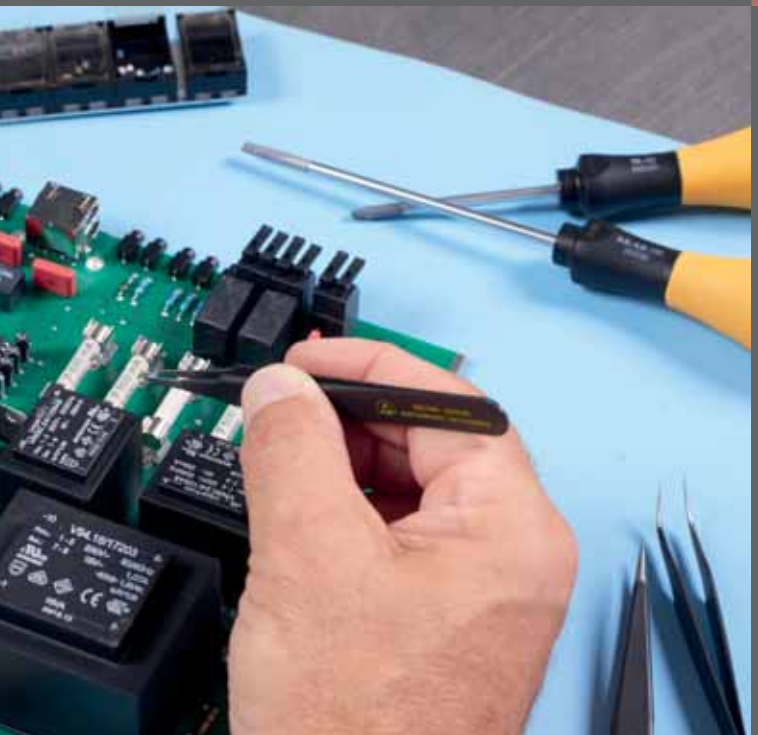

Simplifies your work: The ball end facilitates access to screws **costs:** Reduces the risk of forgetting and leaving keys inside a the right key in the right place with the ErgoStar holder. **Saves** is child's play. **Increases your efficiency:** Coloured L-keys quick paint visible in UV light. The required key width can be quickly holds all hex screws in place without a magnet.

and allows you to work at an angle of up to 25°. **Lowers your** machine and causing damage. **Makes handling easier:** Always **time:** Ensures order: removing and targeted insertion in the holder and easy to find – also in dark environments thanks to fluorescent found thanks to colour coding. Wiha MagicRing® holding feature

L-key set in ErgoStar holder

SB369RF

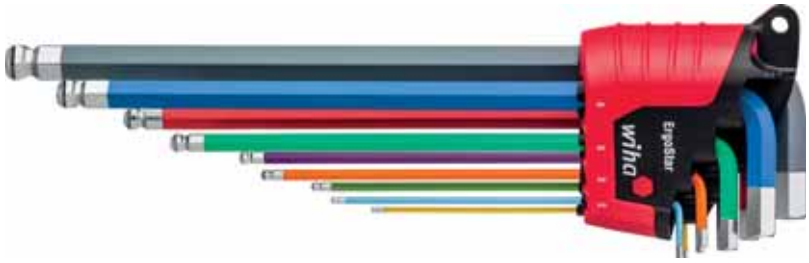

Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. **Lowers your costs:** Reduces the risk of forgetting and leaving keys inside a machine and causing damage. **Makes handling easier:** Always the right key in the right place with the ErgoStar holder. **Saves time:** Ensures order: removing and targeted insertion in the holder is child's play. **Increases your efficiency:** Coloured L-keys quick and easy to find – also in dark environments thanks to fluorescent paint visible in UV light. The required key width can be quickly found thanks to colour coding. Wiha MagicRing® holding feature holds all hex screws in place without a magnet.

L-key set in ErgoStar holder
hexagonal ball end, 9-pcs. in
fluorescent colour in blister pack
Order-No. 43851
More information: Page 230

Product video:

SB 369R H9

Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. **Lowers your costs:** Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. **Makes handling easier:** Always the correct key when you need it. **Saves time:** Ensures order: removing and targeted insertion in the holder is child's play. **Increases your efficiency:** Wiha MagicRing® holding feature holds all hex screws in place without a magnet.

L-key set in ErgoStar holder Hexagonal ball end MagicRing®, 9-pcs., matt chrome-plated in blister pack
Order-No. 43850
More information: Page 231

Product video:

The perfect complement:

Torque screwdriver set TorqueVario®-S
Order-No. 26893
More information: Page 202

SB 369T S9

Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. **Makes handling easier:** Sliding function for one-handed opening of the holder and simple, quick removal. **Protect your health:** Reduction of the risk of injury by increasing the hand working space. **Increases your efficiency:** Improved accessibility thanks to its short side.

L-key set in ProStar holder
Matt chrome-plated hexagonal ball end with short shaft, 9-pcs. in blister pack
Order-No. 35481
More information: Page 232

Product video:

The perfect complement:

Screwdriver set SoftFinish®
Order-No. 41002
More information: Page 175

L-key with short shaft

Especially for hard-to-reach screws and confined spaces

Improved accessibility thanks to a 60% reduction in length of the short L-key side.

Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key.

Ball end geometry enables fastening at an angle of up to 25°.

SB 366R HZ13

Makes handling easier: Always the correct key when you need it. **Saves time:** Ensures order: removing and targeted insertion in the holder is child's play. **Increases your efficiency:** Wiha MagicSpring® holding feature holds all Torx® screws in place without a magnet.

L-key set in ErgoStar holder TORX® MagicSpring®, 13-pcs. in blister pack, black oxidised
Order-No. 43848
More information: Page 235

Product video:

The perfect complement:

Pliers set Classic with MagicTips®
Order-No. 34708
More information: Page 301

ErgoStar

The right L-key after just one turn.

One turn of any L-key and all L-keys are ready for removal.

Solid stopping point for fixing L-keys in the holder.

Innovative clamping ensures L-keys are held firmly in both a closed and open position.

Compact design saves space on the work bench or in the toolbox.

Simplifies your work: Effortless and comfortable transmission

your costs: Highly durable thanks to high-quality, chrome-plated

Integrated side drive for effortless fastening and unfastening of

of high torques thanks to T-handle with ComfortGrip. **Lowers** L-key surface to prevent corrosion. **Increases your efficiency:** rusted or stubborn screws.

334DS

Simplifies your work: Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. **Lowers your costs:** Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. **Increases your efficiency:** Integrated side drive for effortless fastening and unfastening of rusted or stubborn screws.

L-key with T-handle set ComfortGrip Hexagon with side drive, matt chrome-plated 6-pcs.
Order-No. 26247
More information: Page 239

Product video:

364DS

Simplifies your work: Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. **Lowers your costs:** Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. **Increases your efficiency:** Integrated side drive for effortless fastening and unfastening of rusted or stubborn screws.

L-key with T-handle set ComfortGrip TORX® with side drive, matt chrome-plated 6-pcs.
Order-No. 26248
More information: Page 239

The perfect complement:

Pliers set Classic
Order-No. 26850
More information: Page 300

Lowers your costs: Bit quick and easy to find thanks to yellow **time:** No long searches thanks to fluorescent bit, infrequent bit thanks to clear organisation and automatic opening at the push 120x greater lifespan* thanks to optimised bit for Y-shaped

marking – even in dark environments by using an UV light. **Saves** replacement thanks to long lifespan. Simple and rapid bit removal of a button. **Increases your efficiency:** The specialist with screws(*compared to Wiha standard bit)

SB 7947-Y904

Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. **Increases your efficiency:** The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit)

FlipSelector Y bit set, 25 mm Phillips, Pozidriv, TORX®, 13-pcs., 1/4"
Order-No. 41827
More information: Page 261

More information:

The perfect complement:

XLSelector T bit set, 50 mm
Order-No. 41831
More information: Page 258

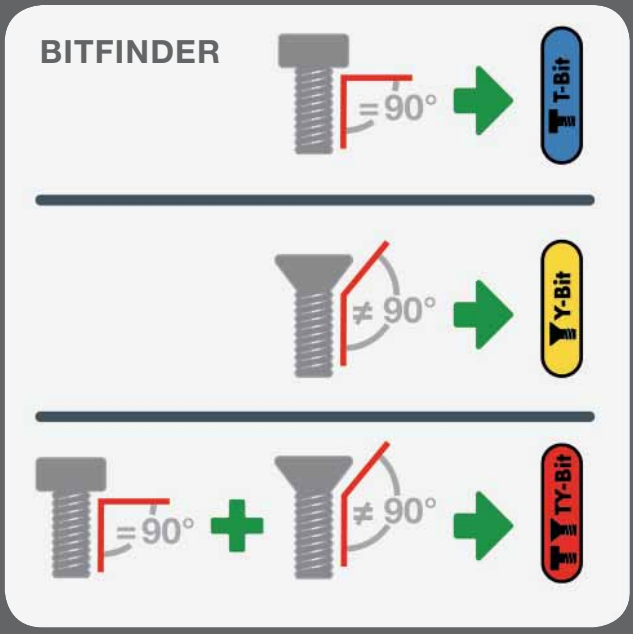

SB 7948-Y950

Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. **Increases your efficiency:** The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit)

XLSelector Y bit set, 50 mm
Phillips, Pozidriv, TORX®, 13-pcs., 1/4"
Order-No. 41834
More information: Page 260

More information:

The perfect complement:

Bit holder CentroFix Super Slim mechanically lockable
Order-No. 39134
More information: Page 280

Wiha TY bit concept

Bits quickly and easily selected thanks to the screw head shape.

The T bit is ideal for fastening T-shaped screws with an angle of 90°.

The Y bit is ideal for fastening Y-shaped screws with an angle not equal to 90°.

Universal in its use, the TY bit is suitable for all types of screws, no matter whether they feature a Y-shaped or T-shaped screw head.

SB 7947-T906

Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. **Increases your efficiency:** The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit)

FlipSelector T bit set, 25 mm Phillips, Pozidriv, TORX®, 13-pcs., 1/4"
Order-No. 41824
More information: Page 259

More information:

The perfect complement:

Flashlight with LED, laser and UV light
Order-No. 41286
More information: Page 160

XLSelector T bit set, 50 mm

SB 7948-T950

Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. **Increases your efficiency:** The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit)

XLSelector T bit set, 50 mm
Phillips, TORX®, hex 13-pcs. 1/4"
Order-No. 41831
More information: Page 258

More information:

The perfect complement:

Screwdriver with LiftUp 25 magnetic bit magazine
Order-No. 38606
More information: Page 216

SB 7945-TY903

Lowers your costs: Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Automatic opening at the push of a button and simple bit change directly in the holder. **Increases your efficiency:** The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit)

BitBuddy® TY bit set, 29 mm
Phillips, Pozidriv, TORX®, 8-pcs., 1/4"
Order-No. 42137
More information: Page 257

More information:

The perfect complement:

Bit holder CentroFix Force mechanically lockable
Order-No. 39133
More information: Page 280

BitBuddy 29

Easy, single-hand operation.

Attaching:
Bits are directly picked up with the machine from the BitBuddy.

Work:
Gets your fastenings done.

Storing
Bits are easily returned to the BitBuddy, by pressing on the red bit strip.

With magnetic bit holder for a rapid bit change.

BitBuddy is always at hand - easily fits into trouser pockets or onto the belt clip.

SB 7946-TY505

Lowers your costs: Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Automatic opening at the push of a button and simple bit change directly in the holder. **Increases your efficiency:** The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit)

BitBuddy® TY bit set, 49 mm
TORX® 1/4" 7-pcs.
Order-No. 42115
More information: Page 256

More information:

The perfect complement:

L-key set in ErgoStar holder
Order-No. 43851
More information: Page 230

Wiha TY bit concept

Bits quickly and easily selected thanks to the screw head shape.

The T bit is ideal for fastening T-shaped screws with an angle of 90°.

The Y bit is ideal for fastening Y-shaped screws with an angle not equal to 90°.

Universal in its use, the TY bit is suitable for all types of screws, no matter whether they feature a Y-shaped or T-shaped screw head.

Simplifies your work: Actuating sleeve recoils to indicate flush magnet, even heavy screws are held securely in place.

fastening. **Increases your safety:** Thanks to the strong ring

7123

Simplifies your work: Actuating sleeve recoils to indicate flush fastening. **Increases your safety:** Thanks to the strong ring magnet, even heavy screws are held securely in place.

Bit holder MagicFlip Force magnetic with ring magnet, 1/4"
Order-No. 36800
More information: Page 280

Product video:

The perfect complement:

Bit holder CentroFix Force mechanically lockable
Order-No. 39133
More information: Page 280

MagicFlip Force

Facilitates the fastening of long wood screws.

Optimal holding force thanks to extremely powerful Neodym ring magnet.

FlipBack: The actuating sleeve automatically springs back during recessing.

Magnet On/Off: The ring magnet can be "deactivated" by pushing the actuating sleeve back.

7148 CF

Saves time: Rapid bit change due to easy-to-operate locking and unlocking of the holder. **Increases your efficiency:** No wobbling and an extremely secure hold thanks to the play-free guidance of bits.

Bit holder CentroFix Force mechanically lockable
1/4", magnetic
Order-No. 39133
More information: Page 280

Product video:

CentroFix Force

Suitable for all bits with 1/4" hex drive style C6.3 and E6.3.

SelfLock: The bit is locked mechanically and held securely when inserted.

EasyOut: When unlocked, the bit moves into the ideal removal position.

7148 CS

Saves time: Automatic bit locking mechanism upon insertion. **Increases your efficiency:** Unlimited access to deep-set screws thanks to extreme slimline design.

Bit holder CentroFix Super Slim mechanically lockable 1/4", magnetic
Order-No. 39134
More information: Page 280

Product video:

CentroFix SuperSlim

Up to 30% reduced outer diameter compared to "conventional" quick release holders.

Improved screw accessibility in confined holes.

SelfLock: The bit is locked mechanically and held securely when inserted.

EasyOut: When unlocked, the bit moves into the ideal removal position.

Drive systems and matching bits

Bit holder	suitable for
CentroFix Force	C 6.3, E 6.3 und 1/4" drives
CentroFix SuperSlim	C 6.3
MagicFlip Force	C 6,3

Simplifies your work: The angled head allows you to work in **costs:** Durable thanks to high-quality, chrome-plated plier surface for three tasks: cutting to length, stripping and skinning. **Increases** less weight for 100% efficiency. **Offers you full protection:** 1,000 V AC.

hard-to-reach places such as installation sockets. **Lowers your** to prevent corrosion. **Saves money:** Now you only need one tool **your efficiency:** Three tools in one. Saves 60% volume and 50% Each tool individually tested at 10,000 V AC and approved for

Z 14 1 06

1000 V
IEC 60900

Simplifies your work: The angled head allows you to work in hard-to-reach places such as installation sockets. **Lowers your costs:** Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Saves money:** Now you only need one tool for three tasks: cutting to length, stripping and skinning. **Increases your efficiency:** Three tools in one. Saves 60% volume and 50% less weight for 100% efficiency. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Installation pliers TriCut Professional electric
Order-No. 38552
More information: Page 287

Product video:

The perfect complement:

Professional BiCut® high-performance diagonal cutters with DynamicJoint®
Order-No. 38191
More information: Page 288

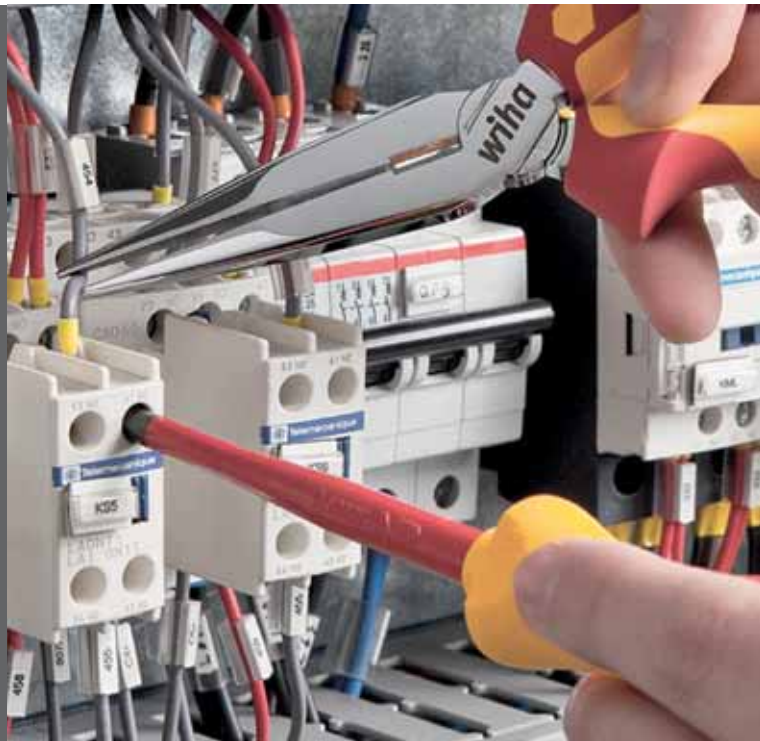

Z 18 0 06

Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Protect your health:** Requires less force and reduces pressure on the wrists. **Increases your efficiency:** Two pliers in one - 200 % power at the touch of a button, available at any time. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

BiCut® Professional electric high-performance diagonal cutters with DynamicJoint®
Switchable
Order-No. 38191
More information: Page 288

Product video:

The perfect complement:

Screwdriver and bit set slimVario® screwdriver
Order-No. 41231
More information: Page 164

VDE-certified tools

Insulated tools are essential for all work on or around live components.

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

The following equipment is required for all work on or around live components and should be appropriate for the specific task
- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.
This is achieved by complying with the five safety rules:
- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

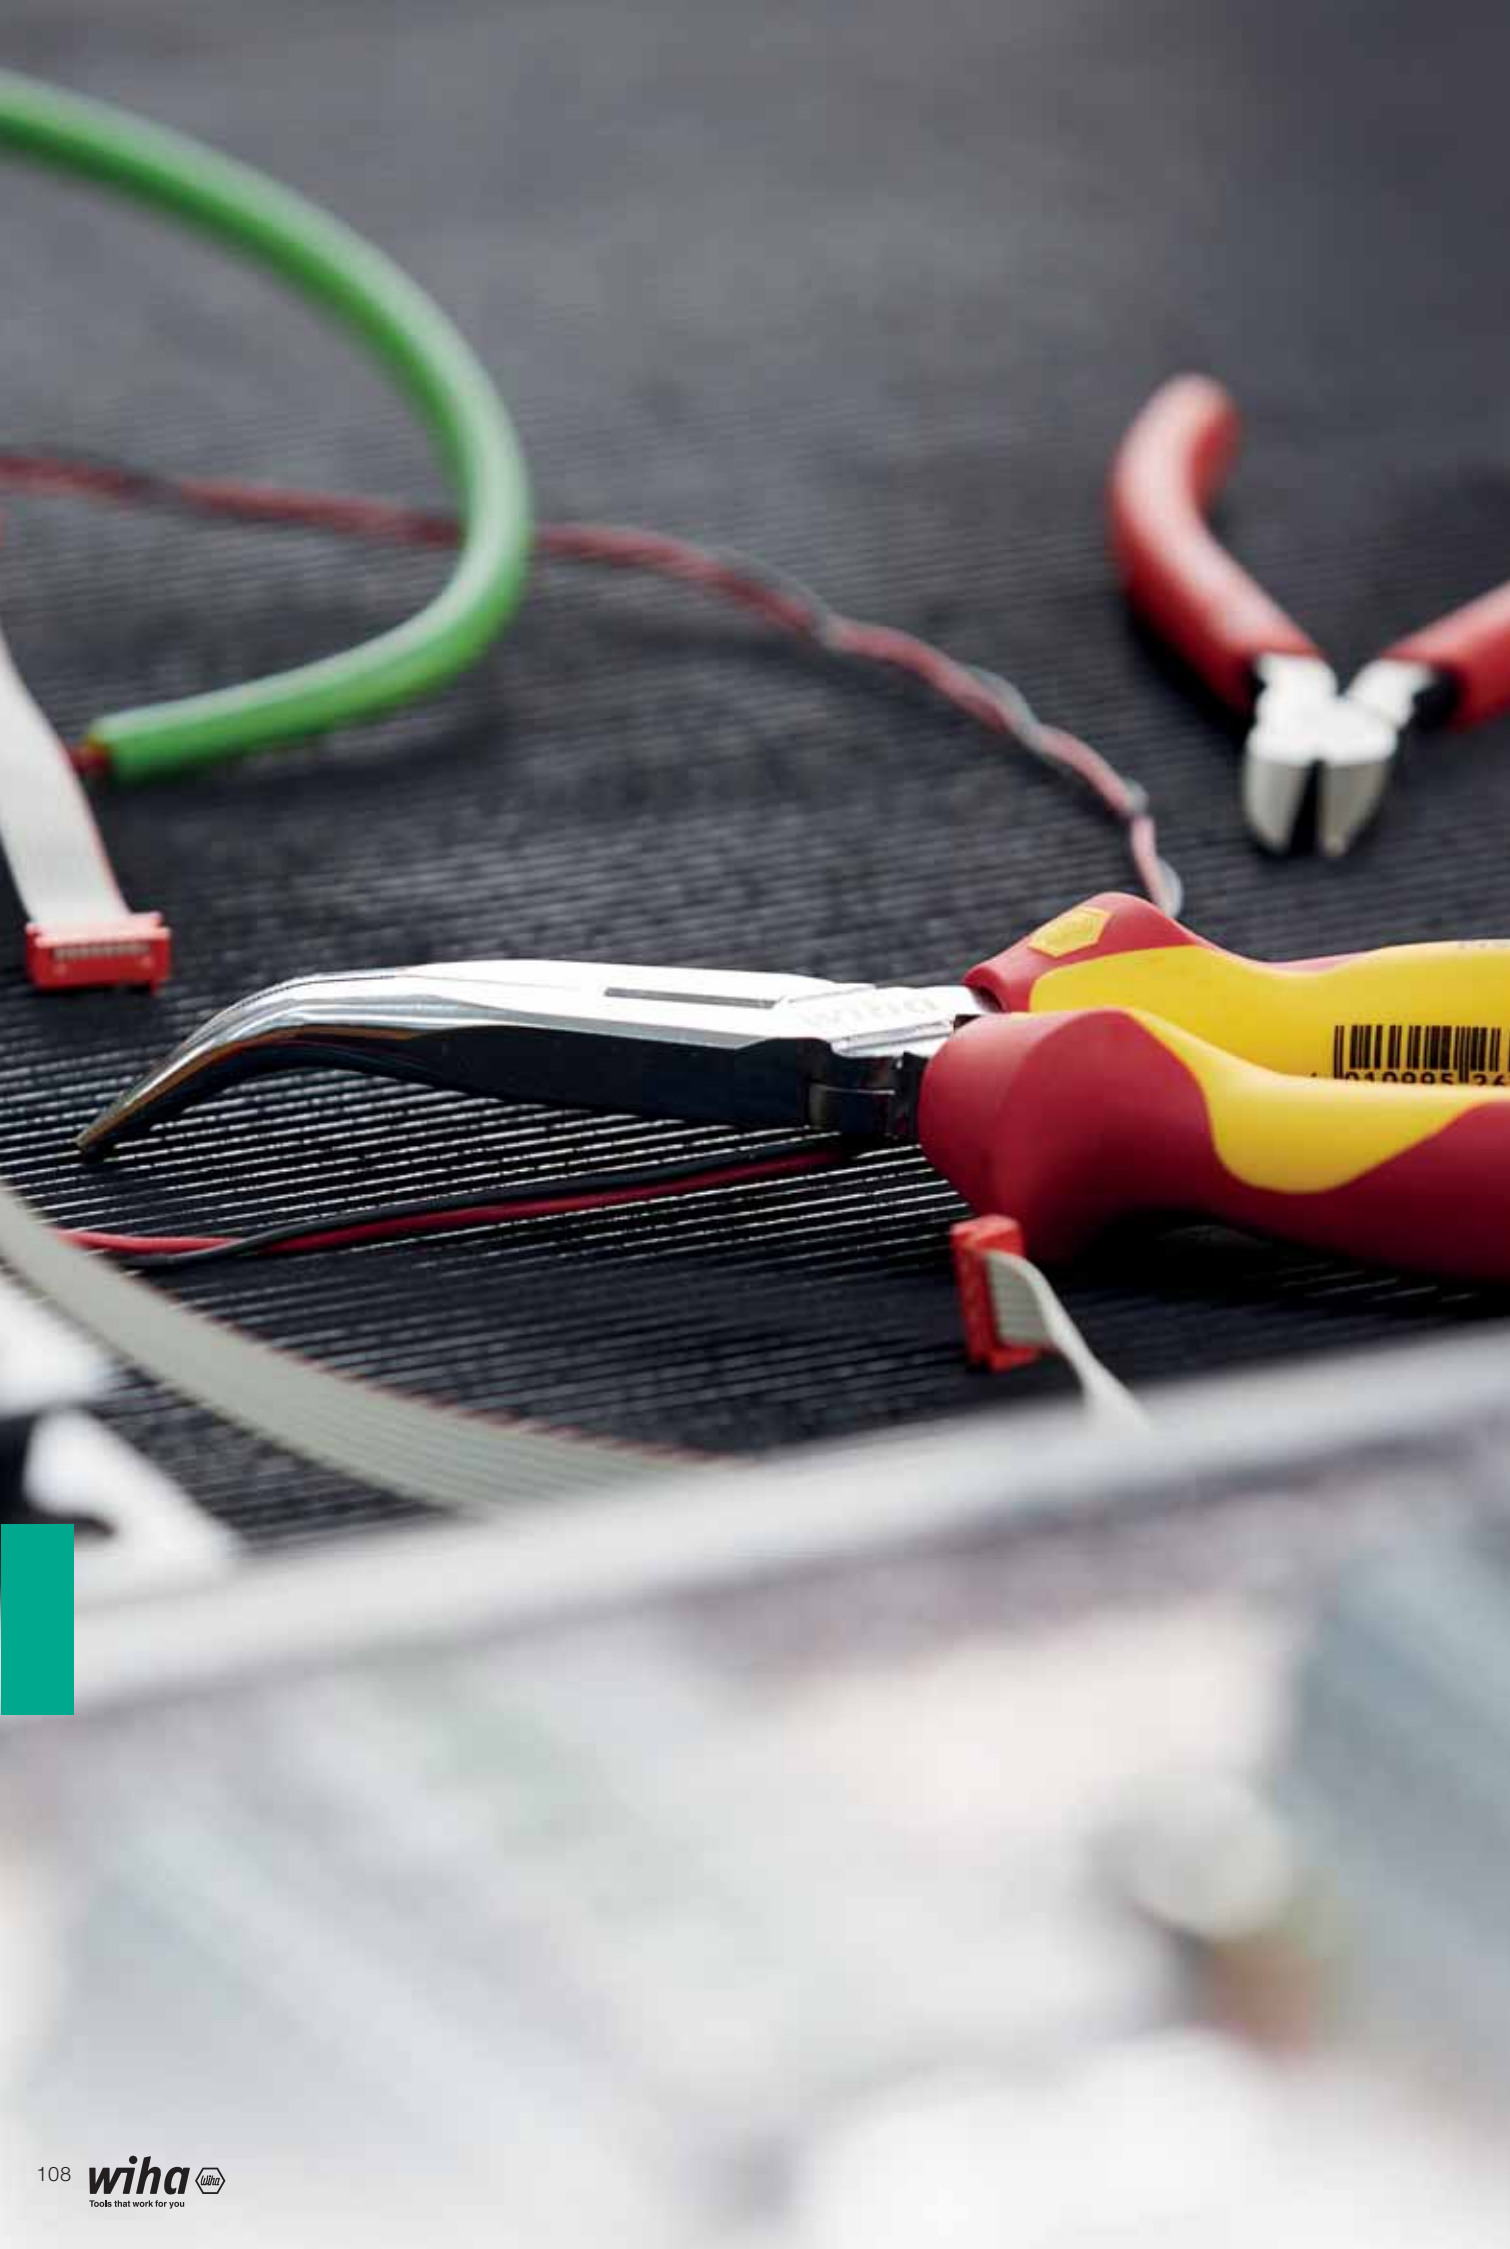

Z 99 0 001 06

Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Increases your safety:** Wiha combination pliers enable safe, non-slip gripping in all work situations. **Protect your health:** Special DynamicJoint® design reduces effort required for cutting. **Increases your efficiency:** Wiha needle nose pliers with extra-long plier head for inserting low-lying components. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Pliers set Professional electric
Combination pliers, needle nose pliers, diagonal cutters 3-pcs.
Order-No. 26852
More information: Page 286

The perfect complement:

Screwdriver set SoftFinish® electric slimFix
Order-No. 41003
More information: Page 165

Lowers your costs: An integrated lever enables users to interrupt

your safety: Safe work through feed aid prevents crimping the

Thanks to hexagonal crimping, small wire-end sleeves no longer

of wire-end sleeve size with suitable crimping force for a large

the crimping process at any time to protect the pliers. **Increases** plastic cover of wire-end sleeves. **Makes handling easier:** get caught. **Increases your efficiency:** Automatic adjustment coverage area of 0.08-16mm².

Z 57 0 06

Lowers your costs: Long-lasting and robust thanks to metal blade insert. **Protect your health:** Damper enclosed for large cable cross-sections to reduce recoil and protect wrists. **Saves time:** Blades quickly exchanged by immediately available replacement blades in the handle. **Increases your efficiency:** Automatic stripping pliers for a wide range of cables between 0.03 and 16 mm².

Stripping tool automatic up to 16 mm² in blister pack
Order-No. 42062
More information: Page 295

Product video:

The perfect complement:

Torque screwdriver set TorqueVario®-S electric
Order-No. 36791
More information: Page 194

Stripping tool, automatic up to 16mm²

These pliers can handle a wide range of cables, thus combining two pairs of pliers in one.

The supplied damper can be used to lessen recoil caused by larger cable gauges, such as those greater than 6 mm², thus helping to protect wrists.

Precise cutting to length thanks to adjustable longitudinal stop.

Integrated hand protection along the cutting edge guards against injury.

Z 62 0 06

Lowers your costs: An integrated lever enables users to interrupt the crimping process at any time to protect the pliers. **Increases your safety:** Safe work through feed aid prevents crimping the plastic cover of wire-end sleeves. **Makes handling easier:** Thanks to hexagonal crimping, small wire-end sleeves no longer get caught. **Increases your efficiency:** Automatic adjustment of wire-end sleeve size with suitable crimping force for a large coverage area of 0.08-16mm².

Automatic crimp tool
for wire-end sleeves hex crimping
Order-No. 41246
More information: Page 298

Product video:

The perfect complement:

Stripping tool automatic
Order-No. 42062
More information: Page 295

Automatic crimp tool

Process-safe hexagonal crimping prevents smaller wire-end sleeves from snagging.

These crimping pliers can handle all standard applications with a crimping range between 0.08 and 16 mm².

Suitable for both single wire-end sleeves and twin wire-end sleeves thanks to automatic crimping.

Simplifies your work: Self-locking at AF 17 and above. Also **Lowers your costs:** Minimises wear and prevents damage to free handling. **Saves space:** Replaces a set of metric and imperial bending tasks take minimum effort thanks to manual force increased with no need to press any buttons. Ratchet function allows users Slender design thanks to button-free setting enables it to be used

suitable for left-handed users as operated without side push button. sensitive surfaces thanks to smooth, parallel jaws and backlash-open-ended spanners. **Protect your health:** Compaction and tenfold. **Saves time:** Safe, rapid setting directly on the work piece to fasten screws instantly with a simple glide. **Improved access:** in confined working environments, minimising the risk of damage.

Z 25 0 01

Simplifies your work: Self-locking at AF 17 and above. Also suitable for left-handed users as operated without side push button. **Lowers your costs:** Minimises wear and prevents damage to sensitive surfaces thanks to smooth, parallel jaws and backlash-free handling. **Saves space:** Replaces a set of metric and imperial open-ended spanners. **Protect your health:** Compaction and bending tasks take minimum effort thanks to manual force increased tenfold. **Saves time:** Safe, rapid setting directly on the work piece with no need to press any buttons. Ratchet function allows users to fasten screws instantly with a simple glide. **Improved access:** Slender design thanks to button-free setting enables it to be used in confined working environments, minimising the risk of damage.

Pliers wrench Classic
Order-No. 40923
More information: Page 308

Product video:

Z 99 0 002 05

Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Increases your safety:** Wiha combination pliers enable safe, non-slip gripping in all work situations. **Makes handling easier:** Wiha QuickFix water pump pliers with simple and rapid opening width setting, especially during constantly changing applications. **Protect your health:** Special DynamicJoint® design reduces effort required for cutting.

Pliers set Professional
High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs.
Order-No. 26854
More information: Page 300

The perfect complement:

Screwdriver set MicroFinish®
Order-No. 29138
More information: Page 187

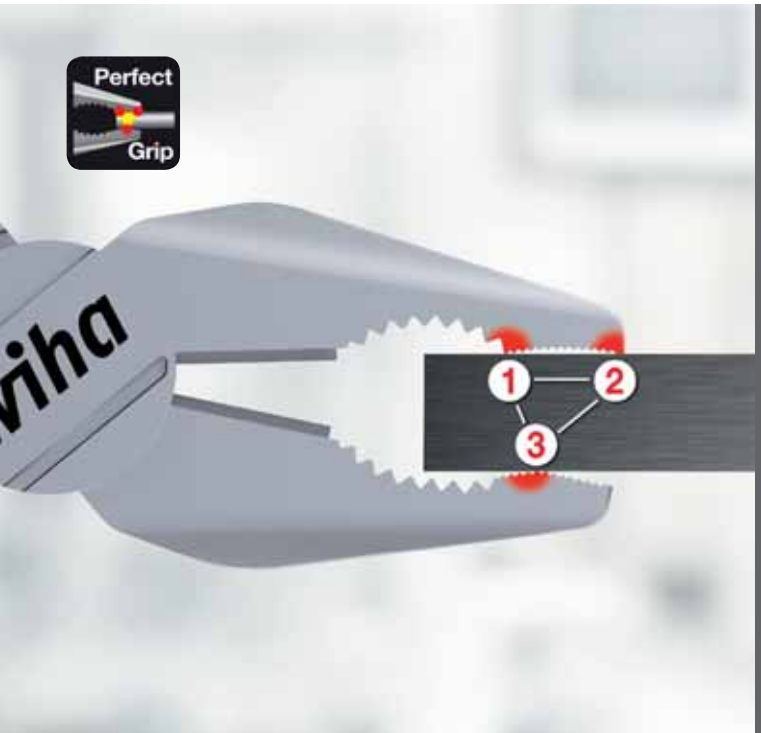

OptiGrip

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.

Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.

A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Z 99 0 007 01

Lowers your costs: Prevents damage caused by lost circlips in the work area. **Saves time:** Safe and sturdy grip on circlips.

Pliers set Classic with MagicTips®
Circlip pliers 4-pcs.
Order-No. 34708
More information: Page 301

Product video:

The perfect complement:

Screwdriver with interchangeable blade set SYSTEM 6
Order-No. 00623
More information: Page 221

MagicTips®

Wiha MagicTips® – Top of their class.

Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.

Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.

Precise: Precision tips of high performance steel for maximum grip and high stability.

Z 18 0 05

Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Protect your health:** Requires less force and reduces pressure on the wrists. **Increases your efficiency:** Two pliers in one - 200 % power at the touch of a button, available at any time.

Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable
Order-No. 38190
More information: Page 301

Product video:

The perfect complement:

Screwdriver set SoftFinish®
Order-No. 41002
More information: Page 175

DynamicJoint®

Wiha DynamicJoint® – A new dimension in strength and durability

Innovative: Optimised joint construction.

Effective: Minimal power loss means less force needed for cutting.

Permanent: Optimal performance even after thousands of cuts.

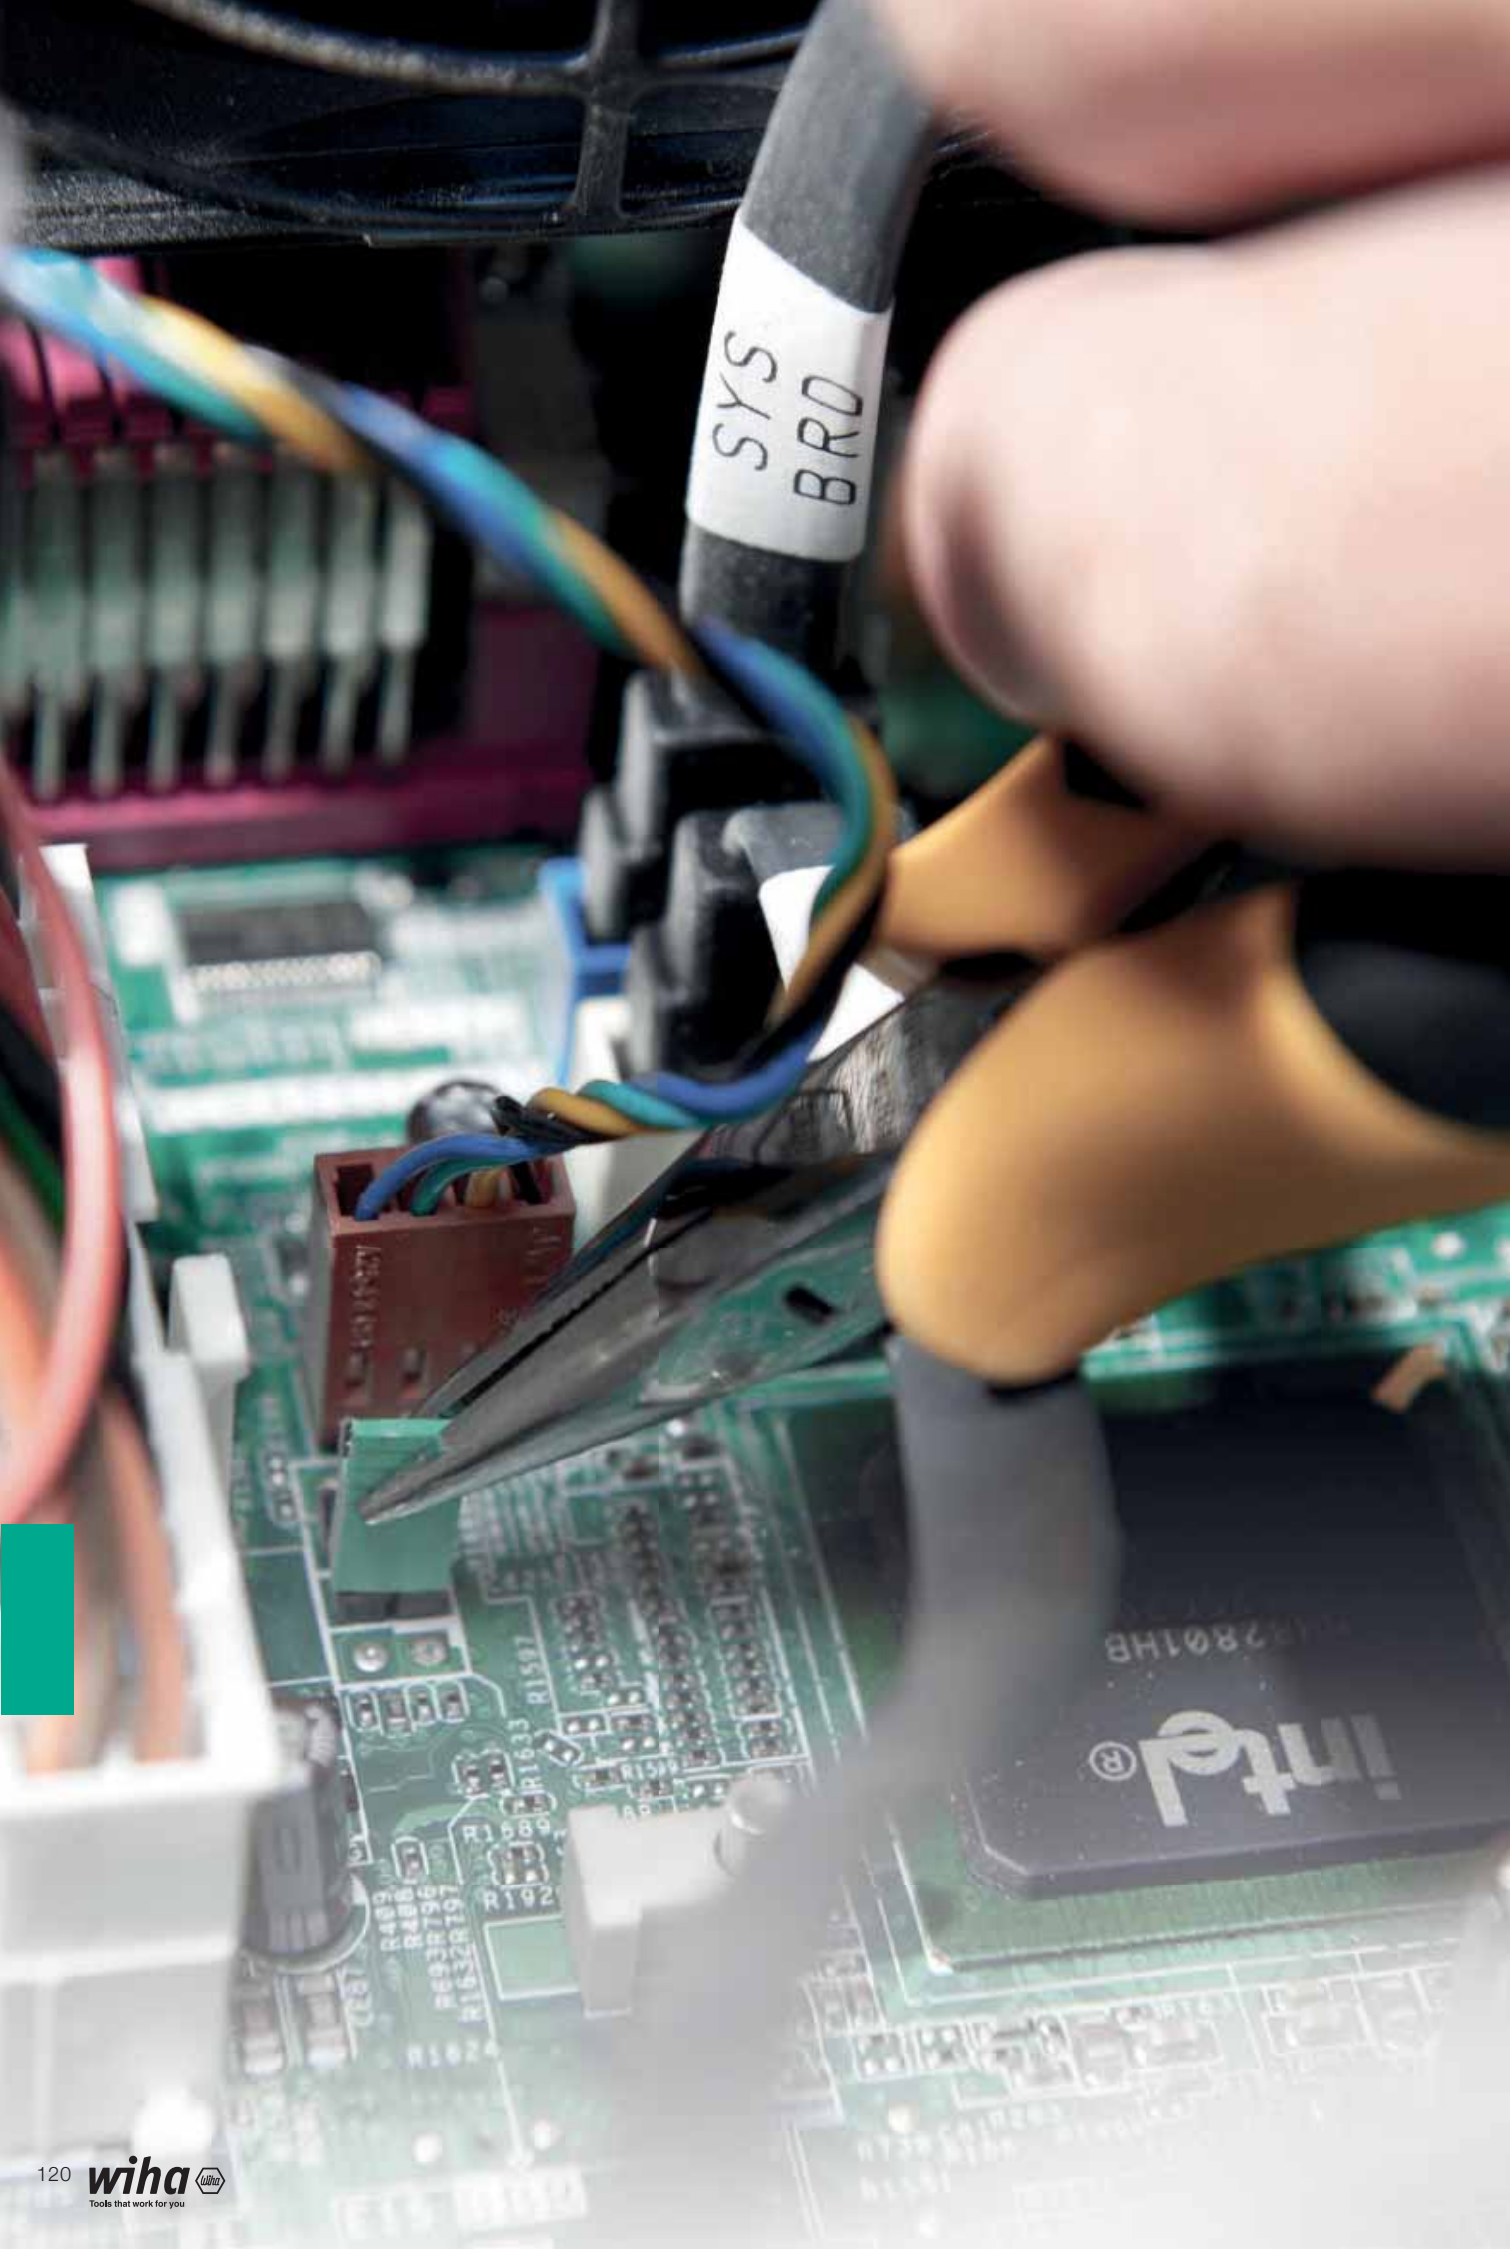
SYS
BRD
intel

Z 99 0 001 04

EPA

Meets your requirements: Universal set for various cutting applications, secure hold and feeding in the electronics sector. **Lowers your costs:** Electrostatically conductive tools protect electronic components from damage.

Pliers set Professional ESD
Diagonal cutters, oblique end cutting nippers, needle nose pliers, 4-pcs. in tool pouch
Order-No. 33507
More information: Page 316

The perfect complement:

Screwdriver handle SoftFinish®-telescopic ESD
Order-No. 31498
More information: Page 227

Simplifies your work: Flat claws allow you to remove nails and nail clamps easily. **Increases your efficiency:** Perfect balance thanks to optimum weight distribution for effective handling. **Improved access:** Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape. **Increases the quality of your work:** The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.

846

Simplifies your work: Flat claws allow you to remove nails and nail clamps easily. **Increases your efficiency:** Perfect balance thanks to optimum weight distribution for effective handling. **Improved access:** Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape. **Increases the quality of your work:** The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.

Electrician's hammer with 300 g hammer head, in blister pack
Order-No. 42071
More information: Page 334

Product video:

The perfect complement:

SoftFinish® dowel racket set with dowels
Order-No. 41289
More information: Page 334

Electrician's hammer

With its optimally uniform weight distribution, this hammer ensures perfect balance, delivering impact and fatigue-free work.

Its flat claws make it easier to remove fastening components such as nail clamps, even from difficult-to-access spots.

Optimum access into corners and confined spaces thanks to U-shaped striking surface.

The flat hammer handle lower surface acts as a soft-faced hammer, ensuring components such as cables and dowels are fixed into position without causing damage.

SB 534S5

Simplifies your work: Dirt- and dust-free work compared to when machines are used. **Increases your safety:** Galvanic separation in the handle prevents a discharge between the striking cap and the blade. **Protect your health:** Dowel hole can be made anywhere using a hammer at any time, even near power sockets. **Saves time:** Hammer dowel holes anywhere at any time without worrying how near you are to wall sockets. **Increases your efficiency:** Scaled impact screwdriver blade provides more detailed depth measurement. Perfectly dimensioned dowel hole thanks to blade adjusted to required size.

SoftFinish® dowel racket set with dowels
Phillips with 6 mm round blade in blister pack, 5-pcs.
Order-No. 41289
More information: Page 334

Product video:

The perfect complement:

Electrician's spirit level
Order-No. 42074
More information: Page 335

SoftFinish® dowel racket set with dowels

- Makes it easier to insert dowels and saves valuable working time.
- Ensures dirt- and dust-free work compared to machines.
- Galvanic separation between the blade and solid steel cap protects against electric shock.
- Perfect for portable use since you can make dowel holes anywhere at any time at the strike of a hammer.

Simplifies your work: Dirt- and dust-free work compared to when the handle prevents a discharge between the striking cap and the using a hammer at any time, even near power sockets. **Saves** how near you are to wall sockets. **Increases your efficiency:** measurement. Perfectly dimensioned dowel hole thanks to blade

machines are used. **Increases your safety:** Galvanic separation in blade. **Protect your health:** Dowel hole can be made anywhere **time:** Hammer dowel holes anywhere at any time without worrying Scaled impact screwdriver blade provides more detailed depth adjusted to required size.

832 B8

Meets your requirements: Hammer components in a practical Wiha safety set with replaceable hammer heads of various degrees of hardness for all applications. **Simplifies your work:** Makes work easier, optimum impact effect and less effort needed. **Lowers your costs:** Each hammer component is available individually as a spare part.

Soft-faced hammer set Safety with assorted hammer faces, 8-pcs. in box
Order-No. 44008
More information: Page 328

The perfect complement:

Electrician's spirit level
Order-No. 42074
More information: Page 335

Meets your requirements: Yellow hammer head / medium-hard: e.g. for tool and machine engineering, car repairs, sheet metal and assembly work. **Simplifies your work:** Makes work easier, optimum impact effect and less effort needed. **Protect your health:** Deadblow Hammering without recoil minimises loads on joints, tendons and muscles.

Soft-faced hammer dead-blow, medium hard
With steel tube handle, round hammer face
Order-No. 02122
More information: Page 332

The perfect complement:

L-key set in ErgoStar holder
Order-No. 43851
More information: Page 230

No-recoil soft-faced hammer

The special metal filling in the hammer head prevents recoil.

Approx. 25% more hammer head mass provides additional power.

Preserves delicate surfaces and edges through high-impact effect.

Simplifies your work: Comfortable measurement in different when viewed from above. **Saves space:** Perfectly portable; fits 4 flush boxes. **Increases your efficiency:** Both bubbles can be

work positions thanks to the ingeniously positioned scales, even into Wiha cases. **Saves time:** Variable distance marks for up to seen easily even from an acute angle.

Simplifies your work: Comfortable measurement in different work positions thanks to the ingeniously positioned scales, even when viewed from above. **Saves space:** Perfectly portable; fits into Wiha cases. **Saves time:** Variable distance marks for up to 4 flush boxes. **Increases your efficiency:** Both bubbles can be seen easily even from an acute angle.

Electrician's spirit level
40 cm
Order-No. 42074
More information: Page 335

Product video:

Electrician's spirit level, 40 cm

Quick, easy marking of positions for up to four flush boxes in just one simple work step thanks to the integrated marking points.

The continuous housing allows users to mark lines without interruption.

An additional scale on the upper surface ensure precise measurement even when viewing from above.

The bubbles are clearly visible, even from a sharp angle.

The level is perfectly suitable for portable use thanks to its compact design.

Content

Competence XXL II electrician's tool set
Page 138

Tool set service technician
Page 142

Tool set slimVario® electric
Page 143

Tool set electrician
Page 143

E-screwdriver, set 2, speedE®
Page 156

speedE® Industrial e-screwdriver set
Page 159

Flashlight with LED, laser and UV light
Page 160

Single-pole, non-contact volt detector, 12–1,000 V AC
Page 160

Screwdriver and bit set slimVario® screwdriver
Page 164

slimBit electric bit set
Page 168

Screwdriver SoftFinish® electric slimFix
Page 172

Screwdriver SoftFinish®
Page 178

LiftUp 26one® skruetrækker med bitmagasin
Page 194

Torque screwdriver TorqueVario®-S electric
Page 195

Torque screwdriver with T-handle TorqueVario®-S T electric
Page 200

Torque screwdriver iTorque®
Page 201

Screwdriver with bit magazine LiftUp electric
Page 214

Screwdriver with bit magazine, LiftUp 26one®
Page 214

Multitool PocketStar
Page 217

Nut driver insert set gripper,
Page 220

L-key set in ErgoStar holder
Page 230

L-key set in ProStar holder
Page 232

L-key set in ProStar holder
Page 232

L-key set in ErgoStar holder
Page 235

BitBuddy® TY bit set, 29 mm
Page 257

XLSelector T bit set, 50 mm
Page 258

TY bit set 29 mm
Page 258

T bit set, 25 mm
Page 260

Installation pliers TriCut Professional electric
Page 287

Combination pliers Professional electric with DynamicJoint® and OptiGrip
Page 290

Stripping tool automatic
Page 295

Automatic crimp tool, for wire-end sleeves hex crimping
Page 298

Soft-faced hammer set Safety
Page 328

Soft-faced hammer Safety soft/medium hard
Page 329

Soft-faced hammer dead-blow, medium hard
Page 332

Electrician's hammer
Page 334

Ratchet wrench set insulated 3/8”
Page 147

Tool set mechanic
Page 151

Tool set ESD
Page 153

Ranges
From page 136

Torque QuickCheck torque testing device
Page 161

Electro
From page 154

Fine screwdriver PicoFinish
Page 184

Screwdriver MicroFinish®
Page 187

Screwdriver SoftFinish® ESD
Page 189

Screwdrivers
From page 162

Torque screwdriver TorqueVario®-S
Page 202

Torque screwdriver with T-handle TorqueVario®-S T
Page 206

Torque screwdriver TorqueVario®-S ESD
Page 209

Torque tools
From page 192

Screwdriver with interchangeable blade set SYSTEM 6
Page 221

Screwdriver with interchangeable blade set SYSTEM 6
Page 221

Screwdriver with interchangeable blade set SYSTEM 4 ESD
Page 223

Multitools
From page 212

L-key set in ProStar holder
Page 237

L-key with T-handle ComfortGrip
Page 247

L-key with key handle
Page 251

L-keys
From page 228

Y bit set, 25 mm
Page 261

Bit Professional 1/4"
Page 270

Bit holder CentroFix Force mechanically lockable 1/4", magnetic
Page 280

Bits
From page 254

Professional BiCut® high-performance diagonal cutters with DynamicJoint®, Switchable
Page 301

Pliers wrench Classic
Page 308

Classic circlip pliers with MagicTips®, straight
Page 312

Pliers
From page 284

SoftFinish® dowel racket set with dowels
Page 334

Electrician's spirit level 40 cm
Page 335

Electrician's Longlife® folding ruler, 2 m metric, 10 segments
Page 336

Impact tools / Measurement tools
From page 326

Information
From page 338

Ranges
Designed for those who work with it.

The experiences of the user are taken into account right from the product development stage at Wiha tools. This ensures high-quality tool sets are designed for mechanics, electricians and electronics technicians which have been specifically compiled for their particular requirements and applications. Neatly stored and clearly organised in robust, compact tool bags, tools are ready at hand, ensuring work is completed easily and efficiently.

Wiha tools prove to be very handy, essential companions stored in a Wiha tool case, where the limitations of conventional tool cases have been eliminated: thanks to its practical tool pockets and extra storage space for small parts, the Wiha tool case provides simple, strain-free transport of your tools, offering greater convenience to make your work easier in every respect.

Application Ranges

For applications in electrics

Competence XXL II electrician's tool set assorted in case 115-pcs.
Page 138

Tool set electrician Competence XL assorted 80-pcs. in case
Page 140

Tool set service technician assorted 29-pcs. in bag
Page 142

Tool set slimVario® electric, mixed, 31-pcs. in functional bag
Page 143

Tool set slimVario® electric Mixed, 12-pcs. in tool pouch
Page 144

Tool set electrician Screwdriver, diagonal cutters, 6-pcs. in tool pouch
Page 144

Tool set electrician assorted slotted, Phillips, 10-pcs. in belt pouch
Page 146

Tool set electrician 19-pcs. in roll-up bag
Page 145

Tool set electrician 20-pcs. in case
Page 147

Ratchet wrench set insulated 3/8" 20-pcs. in case
Page 147

Single open-end spanner set, insulated 6-32 mm 20-pcs. in case
Page 148

For applications in mechanics

Tool set mechanic Mixed, 31-pcs. in tool pouch
Page 151

Tool set mechanic Screwdriver, combination pliers, 6-pcs. in tool pouch
Page 152

For applications in electronics

Tool set ESD Pliers, screwdriver, tweezers, 9-pcs. in bag
Page 153

Competence XXL II electrician's tool set

assorted in case 115-pcs. **9500-704**

Order-No.		
42069		1
Fastening / jamming		
	Torque screwdriver set TorqueVario®-S electric (36791) 0,8-5,0 Nm 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings / 1 x Adjusting tool for torque screwdriver with long handle / 1 x Adapter TorqueVario-S electric for slimBits 1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 / 1 x PH1 / 1 x PH2 / 1 x PZ1 / 1 x PZ2 / 1 x SL/PZ1 / 1 x SL/PZ2 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	
	Screwdriver with bit magazine LiftUp electric (41234) 1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x PZ1 / 1 x PZ2 / 1 x SL/PZ2	
	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, VDE and GS tested (41229)	
	slimBit electric bit Pozidriv, VDE and GS tested / PZ2 x 75 (34586)	
	Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 5,5 x 125 (35391) / 6,5 x 150 (35392)	
	Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH1 x 80 (35393) / PH2 x 100 (35394)	
	Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ1 x 80 (35395) / PZ2 x 100 (35396)	
	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, VDE and GS tested / SL/PZ1 x 80 (36329) / SL/PZ2 x 100 (36330)	
	Screwdriver SoftFinish® electric slimFix TORX® Tamper Resistant (with hole), VDE and GS tested / T10H x 100 (41141) / T15H x 100 (41142) / T20H x 100 (41143) / T25H x 125 (41144)	
	Screwdriver SoftFinish® electric Hex nut driver, VDE and GS tested / 5,5 x 125 (00856) / 7 x 125 (00858) / 8 x 125 (00859) / 10 x 125 (00861) / 13 x 125 (00864)	
	Fine screwdriver PicoFinish electric Phillips, VDE and GS tested / PH0 x 60 (38880)	
	Fine screwdriver PicoFinish electric Slotted, VDE and GS tested / 2,5 x 60 (38876)	
	Switch cabinet key pen shape 1/4" in blister pack 5-8 x 9 (39076)	
	Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 3,5 x 75 (03223) / 12,0 x 200 (03231)	
	XLSelector Y bit set, 25 mm (41832) 1 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 4 x PZ2 / 2 x PZ3 / 2 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T30 / 2 x T40 / 1 x Bit holder magnetic extra strong magnet, 1/4"	
	L-key set in ErgoStar holder (41979) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10	

Which drives are used for each individual product? Page 338

Trimming / cutting	
	Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable, VDE and GS tested / 200mm, 8" (38191)
	Professional electric diagonal cutters with DynamicJoint® 160 x 6 1/2" (43335)
	Cable cutter Professional electric, VDE and GS tested / 200mm, 8" (34744)
	Precision mechanic's diagonal cutters Classic with opening spring 125mm, 5" (36189)
Supplying / holding	
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, VDE and GS tested / 180mm, 7" (26708)
	Needle nose pliers Professional electric with cutting edge curved shape, approx. 40°, VDE and GS tested / 200mm, 8" (26729)
	Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200mm, 8" (26727)
	Water pump pliers Professional electric with push button adjustment, VDE and GS tested / 250mm, 10" (37450)
Stripping/ insulating / crimping	
	Installation pliers TriCut Professional electric 170mm, 7" (38552)
	Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)
	Stripping tool automatic up to 16 mm² in blister pack 200mm, 8" (42062)
	Automatic crimp tool for wire-end sleeves hex crimping 210mm, 0,08-16mm² (41246)
	Crimp tool for insulated cable eyes and contacts 220mm, 0,5-6mm² (33841)
	Shear for electricians with crimp function in blister pack 160mm, 50mm² (41923)
Surveying/marking/measuring/checking	
	Single-pole, non-contact volt detector, 90–1,000 VAC Includes two AAA batteries (43798)
	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)
	Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries 100 / 310 lm x 390 - 400 nm (41286)
	Electrician's spirit level 40 cm (42074)
	Electrician's Longlife® folding ruler, 2 m metric, 10 segments (42068)
	SoftFinish® dowel racket set with dowels (41289) 1 x Dowel racket Phillips / 2 x 30 / 2 x 40
Striking/ chiselling	
	Electrician's hammer with 300 g hammer head, in blister pack 23,9 x 283 (42071)

Tool set electrician Competence XL

assorted 80-pcs. in case **9300-702**

Order-No.	
40523	1

Fastening / jamming

	Screwdriver SoftFinish® electric Hex nut driver, VDE and GS tested / 5,5 x 125 (00856) / 7 x 125 (00858) / 8 x 125 (00859) / 10 x 125 (00861)
	Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391) / 6,5 x 150 (35392)
	Screwdriver SoftFinish® electric slimFix electric PlusMinus/Phillips, VDE and GS tested / SL/PH1 x 80 (35502) / SL/PH2 x 100 (35503)
	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, VDE and GS tested / SL/PZ1 x 80 (36329) / SL/PZ2 x 100 (36330)
	Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH1 x 80 (35393) / PH2 x 100 (35394)
	Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ1 x 80 (35395) / PZ2 x 100 (35396)
	Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12,0 x 200 (03231)
	Switch cabinet key cross shape (36114)
	Screwdriver with bit magazine LiftUp electric (38611) 1 x 3,0 / 1 x 4,0 / 1 x 5,5 / 1 x PH1 / 1 x PH2 / 1 x SL/PZ2
	L-key set in Compact holder (01418) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10
	Bit set XLSelector Standard 25 mm (29417) 1 x 4,5 / 1 x 5,5 / 1 x 6,5 / 2 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 5 x PZ2 / 1 x PZ3 / 2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4"

Trimming / cutting

	Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable, VDE and GS tested / 200mm, 8" (38191)
	Precision mechanic's diagonal cutters Classic with opening spring 125mm, 5" (36189)

Supplying / holding

	Water pump pliers Professional electric with push button adjustment, VDE and GS tested / 250mm, 10" (37450)
	Needle nose pliers Professional electric with cutting edge curved shape, approx. 40°, VDE and GS tested / 200mm, 8" (26729)
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, VDE and GS tested / 180mm, 7" (26708)

Which drives are used for each individual product? Page 338

	Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200mm, 8" (26727)
Stripping/ insulating / crimping	
	Installation pliers TriCut Professional electric 170mm, 7" (38552)
	Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050)
	Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)
	Crimp tool for wire-end sleeves 220mm, 0,14-16mm² (33844)
Surveying/marking/measuring/checking	
	Single-pole, non-contact volt detector, 90–1,000 VAC Includes two AAA batteries (43798)
	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)
	Folding ruler Longlife 2 m metric, 10 segments (27057)
	Switch cabinet spirit level 20 cm (36859)

INFOBOX:
VDE-certified tools

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task
- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work. This is achieved by complying with the five safety rules:
- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

assorted 29-pcs. in bag **9300-040**

Order-No.	
43879	1
Fastening / jamming	
Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 5,5 x 125 (35391)	
Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH1 x 80 (35393) / PH2 x 100 (35394)	
Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ1 x 80 (35395) / PZ2 x 100 (35396)	
PicoFinish® fine screwdriver Slotted 1,5 x 40 (42384) / 2,0 x 40 (42388) / 2,5 x 50 (42391) / 3,0 x 50 (42394)	
PicoFinish® fine screwdriver Phillips PH00 x 40 (42402) / PH0 x 50 (42401)	
Switch cabinet key cross shape (36114)	
L-key set in Compact holder (01418) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10	
Trimming / cutting	
Diagonal cutters Electronic wide, pointed head without bevelled edge 130mm, 5 ½" (26818)	
Supplying / holding	
Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200mm, 8" (26727)	
Needle nose pliers Electronic narrow, short head straight form 150mm, 6" (26801)	
Stripping/ insulating / crimping	
Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)	
Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050)	
Surveying/marking/measuring/checking	
Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)	

Which drives are used for each individual product? Page 338

Tool set slimVario® electric

1000 V IEC 60900

mixed, 31-pcs. in functional bag

7209N

Order-No.	
43465	1
	2,0 x 75 / 3,5 x 75 / 5,5 x 75 / 6,5 x 75
	PH0 x 75 / PH1 x 75 / PH2 x 75
	SL/PZ1 x 75 / SL/PZ2 x 75
	PZ1 x 75 / PZ2 x 75
	5 x 42 / 5,5 x 42 / 6 x 42 / 7 x 42 / 8 x 42 / 10 x 42 / 11 x 42 / 13 x 42
	3 x 75 / 4 x 75 / 5 x 75
	T10 x 75 / T15 x 75 / T20 x 75 / T25 x 75
	slimVario® electric adapter for 1/4" nut driver
	Extension slimVario® electric for slimBits
	Screwdriver with bit holder SoftFinish® slimVario® electric / Fine screwdriver PicoFinish® slimVario® electric
	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, VDE and GS tested

Manufactured acc. to IEC 60900.

Tool set electrician

+20 % Power · Perfect Grip · 1000 V IEC 60900

Mixed, 31-pcs. in tool pouch

9300-035

Order-No.	
41241	1
Fastening / jamming	
	Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 5,5 x 125 (35391)
	Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH1 x 80 (35393) / PH2 x 100 (35394)
	Screwdriver with bit magazine magnetic (32901) 1 x 6,5 / 1 x PH1 / 1 x PH2 / 1 x PH3 / 1 x PZ2 / 1 x T15 / 1 x T20 / 1 x T25
	Bit set FlipSelector Standard 25 mm (39040) 1 x PH2 / 1 x PZ1 / 1 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4"
Supplying / holding	
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, VDE and GS tested / 180mm, 7" (26708)
Stripping/ insulating / crimping	
	Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050)
Surveying/marking/measuring/checking	
	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)
	Folding ruler Longlife 2 m metric, 10 segments (27057)

Tool set electrician

Mixed, 12-pcs. in tool pouch 9300-025

Order-No.	
36389	1

Fastening / jamming

- Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 4,5 x 125 (35501) / 5,5 x 125 (35391)
- Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ1 x 80 (35395) / PZ2 x 100 (35396)

Trimming / cutting

- Cable cutter Professional electric, VDE and GS tested / 200mm, 8" (34744)

Supplying / holding

- Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200mm, 8" (26727)
- Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 180mm, 7" (41274)

Stripping/ insulating / crimping

- Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050)
- Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)

Surveying/marking/measuring/checking

- Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)
- Folding ruler Longlife 2 m metric, 10 segments (27057)

Tool set electrician

Screwdriver, heavy-duty diagonal cutters, 7-pcs. in tool pouch 9300-031

Order-No.	
38020	1

Fastening / jamming

- Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391)
- Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH2 x 100 (35394)
- Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ2 x 100 (35396)
- Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, VDE and GS tested / SL/PZ2 x 100 (36330)

Supplying / holding

- Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 160mm, 6,5" (40921)

INFOBOX:
DynamicJoint®

Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

Which drives are used for each individual product? Page 338

Tool set electrician

Screwdriver, diagonal cutters, 6-pcs. in tool pouch

9300-018

Order-No.	
33969	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric Slotted, VDE and GS tested / 3,5 x 100 (00822) / 4,5 x 125 (00824) / 5,5 x 125 (00826)
⊕	Screwdriver SoftFinish® electric Phillips, VDE and GS tested / PH1 x 80 (00847) / PH2 x 100 (00848)

Tool set electrician

Screwdriver, needle nose pliers, diagonal cutters, 5-pcs. in tool pouch

9300

Order-No.	
26755	1

Fastening / jamming

⊖	Screwdriver SoftFinish® electric Slotted, VDE and GS tested / 3,5 x 100 (00822) / 5,5 x 125 (00826)
⊕	Screwdriver SoftFinish® electric Phillips, VDE and GS tested / PH2 x 100 (00848)

Supplying / holding

⊖	Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200mm, 8" (26727)

Bit set for mounting

19-pcs. in roll-up bag

79187 T04

Order-No.	
41223	1
✱	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
⊕	1 x PH0 / 1 x PH1 / 1 x PH2
✱	1 x SL/PZ1 / 1 x SL/PZ2
⊖	1 x 3,5 / 1 x 4,0 / 1 x 5,5
●	1 x 4,0 / 1 x 5,0 / 1 x 6,0
○	1 x Bit holder magnetic, 74 mm 1/4"
○	1 x Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
○	1 x Bit holder SYSTEM 6 clamping with ball

Tool set electrician

SLIM TECHNOLOGY · VDE · GS · 1000 V IEC 60900

assorted slotted, Phillips, 10-pcs. in belt pouch **9300-012-01**

Order-No.	
40948	1

Fastening / jamming

- Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391)
- Screwdriver SoftFinish® electric slimFix Phillips, VDE and GS tested / PH1 x 80 (35393) / PH2 x 100 (35394)

Stripping/ insulating / crimping

- Stripping pliers Professional electric 160mm, 6 ½" (26847)
- Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)

Supplying / holding

- Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200mm, 8" (26727)

Surveying/marking/measuring/checking

- Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)
- Measuring tape 5 m (33251)

Tool set electrician

SLIM TECHNOLOGY · VDE · GS · 1000 V IEC 60900

assorted slotted, Pozidriv, 10-pcs. in belt pouch **9300-013-02**

Order-No.	
40282	1

Fastening / jamming

- Screwdriver SoftFinish® electric slimFix Slotted, VDE and GS tested / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391)
- Screwdriver SoftFinish® electric slimFix Pozidriv, VDE and GS tested / PZ1 x 80 (35395) / PZ2 x 100 (35396)

Stripping/ insulating / crimping

- Stripping pliers Professional electric 160mm, 6 ½" (26847)
- Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)

Supplying / holding

- Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200mm, 8" (26727)

Surveying/marking/measuring/checking

- Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)
- Measuring tape 5 m (33251)

INFOBOX:
slimTECHNOLOGY

SLIM TECHNOLOGY



Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Which drives are used for each individual product? Page 338

Ratchet wrench set insulated 1/2”

1000 V
IEC 60900

20-pcs. in case **7208N**

Order-No.		
43024		1
	T-handle insulated for nut driver (43063)	
	Ratchet wrench insulated for nut drivers Switchable 1/2" x 250 mm (43053)	
○	Insulated extension 1/2" square adapter for nut driver inserts, insulated 1/2" x 250 mm (43056) / 1/2" x 125 mm (43055)	
○	Insulated nut driver insert 1/2" hexagon head 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 / 24 / 27 / 32	
◉	Insulated nut driver insert 1/2" internal hexagon 4 x 120 mm (43100) / 5 x 120 mm (43101) / 6 x 120 mm (43102) / 8 x 120 mm (43103) / 10 x 120 mm (43104)	

Manufactured according to EN/IEC 60900.

Ratchet wrench set insulated 3/8”

1000 V
IEC 60900

20-pcs. in case **7207NK2001**

Order-No.		
43023		1
	T-handle insulated for nut driver (43062)	
	Ratchet wrench insulated for nut drivers Switchable 3/8" x 200 mm (43052)	
○	Insulated extension 3/8" square adapter for nut driver inserts, insulated 3/8" x 125 mm (43057) / 3/8" x 250 mm (43058)	
○	Insulated nut driver insert 3/8" hexagon head 8 / 10 / 11 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 / 22	
◉	Insulated nut driver insert 3/8" internal hexagon 4 x 75 mm (43105) / 5 x 75 mm (43106) / 6 x 75 mm (43107) / 8 x 75 mm (43108)	

Manufactured according to EN/IEC 60900.

Single open-end spanner set, insulated 6-32 mm

1000 V IEC 60900

20-pcs. in case **5590N T20**

Order-No.		
43022		1
○	Single, insulated open-end spanner 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 22 / 24 / 27 / 30 / 32	
○	Adjustable spanner electric Adjustable between 0-30 mm 0 - 30 x 250 mm (43061)	

Manufactured according to EN/IEC 60900.

Single, insulated open-end spanner

1000 V IEC 60900

○ **5590N**

Order-No.	○	mm	
43026	6	90	1
43027	7	90	1
43028	8	100	1
43029	9	100	1
43030	10	110	1
43031	11	110	1
43032	12	130	1
43033	13	135	1
43034	14	145	1
43035	15	150	1
43036	16	160	1
43037	17	160	1
43038	18	175	1
43039	19	175	1
43040	22	195	1
43041	24	225	1
43042	27	250	1
43043	30	290	1
43044	32	310	1

Manufactured according to EN/IEC 60900.

Adjustable spanner electric

1000 V IEC 60900

○ **Adjustable between 0-30 mm** **5590NA**

Order-No.	○	mm	
43061	0 - 30	250	1

Manufactured according to EN/IEC 60900.

Which drives are used for each individual product? Page 338

T-handle insulated for nut driver

1000 V IEC 60900

24618T

Order-No.	■↕	mm	
43063	1/2"	200	10
43062	3/8"	200	10

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

1/4" hexagon head

7209NS

Order-No.	O	mm	
43088	4	42	1
43089	5	42	1
43090	5,5	42	1
43091	6	42	1
43092	7	42	1
43093	8	42	1
43094	9	42	1
43095	10	42	1
43096	11	42	1
43097	12	42	1
43098	13	42	1
43099	14	42	1

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

3/8" hexagon head

7207NS

Order-No.	O	mm	
43065	8	45	1
43066	10	45	1
43067	11	45	1
43068	12	45	1
43069	13	45	1
43070	14	45	1
43071	16	45	1
43072	17	45	1
43073	18	45	1
43074	19	47	1
43075	21	47	1
43076	22	47	1

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

1/2" hexagon head

7208NS

Order-No.	O	mm	
43077	10	55	1
43078	11	55	1
43079	12	55	1
43080	13	55	1
43081	14	55	1
43082	17	55	1
43083	19	55	1
43084	22	55	1
43085	24	55	1
43086	27	55	1
43087	32	55	1

Manufactured according to EN/IEC 60900.

Insulated extension

1000 V IEC 60900

1/2" square adapter for nut driver inserts, insulated

7208NEX

Order-No.	■↕	mm	
43055	1/2"	125	1
43056	1/2"	250	1

Manufactured according to EN/IEC 60900.

3/8" square adapter for nut driver inserts, insulated

7207NEX

Order-No.	■↕	mm	
43057	3/8"	125	1
43058	3/8"	250	1

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

1/2" internal hexagon

7208NHS

Order-No.	◉	mm	
43100	4	120	1
43101	5	120	1
43102	6	120	1
43103	8	120	1
43104	10	120	1

Manufactured according to EN/IEC 60900.

Insulated nut driver insert

1000 V IEC 60900

3/8" internal hexagon

7207NHS

Order-No.	◉	mm	
43105	4	75	1
43106	5	75	1
43107	6	75	1
43108	8	75	1

Manufactured according to EN/IEC 60900.

Ratchet wrench insulated for nut drivers

1000 V IEC 60900

Switchable

7207NRW

Order-No.	■↕	mm	
43052	3/8"	200	1
43053	1/2"	250	1

Manufactured according to EN/IEC 60900.

Which drives are used for each individual product? Page 338

Tool set mechanic

Mixed, 31-pcs. in tool pouch **9300-026**

Order-No.	
36390	1
	Screwdriver SoftFinish® Slotted with round blade and lasered mm scale 4,0 x 100 (36085) / 5,5 x 125 (35397)
	Screwdriver SoftFinish® Phillips with round blade and lasered mm scale PH1 x 80 (36072) / PH2 x 100 (35398)
	Screwdriver with T-handle and two bit holders ComfortGrip magnetic 1/4" 1/4 x 150 (26179)
	High-leverage combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 200mm, 8" (26713)
	Heavy-duty diagonal cutters Professional with DynamicJoint® with switchable opening spring 180mm, 7" (41273)
	Water pump pliers Classic with push button 250mm, 10" (26765)
	Folding ruler Longlife 2 m metric, 10 segments (27057)
	Bit set FlipSelector Standard 25 mm (39040) 2 x PH2 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4"
	L-key set in ErgoStar holder (37351) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Tool set mechanic

assorti 30-delig in gereedschapetui **9300-024**

Order-No.	
36388	1
	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3,0 x 100 (00687) / 5,5 x 125 (00698)
	Screwdriver SoftFinish® Phillips with round blade PH1 x 80 (00756) / PH2 x 100 (00759)
	Screwdriver with T-handle and bit holder magnetic 1/4" 1/4 x 150 (01481)
	Water pump pliers Classic box type 250mm, 10" (26761)
	Folding ruler Longlife 2 m metric, 10 segments (27057)
	Bit set FlipSelector Standard 25 mm (39040) 2 x PH2 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic, 58 mm 1/4"
	L-key set in Compact holder (01222) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

INFOBOX:
OptiGrip

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Tool set mechanic

Screwdriver, combination pliers, 6-pcs. in tool pouch

9300-019

Order-No.	
33970	1
⊖	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3,5 x 100 (00691) / 4,5 x 125 (00697)
⊖	Screwdriver SoftFinish® Slotted with round blade 6,5 x 150 (00703)
⊕	Screwdriver SoftFinish® Phillips with round blade PH1 x 80 (00756) / PH2 x 100 (00759)
	Combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 180mm, 7" (26707)

Tool set mechanic

Screwdriver, diagonal cutters, 6-pcs. in tool pouch

9300-020

Order-No.	
33971	1
⊖	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3,5 x 100 (00691) / 4,5 x 125 (00697)
⊖	Screwdriver SoftFinish® Slotted with round blade 6,5 x 150 (00703)
⊕	Screwdriver SoftFinish® Phillips with round blade PH1 x 80 (00756) / PH2 x 100 (00759)

Which drives are used for each individual product? Page 338

Tool set mechanic

Screwdriver, diagonal cutters, combination pliers, 5-pcs. in tool pouch

Z99000602

Order-No.	
30824	1
	Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3,5 x 100 (00691) / 5,5 x 125 (00698)
	Screwdriver SoftFinish® Phillips with round blade PH2 x 100 (00759)
	Combination pliers Industrial with DynamicJoint® and OptiGrip with extra long cutting edge 180mm, 7" (30826)

Tool set ESD

Pliers, screwdriver, tweezers, 9-pcs. in bag

9300-041

Order-No.	
43994	1
	Needle nose pliers Professional ESD straight 120 mm, 4 ¾" (26799)
	Diagonal cutters Professional ESD wide, pointed head without bevelled edge 115mm, 4 ½" (26821)
	Universal tweezers Professional ESD Type AA 130mm, AA (32318)
	Fine screwdriver PicoFinish® ESD Slotted 2,0 x 0,4 (43670) / 2,5 x 0,4 (43671)
	Fine screwdriver PicoFinish® ESD Phillips PH 0 x 50 (43677) / PH 00 x 40 (43676)
	Fine screwdriver PicoFinish® ESD TORX® 5 x 40 (43698) / 6 x 40 (43699)

INFOBOX:

Electrostatic conductive ESD tools



Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Electro

Safety for professionals.

With the speedE® e-screwdriver, Wiha is revolutionising the screwdriver market. Whether handling delicate fastenings, long screws or very many screws, professionals have no trouble working with the e-screwdriver. The material protection function in particular makes the speedE® unique: At 0.4 Nm the electrical assistance stops automatically and allows the user to finish tightening the screw carefully by hand. In combination with the VDE certified slimBits the speedE® offers electricians full protection during their daily work.

The swivelling Wiha flashlight features an integrated laser, UV light and LED light with two lighting levels.

With Torque QuickCheck, Wiha is bringing the first portable quick tester for regular checks on torque tools onto the market, thus guaranteeing safe and precise work.

Fastening

E-screwdriver, set 2, speedE®
Page 156

speedE® Industrial e-screwdriver set
Page 159

Surveying / marking

Flashlight with LED, laser and UV light
Page 160

Testing

Single-pole, explosion-protected, non-contact volt detector, 12–1,000 V AC
Page 160

Torque QuickCheck torque testing device
Page 161

E-screwdriver, set 1, speedE®

Slotted, Phillips, PlusMinus/Pozidriv, 10 pcs in L Boxx Mini with slimBits, batteries and EU charger

590

Order-No.		
41911	with USB and Europlug	1
42266	with USB and UK plug	1
	E-screwdriver handle speedE®	
⊖	slimBit electric bit Slotted, VDE and GS tested / 3,5 x 75 (41159) / 5,5 x 75 (34581)	
⊕	slimBit electric bit Phillips, VDE and GS tested / PH1 x 75 (34583) / PH2 x 75 (34584)	
⊕	slimBit electric bit PlusMinus/Pozidriv, VDE and GS tested / SL/PZ1 x 75 (34589) / SL/PZ2 x 75 (34590)	
	Battery set, 18500 Li-ion 2 units in box (41914)	
	Charger for 18500 Li-ion batteries (41915)	

E-screwdriver, set 2, speedE®

Mixed 13 pcs in L Boxx Mini with slimBits, easyTorque adapter, batteries and EU charger

590

Order-No.		
41912	with USB and Europlug	1
42267	with USB and UK plug	1
	E-screwdriver handle speedE®	
⊖	slimBit electric bit Slotted, VDE and GS tested / 3,5 x 75 (41159) / 5,5 x 75 (34581)	
⊕	slimBit electric bit Phillips, VDE and GS tested / PH1 x 75 (34583) / PH2 x 75 (34584)	
⊕	slimBit electric bit Pozidriv, VDE and GS tested / PZ1 x 75 (34585) / PZ2 x 75 (34586)	
⊕	slimBit electric bit PlusMinus/Pozidriv, VDE and GS tested / SL/PZ1 x 75 (34589) / SL/PZ2 x 75 (34590)	
	Torque adapter easyTorque electric for slimBits and slimVario® holder in blister 2,8 ± 10 % (41344)	
	Battery set, 18500 Li-ion 2 units in box (41914)	
	Charger for 18500 Li-ion batteries (41915)	

Which drives are used for each individual product? Page 338

E-screwdriver, set 3, speedE®

Mixed 25 pcs in L Boxx Mini with slimBits, easyTorque adapters, batteries and EU charger

590

Order-No.		
41913	with USB and Europlug	1
42268	with USB and UK plug	1
	E-screwdriver handle speedE®	
⊖	slimBit electric bit Slotted, VDE and GS tested / 3,5 x 75 (41159) / 5,5 x 75 (34581)	
⊕	slimBit electric bit Phillips, VDE and GS tested / PH1 x 75 (34583) / PH2 x 75 (34584)	
⊕	slimBit electric bit Pozidriv, VDE and GS tested / PZ1 x 75 (34585) / PZ2 x 75 (34586)	
⊕	slimBit electric bit PlusMinus/Pozidriv, VDE and GS tested / SL/PZ1 x 75 (34589) / SL/PZ2 x 75 (34590)	
✱	slimBit electric bit TORX®, VDE and GS tested / T10 x 75 (35507) / T15 x 75 (35508) / T20 x 75 (35509) / T25 x 75 (36071)	
✺	slimBit electric bit Hex, VDE and GS tested / 3 x 75 (37147) / 4 x 75 (37225) / 5 x 75 (37226) / 6 x 75 (37227)	
	Torque adapter easyTorque electric for slimBits and slimVario® holder in blister 0,8 ± 10 % (41341) / 2,0 ± 10 % (41342) / 2,5 ± 10 % (41343) / 2,8 ± 10 % (41344) / 4,0 ± 10 % (41345)	
	Battery set, 18500 Li-ion 2 units in box (41914)	
	Charger for 18500 Li-ion batteries (41915)	

INFOBOX:
Wiha speedE®

E-screwdriver speedE®

- Power-assisted screw-driving halves working time.
- Thanks to the integrated material protection function, the electric assistance stops automatically at 0.4 Nm.
- Final screw tightening can then be carried out by hand.
- Recommended by doctors and therapists.
- slimBits tested at 10,000 V AC and approved for 1,000 V AC.

Charger for 18500 Li-ion batteries

USB

with USB and Europlug

5992

Order-No.	
41915	1

Charger for 18500 Li-ion batteries

USB

with USB and UK plug

5992

Order-No.	
42766	1

Battery set, 18500 Li-ion

2 units in box

5991

Order-No.	
41914	6

Which drives are used for each individual product? Page 338

speedE® Industrial e-screwdriver set

TORX®, 5-pcs. with bit, battery and USB charger 590

Order-No.		
43631		1
	E-screwdriver handle, speedE® Industrial	
	Bit holder with 50 mm bit T20	
	18500 Li-Ion battery	
	USB charger for 18500 Li-ion batteries	

INFOBOX:
Wiha speedE® Industrial

E-screwdriver speedE®

- Recommended by doctors and therapists.
- Electric screw fastening with protection function to prevent damage to materials (max. 0.4 Nm).
- Fixing by hand with a deft touch.
- Work twice as fast thanks to three-step process.

Flashlight with LED, laser and UV light

in blister pack, including 3 AAA batteries

24670

Order-No.	LED		UV		SB	
41286	100 / 310 lm	Class 2	390 - 400 nm	3 x AAA batteries	x	5

Single-pole, non-contact volt detector, 12–1,000 V AC

Includes two AAA batteries

25513

Order-No.			mm	
43797	2	28,5	150	

Single-pole, non-contact volt detector, 90–1,000 VAC

Includes two AAA batteries

25514

Order-No.			mm	
43798	2	28,5	150	5

INFOBOX:
Volt Detector

Single-pole, non-contact volt detector, 12–1,000 V AC

- Rapid voltage test thanks to contactless measuring.
- Compatible for use in all sockets worldwide thanks to measurement tip suited to international usage.
- Voltage tester covers a wide voltage range between 12 and 1,000 V AC.

Torque QuickCheck torque testing device

with adapter blades and batteries in box

2909

Order-No.	Nm	±%	SB	
42086	2,8	2	x	1

INFOBOX:
Flashlight with LED, laser and UV light

- Universal work tool with integrated laser, UV light and LED light.
- Optimum positioning and variable light direction thanks to the magnetic base and swivel head.
- The installation position can be projected directly from the middle of a table when fitting lights to the ceiling.
- The integrated UV light is ideal for finding misplaced coloured fluorescent Wiha tools and for technical inspections.

INFOBOX:
Torque QuickCheck

Wiha Torque QuickCheck

- The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.
- Checking tools regularly ensures reliable, precise work.
- The device offers user-friendly operation, clear test readings and easy to understand LED traffic light signals.
- Thanks to a compact, handy shape, it is the ideal companion when out on jobs.
- Suitable for all Torque Vario®-S and iTorque® torque screwdrivers whose torque range included 2.8 Nm.

Screwdrivers

We have the know-how at the tip of our fingers.

Unlike many standard tools available on the market, Wiha screwdrivers are optimally designed for users' requirements. Thanks to Wiha's screwdriver handle size concept, four handle sizes and lengths, optimally adapted to their specific fastening or work task, ensure health-friendly work practices. With SoftFinish, Wiha became the world's first and only hand tool manufacturer to have products honoured with the renowned AGR quality seal - a seal of approval accepted by medical professionals and officially recommended by doctors and therapists. Wiha screwdrivers featuring SoftFinish are available for dry applications, damp and oily applications and as VDE-certified, insulated screwdrivers for use when working on live parts..

Wiha is the world's first hand tool manufacturer to receive AGR (Association for healthy backs) certification for its Inomic pliers and ergonomic screwdriver handle size concept, a seal of approval accepted by medical professionals and officially recommended by doctors and physiotherapists.

Application

Screwdrivers

For applications in electrics

Screwdriver and bit set slimVario® screwdriver Mixed, 18-pcs. in folding bag
Page 164

Screwdriver set SoftFinish® electric slimFix assorted 12-pcs.
Page 165



Screwdriver set SoftFinish® electric slimFix
Page 166

Screwdriver with bit holder set electric slimVario®, Stubby, 4 pieces with slimBits
Page 167

slimBit electric bit set
Page 168

Screwdriver SoftFinish® electric slimFix
Page 172

Screwdriver SoftFinish® electric
Page 173

Fine screwdriver PicoFinish electric
Page 174

For applications in mechanics

Screwdriver set SoftFinish® assorted 12-pcs.
Page 175

Screwdriver set SoftFinish®
Page 175

Screwdriver set SoftFinish®
Page 176

Fine screwdriver set PicoFinish
Page 177

Screwdriver SoftFinish®
Page 178

Screwdriver SoftFinish®
Page 182

Fine screwdriver PicoFinish
Page 184

Screwdriver SoftFinish®
Page 183

Screwdriver MicroFinish®
Page 187

Screwdriver MicroFinish®
Page 187

Screwdriver MicroFinish®
Page 187

Screw extractor set Hex, 8-pcs. with spiral drill bit in box
Page 188

For applications in electronics

Screwdriver set SoftFinish® ESD
Page 188

Fine screwdriver set PicoFinish® ESD
Page 189

Screwdriver SoftFinish® ESD
Page 189

Screwdriver and bit set slimVario® screwdriver

Mixed, 18-pcs. in folding bag

2831

Order-No.	
41231	1
	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits VDE and GS tested
	Screwdriver with bit holder SoftFinish® electric slimVario for slimBits VDE and GS tested
	2,5 x 75 / 3,5 x 75 / 5,5 x 75
	PH1 x 75 / PH2 x 75
	PZ1 x 75 / PZ2 x 75
	SL/PZ1 x 75 / SL/PZ2 x 75
	T9 x 75 / T10 x 75 / T15 x 75 / T20 x 75
	3 x 75 / 4 x 75 / 5 x 75

Manufactured acc. to IEC 60900.

Screwdriver and bit set slimVario® screwdriver

Slotted, Phillips, Pozidriv, 9-pcs. in folding bag

2831

Best.-Nr.	
41232	1
	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits VDE and GS tested
	Screwdriver with bit holder SoftFinish® electric slimVario for slimBits VDE and GS tested
	2,5 x 75 / 3,5 x 75 / 5,5 x 75
	PH1 x 75 / PH2 x 75
	PZ1 x 75 / PZ2 x 75

Manufactured acc. to IEC 60900.

Slotted, Pozidriv, PlusMinus/Pozidriv, 9-pcs. in folding bag

2831

Best.-Nr.	
41233	1
	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits VDE and GS tested
	Screwdriver with bit holder SoftFinish® electric slimVario for slimBits VDE and GS tested
	2,5 x 75 / 3,5 x 75 / 5,5 x 75
	PZ1 x 75 / PZ2 x 75
	SL/PZ1 x 75 / SL/PZ2 x 75

Manufactured acc. to IEC 60900.

INFOBOX:
slimTECHNOLOGY



Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Which drives are used for each individual product? Page 338

Screwdriver set SoftFinish® electric slimFix

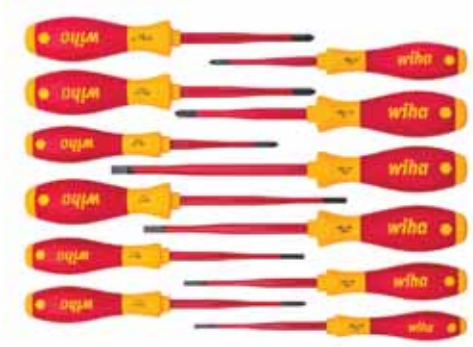

assorted 12-pcs. **3201**

Order-No.	
41003	1
	3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
	PH1 x 80 / PH2 x 100
	PZ1 x 80 / PZ2 x 100
	SL/PZ2 x 100
	T15 x 100 / T20 x 100 / T25 x 125

INFOBOX:
Handle size concept

Wiha SoftFinish® handle sizes

- Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.
- Quick-turning - Motor skills are consistently taken into consideration.
- Maximum power transmission: comfortable and loss-free transmission of physical strength, even during intensive fastening.
- The power-turning and quick-turning zones vary significantly over the four handle sizes in various forms.
- The Wiha SoftFinish screwdrivers enable work that is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.

INFOBOX:
VDE-certified tools

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task
- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.
This is achieved by complying with the five safety rules:
- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

Screwdriver set SoftFinish® electric slimFix

1000 V IEC 60900

Slotted, Phillips 6-pcs. — 3201

Best.-Nr.	
35389	1
	3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
	PH1 x 80 / PH2 x 100

Manufactured acc. to IEC 60900.

Slotted, Phillips, PlusMinus/Pozidriv 6-pcs. — 3201

Best.-Nr.	
38362	1
	3,5 x 100 / 4,0 x 100 / 5,5 x 125
	PH1 x 80 / PH2 x 100
	SL/PZ2 x 100

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs. — 3201

Best.-Nr.	
36455	1
	3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
	PZ1 x 80 / PZ2 x 100

Manufactured acc. to IEC 60900.

TORX® Tamper Resistant (with hole) 6-pcs. — 3251TR

Best.-Nr.	
41245	1
	T10H x 100 / T15H x 100 / T20H x 100 / T25H x 125 / T30H x 125 / T40H x 150

Manufactured acc. to IEC 60900.

TORX® 6-pcs. — 3251

Best.-Nr.	
36558	1
	T8 x 60 / T9 x 60
	T10 x 100 / T15 x 100 / T20 x 100 / T25 x 125

• no slim version
Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric slimFix

1000 V IEC 60900

Slotted, PlusMinus/Pozidriv, 2-pcs. in blister pack — 3201

Best.-Nr.	
36333	1
	3,5 x 100
	SL/PZ2 x 100

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric

1000 V IEC 60900

Slotted, Phillips 7-pcs. — 320N

Best.-Nr.	
00834	1
	2,5 x 75 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
	PH1 x 80 / PH2 x 100
	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip

Manufactured acc. to IEC 60900.

Slotted, Phillips 6-pcs. — 320N

Best.-Nr.	
00833	10
	3,0 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150
	PH1 x 80 / PH2 x 100

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs. — 320N

Best.-Nr.	
25477	1
	2,5 x 75 / 3,5 x 100 / 4,5 x 125 / 5,5 x 125
	PZ1 x 80 / PZ2 x 100

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

Screwdriver set SoftFinish® electric

PlusMinus/Phillips in blister pack 2-pcs. 327

Best.-Nr.	
32281	1
⊕	SL/PH1 x 80 / SL/PH2 x 100

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv, 2-pcs. in blister pack 328

Best.-Nr.	
32282	1
⊛	SL/PZ1 x 80 / SL/PZ2 x 100

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric

Hexagon nut driver 5-pcs. 322 K5

Order-No.	
29466	1
○	5,5 x 125 / 7 x 125 / 8 x 125 / 10 x 125 / 13 x 125

Manufactured acc. to IEC 60900.

INFOBOX:
Combination profiles

PlusMinus.

- The special PlusMinus/Pozidriv profile is ideal for PlusMinus terminal screws.
- The combination profile reduces slipping out and guarantees a higher torque transmission.

Screwdriver with bit holder set electric slimVario®

Stubby, 4 pieces with slimBits 2831

Order-No.	
41230	1
○	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBitsVDE and GS tested
⊖	3,5 x 75
⊕	PH2 x 75
⊛	SL/PZ2 x 75

Manufactured acc. to IEC 60900.

Fine screwdriver set PicoFinish® slimVario® electric

4-pcs. with slimBits 2831

Order-No.	
43167	5
	1 x Fine screwdriver PicoFinish® slimVario® electric /
⊖	1 x 2,0
⊕	1 x PH0
⊛	1 x PZ0

Manufactured acc. to IEC 60900.

Fine screwdriver set PicoFinish® electric

1000 V IEC 60900

Slotted, Phillips, 6 pcs. with holder

2270P

Order-No.	
42989	1
	1,5 x 50 / 2,0 x 50 / 2,5 x 65 / 3 x 65
	PH00 x 50 / PH0 x 65

INFOBOX:
PicoFinish electric

Wiha PicoFinish electric: The VDE-GS tested precision screwdriver.

- The smooth-running turn-cap enables fast turning.
- Imprint with the screw symbol and sizes eases recognition.

Screwdriver with bit holder SoftFinish® electric slimVario®

1000 V IEC 60900

for slimBits

283100

Order-No.				mm		
34577	6	30	50	160	13	5

Manufactured acc. to IEC 60900.

slimBit electric bit set

1000 V IEC 60900

SLIM

TORX®, TORX PLUS®, 12-pcs. in SlimBit box

2831

Best.-Nr.	
43161	6
	6IP x 75 / 7IP x 75 / 8IP x 75 / 9IP x 75 / 10IP x 75 / 15IP x 75
	T6 x 75 / T7 x 75 / T8 x 75 / T9 x 75 / T10 x 75 / T15 x 75
	slimBit box empty, 2-pcs. with belt clip

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv, TORX® 12-pcs. in SlimBit box

2831

Best.-Nr.	
43162	6
	3,5 x 75 / 5,5 x 75
	PH1 x 75 / PH2 x 75
	PZ1 x 75 / PZ2 x 75
	SL/PZ1 x 75 / SL/PZ2 x 75
	T10 x 75 / T15 x 75 / T20 x 75 / T25 x 75
	slimBit box empty, 2-pcs. with belt clip

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

1000 V IEC 60900

Slotted, 6-pcs. in SlimBit box

2831

Best.-Nr.	
43152	6
	2,0 x 75 / 2,5 x 75 / 3,5 x 75 / 4,0 x 75 / 5,5 x 75 / 6,5 x 75

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box

2831

Best.-Nr.	
43153	6
	T8 x 75 / T9 x 75 / T10 x 75 / T15 x 75 / T20 x 75 / T25 x 75

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box

2831

Best.-Nr.	
43154	6
	T6 x 75 / T7 x 75 / T8 x 75 / T9 x 75 / T10 x 75 / T15 x 75

Manufactured acc. to IEC 60900.

TORX PLUS®, 6-pcs. in SlimBit box

2831

Best.-Nr.	
43155	6
	6IP x 75 / 7IP x 75 / 8IP x 75 / 9IP x 75 / 10IP x 75 / 15IP x 75

Manufactured acc. to IEC 60900.

Hex, 6-pcs. in SlimBit box

2831

Best.-Nr.	
43156	6
	2 x 75 / 2,5 x 75 / 3 x 75 / 4 x 75 / 5 x 75 / 6 x 75

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs. in SlimBit box

2831

Best.-Nr.	
43157	6
	2,5 x 75 / 3,5 x 75 / 5,5 x 75 / 6,5 x 75
	PZ1 x 75 / PZ2 x 75

Manufactured acc. to IEC 60900.

Slotted, PlusMinus/Pozidriv 6-pcs. in SlimBit box

2831

Best.-Nr.	
43158	6
	2,5 x 75 / 3,5 x 75 / 5,5 x 75 / 6,5 x 75
	SL/PZ1 x 75 / SL/PZ2 x 75

Manufactured acc. to IEC 60900.

Slotted, Phillips 6-pcs. in SlimBit box

2831

Best.-Nr.	
43159	6
	2,5 x 75 / 3,5 x 75 / 5,5 x 75 / 6,5 x 75
	PH1 x 75 / PH2 x 75

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv 6-pcs. in SlimBit box

2831

Best.-Nr.	
43160	6
	2,0 x 75 / 2,5 x 75
	PH0 x 75 / PH1 x 75
	PZ0 x 75 / PZ1 x 75

Manufactured acc. to IEC 60900.

slimBit electric bit

Slotted

283110

Order-No.	⊖	mm	⊖↕	◉↕	max. Nm	
43114	1,5•	75	0,4	6,0	0,4	5
43115	2,0•	75	0,4	6,0	0,4	5
34578	2,5•	75	0,4	6,0	0,4	5
34579	3,0•	75	0,5	6,0	0,6	5
41159	3,5	75	0,6	6,0	1,4	5
34580	4,0	75	0,8	6,0	2,5	5
34581	5,5	75	1,0	6,0	3,8	5
34582	6,5	75	1,2	6,0	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

Phillips

283111

Order-No.	⊕	mm	◉↕	max. Nm	
43116	PH0•	75	6,0	0,4	5
34583	PH1	75	6,0	3,8	5
34584	PH2	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

Pozidriv

283112

Order-No.	⊕	mm	◉↕	max. Nm	
43117	PZ0•	75	6,0	0,5	5
34585	PZ1	75	6,0	3,8	5
34586	PZ2	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

283113

Order-No.	⊕	mm	◉↕	max. Nm	
34587	SL/PH1	75	6,0	3,8	5
34588	SL/PH2	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

283114

Order-No.	⊕	mm	◉↕	max. Nm	
34589	SL/PZ1	75	6,0	3,8	5
34590	SL/PZ2	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

TORX®

283115

Order-No.	✱	mm	◉↕	max. Nm	
43140	T5•	75	6,0	0,4	5
43141	T6•	75	6,0	0,4	5
43142	T7•	75	6,0	0,4	5
35506	T8•	75	6,0	1,3	5
41160	T9•	75	6,0	1,3	5
35507	T10•	75	6,0	3,8	5
35508	T15	75	6,0	5,0	5
35509	T20	75	6,0	5,5	5
36071	T25	75	6,0	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

TORX PLUS®

283116

Order-No.	✱	mm	◉↕	max. Nm	
43143	5IP•	75	6	0,5	5
43144	6IP•	75	6	0,8	5
43145	7IP•	75	6	1,3	5
43146	8IP•	75	6	2,0	5
43147	9IP•	75	6	3,0	5
43148	10IP•	75	6	4,5	5
43149	15IP	75	6	5,5	5
43150	20IP	75	6	5,5	5
43151	25IP	75	6	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

Hex

283118

Order-No.	◉	mm	◉↕	max. Nm	
37222	1,5•	75	6,0	0,9	5
37223	2•	75	6,0	1,8	5
37224	2,5	75	6,0	3,8	5
37147	3	75	6,0	5,5	5
37225	4	75	6,0	5,5	5
37226	5	75	6,0	5,5	5
37227	6	75	6,0	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

Square

283117

Order-No.	▣	▣	mm	◉↕	max. Nm	
35510	#1	2,3	75	6,0	5,5	5
35511	#2	2,8	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

slimBit box

empty, 2-pcs. with belt clip **2831-B992**

Order-No.	
43164	6,00
2x slimBit box Empty	
1x Belt holster for slimBit box, empty	

slimBit box

Empty

Order-No.	
43163	6

INFOBOX:
slimTECHNOLOGY



Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Slotted

3201

Order-No.				mm		
35446	3,5	100	0,6	204	23	10
35390	4,0	100	0,8	211	30	10
35501	4,5	125	1,0	236	30	10
35391	5,5	125	1,0	243	36	10
35392	6,5	150	1,2	268	36	10

DIN ISO 2380. Manufactured acc. to IEC 60900.

Phillips

3211

Order-No.			mm		
35393	PH1	80	191	30	10
35394	PH2	100	218	36	10

DIN ISO 8764-PH. Manufactured acc. to IEC 60900.

Pozidriv

3241

Order-No.			mm		SB	
35395	PZ1	80	191	30		10
35396	PZ2	100	218	36		10

DIN ISO 8764-PZ. Manufactured acc. to IEC 60900.

PlusMinus/Phillips

3271

Order-No.			mm		
35502	SL/PH1	80	191	30	10
35503	SL/PH2	100	218	36	10

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

3281

Order-No.			mm		SB	
36329	SL/PZ1	80	191	30		10
36330	SL/PZ2	100	218	36		10

Manufactured acc. to IEC 60900.

TORX® Tamper Resistant (with hole)

3251 TR

Order-No.			mm		
41141	T10H	100	204	23	10
41142	T15H	100	211	30	10
41143	T20H	100	211	30	10
41144	T25H	125	243	36	10
41145	T27H	125	243	36	10
41146	T30H	125	243	36	10
41147	T40H	150	268	36	10

Manufactured acc. to IEC 60900.

TORX®

3251

Order-No.			mm		
36536	T10	100	204	23	10
36537	T15	100	211	30	10
36538	T20	100	211	30	10
36539	T25	125	243	36	10
36540	T27	125	243	36	10
36541	T30	125	243	36	10
36542	T40	150	268	36	10

DIN ISO 8764-PH. Manufactured acc. to IEC 60900.

Square

3581

Order-No.				mm		
35504	#1	2,3	100	211	30	10
35505	#2	2,8	125	243	36	10

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

1000 V
IEC 60900

Slotted

320N

Order-No.	⊖		⊖	mm		
00819	2,0	60	0,4	164	23	10
00820	2,5	75	0,4	179	23	10
00821	3,0	100	0,5	204	23	10
00822	3,5	100	0,6	204	23	10
00823	4,0	100	0,8	211	30	10
00824	4,5•	125	1,0	236	30	10
00825	4,5•	175	1,0	286	30	5
31863	4,5	200	1,0	311	30	5
00826	5,5	125	1,0	243	36	10
00827	5,5•	175	1,0	293	36	5
00828	6,0•	150	1,2	268	36	10
00829	6,5	150	1,2	268	36	10
00830	8,0	175	1,2	299	41	10
00831	8,0	175	1,6	299	41	10
00832	10,0•	200	1,6	324	41	5

• Additional dimension. Non-DIN size.
Manufactured acc. to IEC 60900.

Phillips

321N

Order-No.	⊕		mm		
00846	PH0	60	164	23	10
00847	PH1	80	191	30	10
00848	PH2	100	218	36	10
00849	PH3	150	268	41	10
00850	PH4	200	318	41	5

Manufactured acc. to IEC 60900.

Pozidriv

324

Order-No.	⊕		mm		
00877	PZ0	60	164	23	10
00878	PZ1	80	191	30	10
00879	PZ2	100	218	36	10
00880	PZ3	150	324	41	5

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

327

Order-No.	⊕		mm		
30716	SL/PH1	80	191	30	10
30715	SL/PH2	100	218	36	10

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

328

Order-No.			mm		
30700	SL/PZ1	80	191	30	10
30701	SL/PZ2	100	218	36	10

Manufactured acc. to IEC 60900.

TORX®

325

Order-No.			mm		
03760	T5	60	164	23	10
03761	T6	60	164	23	10
03762	T7	60	164	23	10
00881	T8	60	164	23	10
00882	T9	60	164	23	10

Manufactured acc. to IEC 60900.

Hex

323N

Order-No.			mm		
30361	2,5	75	179	23	10
30362	3,0	75	179	23	10
30363	4,0	75	186	30	10
30364	5,0	75	186	30	10
30365	6,0	100	218	36	10
30366	8,0	100	218	36	10

Manufactured acc. to IEC 60900.

Square

358N

Order-No.			mm		
32396	#1	2,3	100	211	30	10
32397	#2	2,8	150	268	36	10

Manufactured acc. to IEC 60900.

Screwdriver SoftFinish® electric

Hex nut driver

322

Order-No.			mm			
00853	4	125	236	30	10,2	10
00855	5	125	236	30	11,2	10
00856	5,5	125	236	30	11,2	10
00857	6	125	236	30	12,2	10
00858	7	125	243	36	14,5	10
00859	8	125	243	36	15,2	10
00860	9	125	243	36	16,0	10
00861	10	125	243	36	17,2	10
00862	11	125	243	41	19,2	10
00863	12	125	243	41	20,2	10
00864	13	125	243	41	22,2	10
00865	14	125	243	41	23,2	10
00866	15	125	243	41	25,2	10
00867	16	125	243	41	25,2	10
00868	17	125	243	41	27,2	10

Manufactured acc. to IEC 60900.

Fine screwdriver PicoFinish electric

Slotted

2270P

Order-No.				mm		
42374	1,5	50	2,0	152	18	10
42375	2,0	50	2,0	152	18	10
42376	2,5	65	2,5	167	18	10
42377	3	65	3	167	18	10
42471	3,5	65	3,5	167	18	10

Phillips

2271P

Order-No.				mm		
42379	PH00	50	2	152	18	10
42378	PH0	65	3	167	18	10
42380	PH1	65	4	167	18	10

Voltage tester SoftFinish® single-pole, 110-250 volts

Slotted transparent, with push-on clip

255-11

Order-No.				mm		SB	
34745	3,0	60	0,5	140	19		10
35378	3,0	60	0,5	140	19	x	5

Tested according to DIN 57680-6, GS, CE compliant.

Single-pole, explosion-protected, non-contact volt detector, 12–1,000 V AC

Includes two AAA batteries

25513

Order-No.			mm	
43797	2	28,5	150	

Single-pole, non-contact volt detector, 90–1,000 VAC

Includes two AAA batteries

25514

Order-No.			mm	
43798	2	28,5	150	5

Voltage tester 220-250 volts

Slotted transparent, with push-on clip

255-3

Order-No.			mm		SB	
05271	3,0	60	140	15		10
32201	3,0	60	140	15	x	5

Voltage tester 150-250 volts

Slotted black, with push-on clip

255-7

Order-No.			mm		SB	
00456	3,0	60	160	17		10
31771	3,0	60	160	17	x	1

Which drives are used for each individual product? Page 338

Screwdriver set SoftFinish®

assorted 12-pcs. 302

Order-No.	
41002	1
4,0 x 100 / 3,5 x 100	
6,5 x 150	
PH1 x 80 / PH2 x 100 / PH3 x 150	
PZ1 x 80 / PZ2 x 100	
T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115	

Screwdriver set SoftFinish®

Slotted, Phillips 6-pcs. 302

Best.-Nr.	
07152	1
3,5 x 100 / 4,5 x 125 / 5,5 x 150 / 6,5 x 150	
PH1 x 80 / PH2 x 100	

Phillips, Pozidriv 6-pcs. 302

Best.-Nr.	
26113	1
4,0 x 100 / 5,5 x 125 / 6,5 x 150	
PH1 x 80 / PH2 x 100	
PZ2 x 100	

Slotted, Pozidriv 6-pcs. 302

Best.-Nr.	
07153	1
3,5 x 100 / 4,5 x 125 / 5,5 x 150 / 6,5 x 150	
PZ1 x 80 / PZ2 x 100	

TORX® MagicSpring® 6-pcs. 362R

Best.-Nr.	
27746	1
T10 x 80 / T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115 / T40 x 130	

TORX® 7-pcs. 362

Best.-Nr.	
01299	1
T8 x 60 / T9 x 60 / T10 x 80 / T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115	

TORX® 6-pcs. 362

Best.-Nr.	
07155	1
T10 x 80 / T15 x 80 / T20 x 100 / T25 x 100 / T30 x 115 / T40 x 130	

TORX® Tamper Resistant (with hole) 6-pcs. 362TR

Best.-Nr.	
24506	1
T10H x 80 / T15H x 80 / T20H x 100 / T25H x 100 / T30H x 115 / T40H x 130	

INFOBOX:
Wiha SoftFinish® screwdriver

The convenient expert for dry applications.

- The SoftFinish handle provides optimal grip for dry applications in trade and industry.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

Screwdriver set SoftFinish®

Hexagon nut driver 5-pcs. 341

Order-No.	
01034	1
○	5,5 x 125 / 7 x 125 / 8 x 125 / 10 x 125 / 13 x 125

Screwdriver set SoftFinish®

Slotted, Phillips with hexagon head 6-pcs. 308

Best.-Nr.	
21248	1
⊖	3,5 x 75 / 4,5 x 90 / 5,5 x 100 / 7,0 x 125
⊕	PH1 x 80 / PH2 x 100

Slotted, Pozidriv with hexagon head, 6-pcs. 308

Best.-Nr.	
21249	1
⊖	3,5 x 75 / 4,5 x 90 / 5,5 x 100 / 7,0 x 125
⊕	PZ1 x 80 / PZ2 x 100

Screwdriver set SoftFinish®

Slotted, Phillips hexagonal blade and solid steel cap, 6-pcs. 530

Best.-Nr.	
21250	1
⊖	3,5 x 75 / 4,5 x 90 / 5,5 x 100 / 6,5 x 125
⊕	PH1 x 80 / PH2 x 100

Slotted, Pozidriv hexagonal blade and solid steel cap, 6-pcs. 530

Best.-Nr.	
21251	1
⊖	3,5 x 75 / 4,5 x 90 / 5,5 x 100 / 6,5 x 125
⊕	PZ1 x 80 / PZ2 x 100

INFOBOX:

Solid steel cap and hexagon head

- The solid steel cap at the end of the screwdriver handle enables targeted hammering, e.g. to loosen jammed screws.
- The direct connection of the solid steel cap to the blade means that the impact energy is transmitted without any loss.
- Blade includes a hexagon bolster for using a set of spanners for additional torque.

Which drives are used for each individual product? Page 338

Slotted, Phillips 7-pcs. — 260P

Best.-Nr.	
42991	1
	1,5 x 40 / 2,0 x 40 / 2,5 x 50 / 3,0 x 50
	PH00 x 40 / PH0 x 50 / PH1 x 60

Slotted, Phillips, 6 pcs. with holder — 260P

Best.-Nr.	
42990	1
	1,5 x 40 / 2,0 x 40 / 2,5 x 50 / 3,0 x 50
	PH00 x 40 / PH0 x 50

TORX® MagicSpring®, 6 pcs. with holder — 267PR

Best.-Nr.	
42998	1
	T6 x 40 / T7 x 40 / T8 x 40 / T9 x 50 / T10 x 50 / T15 x 60

TORX®, 6 pcs. with holder — 267P

Best.-Nr.	
42996	1
	T9 x 50 / T20 x 60 / T8 x 40 / T7 x 40 / T15 x 60 / T10 x 50

TORX®, 6 pcs. with holder — 267P

Best.-Nr.	
42997	1
	T4 x 40 / T5 x 40 / T6 x 40 / T7 x 40 / T8 x 40 / T9 x 50

Hexagonal ball end, 6 pcs. with holder — 264P

Best.-Nr.	
42993	1
	0,9 x 0,035
	1,3 (0,05") x 40 / 1,5 x 50 / 2,0 x 50 / 2,5 x 60 / 3,0 x 60

Ball end from AF 1.3 upwards

Hex, 6 pcs. with holder — 263P

Best.-Nr.	
42992	1
	0,9 x 0,035 / 1,3 x 0,05 / 1,5 x 50 / 2,0 x 5/64 / 2,5 x 60 / 3 x 60

Hex nut driver, 6 pcs. with holder — 265P

Best.-Nr.	
42994	1
	2,5 x 60 / 3,0 x 60 / 3,5 x 60 / 4,0 x 60 / 5 x 60 / 5,5 x 60

INFOBOX: MagicSpring®

Wiha TORX® MagicSpring®

- TORX® and TORX PLUS® screws are held securely in place.
- An innovation, which will benefit each user.

INFOBOX: PicoFinish

Wiha PicoFinish precision screwdriver

- The comfortable precision screwdriver for fine and delicate fastenings.
- The smooth-running turn-cap enables fast turning.
- Imprint with the screw symbol and sizes eases recognition.

Screwdriver SoftFinish®

With round blade for low-lying screws

With round blade

Slotted with round blade for low-lying screws

302

Order-No.	⊖		⊖	●	mm		
00684	2,0•	65	0,4	2,0	169	23	10
00685	2,5	75	0,4	2,5	179	23	10
00686	3,0•	80	0,5	3,0	184	23	10
00687	3,0	100	0,5	3,0	204	23	10
00689	3,0•	150	0,5	3,0	254	23	10
00690	3,0•	200	0,5	3,0	304	23	10
32383	3,0	300	0,5	3,0	404	23	5
00691	3,5	100	0,6	3,5	204	23	10
26931	3,5•	200	0,6	3,5	304	23	10
00692	4,0	100	0,8	4,0	211	30	10
00694	4,0•	150	0,8	4,0	261	30	10
00695	4,0•	200	0,8	4,0	311	30	10
00696	4,0•	300	0,8	4,0	411	30	10
27753	4,5•	80	0,8	4,5	191	30	10
00697	4,5•	125	0,8	4,5	236	30	10
00698	5,5	125	1,0	5,5	236	30	10
00700	5,5	150	1,0	5,5	261	30	10
00701	5,5•	200	1,0	5,5	311	30	10
00702	5,5•	300	1,0	5,5	411	30	5
32384	6,0•	300	1,0	6,0	418	36	5
39591	2,5	75	0,4	2,5	179	23	10

• Additional dimension. Non-DIN size.

Slotted with round blade

3022

Order-No.	⊖		⊖	●	mm		
27754	6,0	100	1,0	5,5	218	36	10
27755	6,0	150	1,0	5,5	268	36	10
00704	6,5	100	1,2	6,0	218	36	10
00703	6,5	150	1,2	6,0	268	36	10
00706	6,5•	200	1,2	6,0	318	36	10
00708	8,0	150	1,2	7,0	274	41	10
00707	8,0	175	1,2	7,0	299	41	10
00709	8,0	175	1,6	7,0	299	41	5
32399	8,0	300	1,2	7,0	424	41	5
00711	10,0	200	1,6	8,0	324	41	10
32400	10,0	300	1,6	8,0	424	41	5
00712	12,0	250	2,0	8,0	374	41	10
00713	14,0•	250	2,5	11,0	374	41	10

• Additional dimension. Non-DIN size.
DIN ISO 2380.

Phillips with round blade

311

Order-No.	⊕		●	mm		SB	
00754	PH0	60	3,0	164	23		10
27756	PH0	100	3,0	204	23		10
00756	PH1	80	4,5	191	30		10
27757	PH1	100	4,5	211	30		10
00757	PH1•	200	4,5	311	30		10
03738	PH1•	300	4,5	411	30		5
00759	PH2	100	6,0	218	36		10
27758	PH2	150	6,0	268	36		10
00760	PH2•	200	6,0	318	36		10
03739	PH2•	300	6,0	418	36		5
00762	PH3	150	8,0	274	41		10
00763	PH4•	200	10,0	324	41		10

• Additional dimension. Non-DIN size.
DIN ISO 8764-PH.

Pozidriv with round blade

313

Order-No.	⊕		●	mm		SB	
00768	PZ0	60	3,0	164	23		10
00770	PZ1	80	4,5	191	30		10
26454	PZ1	300	4,5	411	30		5
00772	PZ2	100	6,0	218	36		10
26455	PZ2	300	6,0	418	36		5
00774	PZ3	150	8,0	274	41		10

TORX® ball end with hexagonal blade

362BE

Order-No.			⬢	⬢	mm		
32250	T9	60	7/64	2,8	164	23	10
32251	T10	60	1/8	3,2	184	23	10
32252	T15	80	9/64	3,6	191	30	10
32253	T20	80	5/32	4,0	211	30	10
32254	T25	100	3/16	4,8	218	36	10
32255	T27	115	7/32	5,6	233	36	10
32256	T30	115	1/4	6,4	233	36	10

TORX® MagicSpring® with round blade

362R

Order-No.			●	mm		
27736	T6	60	3,5	164	23	10
27737	T7	60	3,5	164	23	10
27738	T8	60	3,5	164	23	10
27739	T9	60	4,0	171	30	10
27740	T10	80	4,0	191	30	10
27741	T15	80	4,0	191	30	10
27742	T20	100	4,0	218	36	10
27743	T25	100	4,5	218	36	10
27811	T27	115	5,5	233	36	10
27744	T30	115	6,0	233	36	10
27745	T40	130	7,0	254	41	10

Which drives are used for each individual product? Page 338

TORX® with round blade

362

Order-No.				mm		SB	
26259	T3	60	2,5	164	23		10
26260	T4	60	2,5	164	23		10
01285	T5	60	2,5	164	23		10
01286	T6	60	3,5	164	23		10
01287	T7	60	3,5	164	23		10
01288	T8	60	3,5	164	23		10
01289	T9	60	4,0	171	30		10
01290	T10	80	4,0	191	30		10
01291	T15	80	4,0	191	30		10
01292	T20	100	4,0	218	36		10
01293	T25	100	4,5	218	36		10
01294	T27	115	5,5	233	36		10
01295	T30	115	6,0	233	36		10
01296	T40	130	7,0	254	41		10
01297	T45	130	8,0	254	41		5

TORX® Tamper Resistant (with hole) with round blade

362TR

Order-No.				mm		
03106	T7H	60	3,5	164	23	10
03107	T8H	60	3,5	164	23	10
03108	T9H	60	4,0	171	30	10
01300	T10H	80	4,0	191	30	10
26457	T10H	300	4,0	411	30	5
01301	T15H	80	4,0	191	30	10
26458	T15H	300	5,0	411	30	5
01302	T20H	100	4,0	211	30	10
28005	T20H	300	5,0	411	30	5
01303	T25H	100	4,5	211	30	10
01304	T27H	115	5,5	233	36	10
01305	T30H	115	6,0	233	36	10
01306	T40H	130	7,0	254	41	10

TORX PLUS® MagicSpring® with round blade

362RIP

Order-No.				mm		
28760	6IP	60	3,5	164	23	10
28761	7IP	60	3,5	164	23	10
28762	8IP	60	3,5	164	23	10
28763	9IP	60	4,0	171	30	10
28764	10IP	80	4,0	191	30	10
28765	15IP	80	4,0	191	30	10
28766	20IP	100	4,0	218	36	10
28767	25IP	100	4,5	218	36	10
28769	30IP	115	6,0	233	36	10

TORX PLUS® with round blade

362IP

Order-No.				mm		
26091	6IP	60	3,5	164	23	10
26093	7IP	60	3,5	164	23	10
26095	8IP	60	3,5	164	23	10
26097	9IP	60	4,0	171	30	10
26099	10IP	80	4,0	191	30	10
26101	15IP	80	4,0	191	30	10
26103	20IP	100	4,0	218	36	10
26105	25IP	100	4,5	218	36	10
26107	27IP	115	5,5	233	36	10
26109	30IP	115	6,0	233	36	10
26111	40IP	130	7,0	254	41	10

MagicRing® hexagonal ball end with hexagonal blade

367R

Order-No.			mm		
26077	3	100	204	23	10
26079	4	100	211	30	10
26081	5	100	211	30	10
26083	6	125	243	36	10
26085	8	150	268	36	10
26087	10	150	271	41	5

Hexagonal ball end with hexagonal blade

367

Order-No.			mm		
26303	1,5	75	179	23	10
26304	2	100	204	23	10
26305	2,5	100	204	23	10
26328	3	100	204	23	10
26329	4	100	211	30	10
26330	5	100	211	30	10
26331	6	125	243	36	10
26332	8	150	268	36	10
26333	10	150	271	41	5
26307	12	150	271	41	5

Hexagon with hexagonal blade

356

Order-No.			mm		
32264	1,5	60	164	23	10
32265	2	60	164	23	10
26190	2,5	75	179	23	10
26191	3	75	179	23	10
26192	4	75	186	30	10
26193	5	75	186	30	10
26194	6	100	218	36	10
26195	8	100	218	36	10

Hexagon angled

357

Order-No.						
26230	3	35	20	139	23	10
26231	4	40	25	151	30	10
26232	5	45	28	156	30	10
26233	6	50	32	168	36	10
26234	8	60	36	178	36	10

Screwdriver SoftFinish®

Hexagon nut driver with round blade

341

Order-No.			mm			
01018	4	125	236	30	6,9	10
01020	5	125	236	30	7,9	10
01021	5,5	125	236	30	7,9	10
01022	6	125	236	30	8,9	10
01023	7	125	243	36	10,9	10
01024	8	125	243	36	11,9	10
01025	9	125	243	36	12,9	10
01026	10	125	243	36	14,4	10
01027	11	125	249	41	15,9	10
01028	12	125	249	41	16,9	10
01029	13	125	249	41	18,4	10
01030	14	125	249	41	19,4	10
01031	15	125	249	41	21,9	10
01032	16	125	249	41	21,9	10
01033	17	125	249	41	23,4	10

Hexagon nut driver with short round blade

343

Order-No.			mm			
01076	5,5	65	176	30	8	10
01077	6	65	176	30	9	10
01078	7	65	183	36	11	10
01079	8	65	183	36	12	10
01081	10	65	183	36	14	10

Which drives are used for each individual product? Page 338

Screwdriver SoftFinish®

Hexagon nut driver, inch design with round blade and hexagon head

347Z

Order-No.				mm		mm	
02836	3/16	125	10	231	30	4,76	10
02837	1/4	125	10	238	36	6,35	10
02838	5/16	125	10	238	36	7,94	10
02839	3/8	125	10	238	36	9,53	10
02840	7/16	125	13	246	41	11,11	10

Screwdriver SoftFinish®

Triangular socket wrench

344

Order-No.				mm			
26212	M4	125	6,8	236	30	11	10
26213	M5	125	8,3	236	30	13	10
26216	M6	125	10,05	236	30	16	10
26214	M8	125	12,05	243	36	18	10
26217	M10	125	15,05	243	36	22	10

DIN 22416.

Screwdriver SoftFinish®

Hexagon nut driver with flexible shaft

372

Order-No.			mm			
01435	5	150	261	30	8	10
01436	5,5	150	261	30	8	10
01437	6	150	261	30	9	10
01438	7	150	268	36	11	10
01439	8	150	268	36	12	10
01440	10	175	293	41	14	10
01443	13	175	293	41	19	10

Screwdriver SoftFinish®

Hexagon nut driver with round blade and hexagon head

347

Order-No.				mm			
01092	7	125	10	238	36	11,0	10
01093	8	125	10	238	36	12,0	10
01094	9	125	10	238	36	13,0	10
01095	10	125	10	238	36	14,5	10
01096	11	125	13	246	41	16,0	10
01097	12	125	13	246	41	17,0	10
01098	13	125	13	246	41	19,0	10

Screwdriver SoftFinish®

Slotted with one-piece hexagonal blade and solid steel cap

530

Order-No.	⊖		⊖	⬢	⬡	mm	
03223	3,5	75	0,6	4,0	-	186	10
03224	4,5•	90	0,8	4,0	-	201	10
03225	5,5	100	1,0	5,0	8	213	10
03226	6,5	125	1,2	6,0	10	238	10
03228	8,0	150	1,2	8,0	13	271	5
03230	10,0	175	1,6	8,0	13	296	5
03231	12,0	200	2,0	10,0	16	321	5
03232	14,0•	250	2,5	10,0	16	371	5
39845	4,5•	90	0,8	4,0	-	201	10
39846	5,5	100	1,0	5,0	8	213	10
39847	6,5	125	1,2	6,0	10	238	10
39848	8,0	150	1,2	8,0	13	271	5
39849	10,0	175	1,6	8,0	13	296	5
39851	14,0•	250	2,5	10,0	16	371	5

• Additional dimension. Non-DIN size.

Phillips with one-piece hexagonal blade and solid steel cap

531

Order-No.	⊕		⬢	⬡	mm		
03237	PH1	80	5,0	8	186	30	10
03238	PH2	100	6,0	10	213	36	10
03239	PH3	150	8,0	13	268	41	10
39838	PH1	80	5,0	8	186	30	10
39839	PH2	100	6,0	10	213	36	10
39840	PH3	150	8,0	13	268	41	10

Pozidriv with one-piece hexagonal blade and solid steel cap

532

Order-No.	⊕		⬢	⬡	mm		
03245	PZ1	80	5,0	8	186	30	10
03246	PZ2	100	6,0	10	213	36	10
03247	PZ3	150	8,0	13	268	41	10
39841	PZ1	80	5,0	8	186	30	10
39843	PZ3	150	8,0	13	268	41	10

Screwdriver SoftFinish®

Slotted with round blade and lasered mm scale

3021

Order-No.	⊖		⊖	●	mm		
36085	4,0	100	0,8	4,0	211	30	10
35397	5,5	125	1,0	5,5	236	30	10

DIN ISO 2380.

Phillips with round blade and lasered mm scale

3111

Order-No.	⊕		●	mm		Scale	
36072	PH1	80	4,5	191	30	20-70	10
35398	PH2	100	6,0	218	36	20-90	10

DIN ISO 8764-PH.

Screwdriver SoftFinish®

Slotted with fixing function

398

Order-No.	⊖		⊖	mm		
32867	2,5	75	0,4	186	30	5
32868	3,0	100	0,5	211	30	5
32869	4,0	125	0,8	243	36	5
32870	5,0	150	1,0	268	36	5
32871	6,0	175	1,2	293	36	5

Phillips with fixing function

397

Order-No.	⊕		mm		
32406	PH0	100	211	30	5
32404	PH1	125	236	36	5
32405	PH2	175	286	36	5

Which drives are used for each individual product? Page 338

Screwdriver SoftFinish®

Slotted with short round blade

302SY

Order-No.					mm		
26964	4,0	25	0,8	4,0	81	34	10
26965	5,5	25	1,0	5,5	81	34	10
26966	6,5	25	1,2	6,5	81	34	10
26967	8,0	25	1,2	8,0	81	34	10

Phillips with short round blade, Stubby

311SY

Order-No.				mm		
26968	PH1	25	4,5	81	34	10
26969	PH2	25	6,0	81	34	10
26970	PH3	25	8,0	81	34	10

Pozidriv with short round blade, Stubby

313SY

Order-No.				mm		
26971	PZ1	25	4,5	81	34	10
26972	PZ2	25	6,0	81	34	10
26973	PZ3	25	8,0	81	34	10

Screwdriver SoftFinish®

Slotted with hexagonal blade and hexagon head

308

Order-No.						mm	
00731	3,5	75	0,6	4,0	-	186	10
00732	4,5•	90	0,8	4,0	-	201	10
00733	5,5	100	1,0	5,0	8	213	10
00734	6,5	125	1,2	6,0	10	238	10
00735	7,0•	125	1,1	6,0	10	238	10
00736	8,0	150	1,2	8,0	13	268	10
00737	9,0•	150	1,4	8,0	13	268	10
00738	10,0	175	1,6	8,0	13	293	10
00739	12,0	200	2,0	10,0	16	318	10
00740	14,0•	250	2,5	10,0	16	368	10

• Additional dimension. Non-DIN size.

Phillips with hexagonal blade and hexagon head

312

Order-No.					mm		
00764	PH1	80	5,0	8	186	30	10
00765	PH2	100	6,0	10	213	36	10
00766	PH3	150	8,0	13	268	41	10
00767	PH4	200	10,0	16	318	41	10

Pozidriv with hexagonal blade and hexagon head

314

Order-No.					mm		
00776	PZ1	80	5,0	8	186	30	10
00777	PZ2	100	6,0	10	213	36	10
00778	PZ3	150	8,0	13	268	41	10
00779	PZ4	200	10,0	16	318	41	10

Square reamer

with square tip and plastic handle

300

Order-No.			mm		
00679	6,0	100	185	34	10

Awl plastic handle

with round tip and plastic handle

301

Order-No.			mm		
00683	6,0	100	185	34	10

Slotted

260P

Order-No.				mm		
42381	0,8	40	2	134	9	10
42382	1,0	40	2	134	9	10
42383	1,2	40	2	134	9	10
42384	1,5	40	2	134	9	10
42385	1,5	60	2	154	9	10
42386	1,8	40	2	134	9	10
42387	1,8	60	2	154	9	10
42388	2,0	40	2	140	18	10
42389	2,0	60	2	160	18	10
42390	2,0	100	2	200	18	10
42391	2,5	50	2,5	150	18	10
42392	2,5	75	2,5	175	18	10
42393	2,5	100	2,5	200	18	10
42394	3,0	50	3	150	18	10
42395	3,0	100	3	200	18	10
42397	3,5	60	3,5	160	18	10
42398	4,0	60	4	160	18	10
42399	4,0	100	4	200	18	10

Phillips

261P

Order-No.				mm		
42403	PH000	40	2	134	9	10
42402	PH00	40	2	134	9	10
42413	PH00	60	2	154	9	10
42401	PH0	50	3	150	18	10
42414	PH0	75	3	175	18	10
42415	PH1	60	4	160	18	10
42416	PH1	80	4	180	18	10

Pozidriv

262P

Order-No.				mm		
42418	PZ0	50	3	150	18	10
42419	PZ1	60	4	160	18	10

TORX® MagicSpring®

267PR

Order-No.				mm		
42501	T6	40	2,5	140	18	10
42502	T7	40	2,5	140	18	10
42503	T8	40	2,5	140	18	10
42504	T9	50	3	150	18	10
42505	T10	50	3	150	18	10
42506	T15	60	3,5	150	18	10

TORX®

267P

Order-No.				mm		
42474	T1	40	2,5	134	9	10
42475	T2	40	2,5	134	9	10
42476	T3	40	2,5	134	9	10
42477	T4	40	2,5	134	9	10
42478	T5	40	2,5	134	9	10
42479	T6	40	2,5	140	18	10
42480	T7	40	2,5	140	18	10
42481	T8	40	2,5	140	18	10
42482	T9	50	3	150	18	10
42483	T10	50	3	150	18	10
42484	T15	60	3,5	160	18	10
42485	T20	60	4	160	18	10

TORX PLUS®

267PIP

Order-No.				mm		
42486	4IP	40	2,5	134	9	10
42487	5IP	40	2,5	134	9	10
42488	6IP	40	2,5	140	18	10
42489	7IP	40	2,5	140	18	10
42490	8IP	40	2,5	140	18	10
42491	9IP	50	3	150	18	10
42492	10IP	50	3	150	18	10
42493	15IP	60	3,5	160	18	10
42494	20IP	60	4	160	18	10

Pentalobe

266P

Order-No.				mm		
42464	PL1	40	2,5	134	9	10
42465	PL2	40	2,5	134	9	10
42466	PL3	40	2,5	134	9	10
42467	PL4	40	2,5	134	9	10
42468	PL5	40	2,5	134	9	10
42469	PL6	40	2,5	140	18	10

Y-type

266PY

Order-No.				mm		
42470	Y000	40	2	134	9	10

PH with pivot

2611P

Order-No.				mm		
43882	PH00	40	2,5	134	9	10

Which drives are used for each individual product? Page 338

Ball end hex

264P

Order-No.			mm		
42431	1,3 (0,05")	40	134	9	10
42432	1,5	50	150	18	10
42433	2,0	50	150	18	10
42434	2,5	60	160	18	10
42435	3,0	60	160	18	10

Hex

263P

Order-No.			mm		
42420	0,70,028	40	134	9	1
42421	0,90,035	40	134	9	1
42422	1,30,05	40	134	9	1
42423	1,5	50	144	9	1
42424	2,05/64	50	150	18	1
42425	2,5	60	160	18	1
42426	3	60	160	18	1
42427	1/161/16	50	144	9	1
42428	1/81/8	60	160	18	1
42429	3/323/32	60	160	18	1
42430	7/647/64	60	160	18	1

Hexagonal ball end, inch design

264PZ

Order-No.			mm		
42436	1/16"	50	150	18	10
42440	5/64"	50	150	18	10
42438	3/32"	50	150	18	10
42441	7/64"	60	160	18	10
42437	1/8"	60	160	18	10
42442	9/64"	60	160	18	10
42439	5/32"	60	160	18	10

PicoFinish® fine screwdriver

Hex nut driver

265P

Order-No.			mm		
42443	1,5	60	160	18	10
42444	1,8	60	160	18	10
42445	2	60	160	18	10
42446	2,5	60	160	18	10
42447	3,0	60	160	18	10
42448	3,2	60	160	18	10
42449	3,5	60	160	18	10
42450	4,0	60	160	18	10
42451	4,5	60	160	18	10
42452	5	60	160	18	10
42453	5,5	60	160	18	10
42454	6	60	160	18	10
42455	7	60	160	18	10

Hexagon nut driver, inch design

265PZ

Order-No.			mm		
42459	3/32"	60	160	18	10
42462	7/64"	60	160	18	10
42457	1/8"	60	160	18	10
42463	9/64"	60	160	18	10
42460	5/32"	60	160	18	10
42458	3/16"	60	160	18	10
42461	7/32"	60	160	18	10
42456	1/4"	60	160	18	10

INFOBOX:
Pentalobe

The security profile for Apple devices.

- Ideal for repairing Apple smartphones, tablets and notebooks.
- Note: The guarantee and warranty conditions of the device manufacturer must be observed.

Lifter PicoFinish

268P

Order-No.			mm				
42507	50	3,5	150	18	1	3,5	10

Small screwdriver

Slotted transparent-red, with push-on clip

500

Order-No.				mm		
01537	3,0	40	3,0	100	11	50
01538	3,0	60	3,0	120	11	50
01539	3,0	80	3,0	140	11	50

Small screwdriver

Slotted transparent-yellow

509

Order-No.				mm		
01548	2,0	40	2,0	85	8	50

Magnetiser

400 10

Order-No.	SB	
01508		5
02568	x	5

SoftFinish® universal scraper

430

Order-No.	
23159	5

SoftFinish® universal scraper set

12-pcs. in blister pack

SB 430 4010

Order-No.	
26920	1

Replacement blade set, 13 mm wide

10-pcs. for universal scraper in blister pack

SB 430 40 K10

Order-No.	
27606	5

Which drives are used for each individual product? Page 338

Screwdriver MicroFinish®

Slotted, Phillips with one-piece hexagonal blade and solid steel cap, 5-pcs.

5533

Best.-Nr.		
29138		1
⊖	5,5 x 100 / 6,5 x 125 / 8,0 x 150	
⊕	PH1 x 80 / PH2 x 100	

Slotted, Pozidriv with one-piece hexagonal blade and solid steel cap, 5-pcs.

5533

Best.-Nr.		
29139		1
⊖	5,5 x 100 / 6,5 x 125 / 8,0 x 150	
⊕	PZ1 x 80 / PZ2 x 100	

INFOBOX:
Wiha MicroFinish screwdriver

The specialist for wet and oily applications.

- Due to the micro-fine surface structure of the screwdriver handle, the user can gain an optimal hold, even with oily or wet hands.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

Screwdriver MicroFinish®

TORX® with round blade

5527

Order-No.				mm		
29162	T10	80	4,0	192	30	10
29163	T15	80	4,0	192	30	10
29164	T20	100	4,0	212	30	10
29165	T25	100	4,5	212	30	10

Screwdriver MicroFinish®

Slotted with one-piece hexagonal blade and solid steel cap

5533

Order-No.	⊖					mm	
29133	4,5•	90	0,8	4,0	-	201	10
29134	5,5	100	1,0	5,0	8	213	10
29135	6,5	125	1,2	6,0	10	238	10
29136	8,0	150	1,2	8,0	13	271	10
29137	10,0•	175	1,6	8,0	13	296	5

• Additional dimension. Non-DIN size.
DIN 5265, ISO 2380.

Phillips with one-piece hexagonal blade and solid steel cap

5534

Order-No.	⊕				mm		
29149	PH1	80	5,0	8	187	30	10
29150	PH2	100	6,0	10	214	36	10
29151	PH3	150	8,0	13	271	41	10

DIN ISO 8764-PH.

Pozidriv with one-piece hexagonal blade and solid steel cap

5535

Order-No.					mm		
29158	PZ1	80	5,0	8	187	30	10
29159	PZ2	100	6,0	10	214	36	10

DIN ISO 8764-PZ.

Screw extractor set

Hex, 8-pcs. with spiral drill bit in box

405

Order-No.		
03988		10
	2,3 / 2,8 / 3,4 / 4,5 / 5,7 / 6,8 / 9,0 / 11,0 /	
	2,0 / 2,5 / 3,0 / 4 / 5 / 6 / 8 / 10	

Screw extractor

405

Order-No.		mm		
03847	2,0	85	6,0	10
03848	2,5	85	6,0	10
03849	3,0	85	6,0	10
03850	4	85	6,0	10
03851	5	85	6,0	10
03852	6	95	8,0	10
03853	8	95	10,0	10
03854	10	110	12,0	10

Twist drill

405

Order-No.		mm	
06725	2,3	53	10
06726	2,8	51	10
06727	3,4	70	10
06728	4,5	80	10
06729	5,7	93	10
06730	6,8	109	10
06731	9,0	117	10
06732	11,0	142	10

Screwdriver set SoftFinish® ESD

Slotted, Phillips 5-pcs.

302ESD

Best.-Nr.		
27252		1
	3,0 x 100 / 4,0 x 100	
	PH0 x 60 / PH1 x 80 / PH2 x 100	

IEC 61340-5-1.

TORX® 5-pcs.

362ESD

Best.-Nr.		
27253		1
	T6 x 60 / T8 x 60 / T9 x 60 / T10 x 80 / T15 x 80	

IEC 61340-5-1.

INFOBOX:

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Which drives are used for each individual product? Page 338

Screwdriver SoftFinish® ESD

Slotted

302ESD

Order-No.					mm		
08179	2,5	75	0,4	2,5	179	23	10
27150	3,0	100	0,5	3,0	204	23	10
27151	4,0	100	0,8	4,0	211	30	10
08182	5,5	125	1,0	5,5	236	30	10
08183	6,5	150	1,2	6,0	268	36	10

IEC 61340-5-1.

Phillips

311ESD

Order-No.				mm		
08184	PH0	60	3,0	164	23	10
08185	PH1	80	4,5	191	30	10
08186	PH2	100	6,0	218	36	10

IEC 61340-5-1.

Pozidriv

313ESD

Order-No.				mm		
26928	PZ0	60	3,0	164	23	10
26929	PZ1	80	4,5	191	30	10

IEC 61340-5-1.

TORX®

362ESD

Order-No.				mm		
31432	T3	60	2,5	164	23	10
27148	T4	60	2,5	164	23	10
27641	T5	60	3,5	164	23	10
27149	T6	60	3,5	164	23	10
31901	T7	60	3,5	164	23	10
22436	T8	60	3,5	164	23	10
27145	T9	60	4,0	171	30	10
27144	T10	80	4,0	191	30	10
27146	T15	80	4,0	191	30	10
27147	T20	100	4,0	218	36	10

IEC 61340-5-1.

Fine screwdriver set PicoFinish® ESD

Slotted, Phillips, 6 pcs. with holder

270P

Best.-Nr.		
43707		1
	1,5 x 0,23 / 2,0 x 0,4 / 2,5 x 0,4 / 3 x 0,5	
	PH 0 x 50 / PH 00 x 40	

TORX®, 6 pcs. with holder

277P

Best.-Nr.		
43708		1
	5 x 40 / 6 x 40 / 7 x 40 / 8 x 40 / 10 x 50 / 15 x 60	

Fine screwdriver PicoFinish® ESD

Slotted

270P

Order-No.					mm		
43669	1,5	0,23	40	2	134	9	10
43670	2,0	0,4	40	2	140	18	10
43671	2,5	0,4	50	2,5	150	18	10
43672	3	0,5	50	3	150	18	10
43673	3,5	0,6	60	3,5	160	18	10
43674	4	0,8	60	4	160	18	10

Phillips

271P

Order-No.				mm		
43675	PH 000	40	2	134	9	10
43676	PH 00	40	2	134	9	10
43677	PH 0	50	3	150	18	10
43678	PH 1	60	4	160	18	10

Hex

273P

Order-No.				mm	
43679	0,7	40	2,5	134	10
43680	0,9	40	2,5	134	10
43681	1,3	40	2,5	134	10
43682	1,5	50	2,5	144	10
43683	2	50	3	150	10
43684	2,5	60	3	160	10
43685	3	60	4	160	10

Hex nut driver

275P

Order-No.			mm		
43686	2,5	60	160	18	10
43687	3	60	160	18	10
43688	3,5	60	160	18	10
43689	4	60	160	18	10
43690	5	60	160	18	10
43691	5,5	60	160	18	10

Pentalobe

276P

Order-No.				mm		
43692	PL 1	40	2,5	134	9	10

Y-type

276PY

Order-No.				mm		
43693	Y000	40	2	134	9	10

TORX®

277P

Order-No.				mm		
43694	1	40	2,5	134	9	10
43695	2	40	2,5	134	9	10
43696	3	40	2,5	134	9	10
43697	4	40	2,5	134	9	10
43698	5	40	2,5	134	9	10
43699	6	40	2,5	140	18	10
43700	7	40	2,5	140	18	10
43701	8	40	2,5	140	18	10
43702	9	50	3	150	18	10
43703	10	50	3	150	18	10
43704	15	60	3,5	150	18	10
43705	20	60	4	150	18	10

Lifter PicoFinish® ESD

278P

Order-No.			mm		
43706	50	3,5	150	18	10

Which drives are used for each individual product? Page 338

wiha

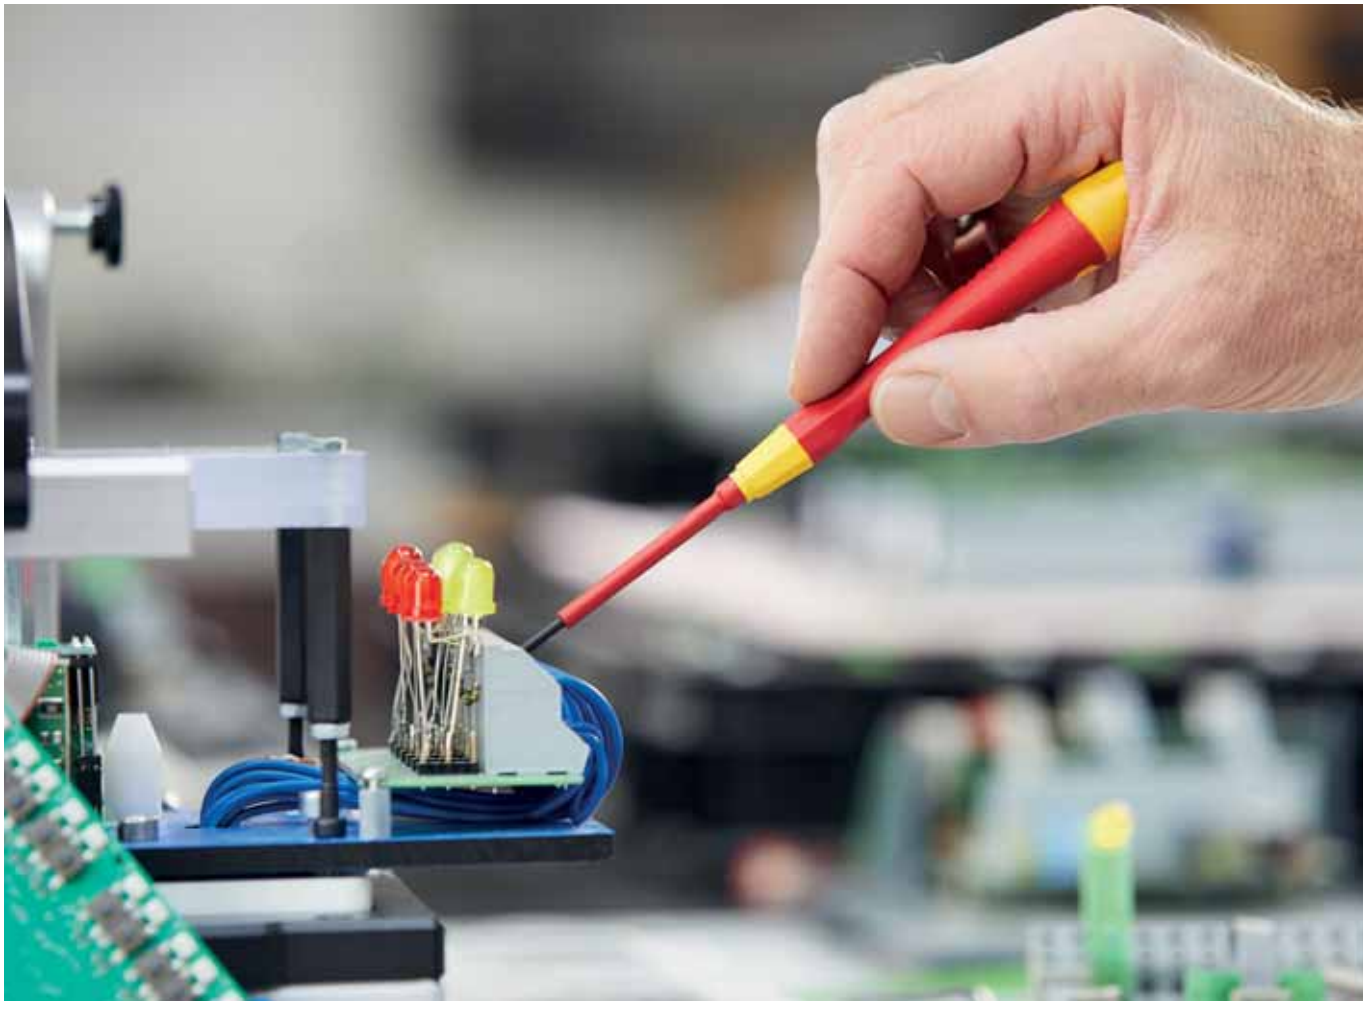

Torque tools
Controlled power for greater security.

The correct torque prevents damage to materials, eliminates the need for retouching and protects against warranty claims. This makes fully certified Wiha torque tools essential for mechanics, electricians and electronics technicians as they combine precision with security: with a release accuracy of +/–6 % for the pre-set scale value, Wiha torque screwdrivers satisfy standard precision requirements.

Torque tools with fixed settings increase process reliability while tools with variable settings are particularly ideal for mobile use. A special interchangeable blade system offers interchangeable blades with different drives. Guaranteed individual item testing using the manufacturer's inspection process and individual item marking with an identification number attest to the high quality and manufacturing standard of the tools.

Application

Torque tools

For applications in electrics

Torque screwdriver set TorqueVario®-S electric, Mixed, variably adjustable torque limit, 18 pcs. in folding bag
Page 194

Torque screwdriver TorqueVario®-S electric, Variable torque limit settings
Page 195

Torque adapter easyTorque electric
Page 196

Torque screwdriver with T-handle TorqueVario®-S T electric, Variable torque limit settings
Page 200

For applications in mechanics

Torque screwdriver iTorque® with digital scale
Page 201

Torque screwdriver set TorqueVario®-S, mixed, 13 pcs., variably adjustable torque limit, 0.8–5.0 Nm in box
Page 202

Torque screwdriver TorqueVario®-S, Variable torque limit settings
Page 202

Torque screwdriver TorqueFix®, permanently pre-set torque limit
Page 203

Torque screwdriver with T-handle set TorqueVario®-S T, mixed, 11 pcs., variably adjustable torque limit, 5–14 Nm in box
Page 206

Torque screwdriver with T-handle TorqueVario®-S T, Variable torque limit settings
Page 206

For applications in electronics

Torque screwdriver set TorqueVario®-S ESD, mixed, 13 pcs., variably adjustable torque limit, 0,4-1,0 Nm in box
Page 209

Torque screwdriver TorqueVario®-S ESD, Variable torque limit settings
Page 209

Mixed, variably adjustable torque limit, 18 pcs. in folding bag **2872 T18**

Order-No.		
36791		1
	1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, VDE and GS tested / 0,8-5,0 Nm	
	1 x Adjusting tool for torque screwdriver with long handle	
	1 x Adapter TorqueVario-S electric for slimBits	
	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5	
	1 x PH1 / 1 x PH2	
	1 x PZ1 / 1 x PZ2	
	1 x SL/PZ1 / 1 x SL/PZ2	
	1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

INFOBOX:
VDE-certified tools

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task
- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.
This is achieved by complying with the five safety rules:
- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

Which drives are used for each individual product? Page 338

Torque screwdriver set TorqueVario®-S electric

Mixed, variably adjustable torque limit, 13 pcs. in folding bag

2872 T13

Order-No.		
40674		1
○	1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, VDE and GS tested / 0,8-5,0 Nm	
	1 x Adjusting tool for torque screwdriver with long handle	
○	1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits, VDE and GS tested	
○	1 x Adapter TorqueVario-S electric for slimBits	
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5	
⊕	1 x PH1 / 1 x PH2	
⊛	1 x PZ1 / 1 x PZ2	
⊛	1 x SL/PZ1 / 1 x SL/PZ2	

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

Torque screwdriver set TorqueVario®-S electric

PlusMinus/Pozidriv variably settable torque limit 5-pcs.

2872 S3

Order-No.		
38074		1
○	1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, VDE and GS tested / 0,8-5,0 Nm	
	1 x Adjusting tool for torque screwdriver with long handle	
○	1 x Adapter TorqueVario-S electric for slimBits	
⊛	1 x SL/PZ1 / 1 x SL/PZ2	

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

Torque screwdriver TorqueVario®-S electric

○ **Variable torque limit settings**

2872

Order-No.	Nm	±%	○			
26625	0,5-2,0	6 %	3,8	131	30	1
26626	0,8-5,0	6 %	3,8	138	36	1
26627	2,0-7,0	6 %	3,8	142	41	1

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

Torque set easyTorque adapter electric

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack **29701 080 S4**

Best.-Nr.	
41476	1
	1 x 0,8 Nm
	1 x SL/PZ1 / 1 x SL/PZ2
	1 x SoftFinish® electric screwdriver handle

Manufactured acc. to IEC 60900.

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack **29701 200 S4**

Best.-Nr.	
41477	1
	1 x 2,0 Nm
	1 x SL/PZ1 / 1 x SL/PZ2
	1 x SoftFinish® electric screwdriver handle

Manufactured acc. to IEC 60900.

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack **29701 280 S4**

Best.-Nr.	
41478	1
	1 x 2,8 Nm
	1 x SL/PZ1 / 1 x SL/PZ2
	1 x SoftFinish® electric screwdriver handle

Manufactured acc. to IEC 60900.

Torque set easyTorque adapter electric

for slimBits and slimVario® holder, 5-pcs. in blister pack **29701 S5**

Order-No.	
41479	1
	1 x 0,8 Nm / 1 x 2,0 Nm / 1 x 2,5 Nm / 1 x 2,8 Nm / 1 x 4,0 Nm

Manufactured acc. to IEC 60900.

Torque adapter easyTorque electric

for slimBits and slimVario® holder in blister **2970**

Order-No.	Nm	±%			
41341	0,8	10 %	59	5,5	1
41342	2,0	10 %	59	5,5	1
41343	2,5	10 %	59	5,5	1
41344	2,8	10 %	59	5,5	1
41345	4,0	10 %	59	5,5	1

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

slimBit electric bit set

assorted with slimBit holder, 7-pcs. **2879 B7**

Order-No.	
36079	1
	1 x Adapter TorqueVario-S electric for slimBits
	1 x 4,0 / 1 x 5,5
	1 x PH1 / 1 x PH2
	1 x PZ1 / 1 x PZ2

Manufactured acc. to IEC 60900.

Adapter TorqueVario-S electric

for slimBits **28799**

Order-No.			mm		
35870	6	3,8	170	13	10

Manufactured acc. to IEC 60900.

Adapter TorqueVario-S electric

for 1/4" nut driver **28799**

Order-No.			mm		
43128	1/4"	3,8	178	12	10

Manufactured acc. to IEC 60900.

INFOBOX:
slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

slimBit electric bit set

Slotted, 6-pcs. in SlimBit box **2831**

Best.-Nr.	
43152	6
	1 x 2,0 / 1 x 2,5 / 1 x 3,5 / 1 x 4,0 / 1 x 5,5 / 1 x 6,5

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box **2831**

Best.-Nr.	
43153	6
	1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box **2831**

Best.-Nr.	
43154	6
	1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15

Manufactured acc. to IEC 60900.

TORX PLUS®, 6-pcs. in SlimBit box

2831

Best.-Nr.	
43155	6
	1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 10IP / 1 x 15IP

Manufactured acc. to IEC 60900.

Hex, 6-pcs. in SlimBit box

2831

Best.-Nr.	
43156	6
	1 x 2 / 1 x 2,5 / 1 x 3 / 1 x 4 / 1 x 5 / 1 x 6

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs. in SlimBit box

2831

Best.-Nr.	
43157	6
	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5
	1 x PZ1 / 1 x PZ2

Manufactured acc. to IEC 60900.

Slotted, PlusMinus/Pozidriv 6-pcs. in SlimBit box

2831

Best.-Nr.	
43158	6
	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5
	1 x SL/PZ1 / 1 x SL/PZ2

Manufactured acc. to IEC 60900.

Slotted, Phillips 6-pcs. in SlimBit box

2831

Best.-Nr.	
43159	6
	1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x 6,5
	1 x PH1 / 1 x PH2

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv 6-pcs. in SlimBit box

2831

Best.-Nr.	
43160	6
	1 x 2,0 / 1 x 2,5
	1 x PH0 / 1 x PH1
	1 x PZ0 / 1 x PZ1

Manufactured acc. to IEC 60900.

slimBit electric bit set

1000 V IEC 60900

TORX®, TORX PLUS®, 12-pcs. in SlimBit box

2831

Best.-Nr.	
43161	6
	1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 10IP / 1 x 15IP
	1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15
	1 x slimBit-Box empty, 2-pcs. with belt clip

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv, TORX® 12-pcs. in SlimBit box

2831

Best.-Nr.	
43162	6
	1 x 3,5 / 1 x 5,5
	1 x PH1 / 1 x PH2
	1 x PZ1 / 1 x PZ2
	1 x SL/PZ1 / 1 x SL/PZ2
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25
	1 x slimBit-Box empty, 2-pcs. with belt clip

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

slimBit electric bit

Slotted

283110

Order-No.	⊖	mm	⊖	◉	max. Nm	
43114	1,5•	75	0,4	6,0	0,4	5
43115	2,0•	75	0,4	6,0	0,4	5
34578	2,5•	75	0,4	6,0	0,4	5
34579	3,0•	75	0,5	6,0	0,6	5
41159	3,5	75	0,6	6,0	1,4	5
34580	4,0	75	0,8	6,0	2,5	5
34581	5,5	75	1,0	6,0	3,8	5
34582	6,5	75	1,2	6,0	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

Phillips

283111

Order-No.	⊕	mm	◉	max. Nm	
43116	PH0•	75	6,0	0,4	5
34583	PH1	75	6,0	3,8	5
34584	PH2	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

Pozidriv

283112

Order-No.	⊕	mm	◉	max. Nm	
43117	PZ0•	75	6,0	0,5	5
34585	PZ1	75	6,0	3,8	5
34586	PZ2	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

283113

Order-No.	⊕	mm	◉	max. Nm	
34587	SL/PH1	75	6,0	3,8	5
34588	SL/PH2	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

283114

Order-No.	⊕	mm	◉	max. Nm	
34589	SL/PZ1	75	6,0	3,8	5
34590	SL/PZ2	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

TORX®

283115

Order-No.	✱	mm	◉	max. Nm	
43140	T5•	75	6,0	0,4	5
43141	T6•	75	6,0	0,4	5
43142	T7•	75	6,0	0,4	5
35506	T8•	75	6,0	1,3	5
41160	T9•	75	6,0	1,3	5
35507	T10•	75	6,0	3,8	5
35508	T15	75	6,0	5,0	5
35509	T20	75	6,0	5,5	5
36071	T25	75	6,0	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

Hex

283118

Order-No.	◉	mm	◉	max. Nm	
37222	1,5•	75	6,0	0,9	5
37223	2•	75	6,0	1,8	5
37224	2,5	75	6,0	3,8	5
37147	3	75	6,0	5,5	5
37225	4	75	6,0	5,5	5
37226	5	75	6,0	5,5	5
37227	6	75	6,0	5,5	5

• no slim version
Manufactured acc. to IEC 60900.

Square

283117

Order-No.	■	■	mm	◉	max. Nm	
35510	#1	2,3	75	6,0	5,5	5
35511	#2	2,8	75	6,0	5,5	5

Manufactured acc. to IEC 60900.

Torque screwdriver with T-handle TorqueVario®-S T electric

Nm ±6%

1000 V IEC 60900

Variable torque limit settings

2933

Order-No.	Nm	±%				
43177	5-14	6	6	56	120	1

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

Interchangeable electric blade

SLIM

1000 V IEC 60900

TORX® for torque screwdriver with T-handle electric

283795

Order-No.		mm		max. Nm	
38931	T15	136	35	5,5	10
38932	T20	136	35	10	10
38933	T25	136	35	15	10
38934	T27	136	35	15	10
38935	T30	136	35	20	10
38936	T40	136	35	20	10

Manufactured acc. to IEC 60900.

Interchangeable electric blade

SLIM

1000 V IEC 60900

Hex for torque screwdriver with T-handle electric

283793

Order-No.		mm		max. Nm	
38918	3,0	136	35	5,5	10
38919	4,0	136	35	15	10
38920	5,0	136	35	20	10
38921	6,0	136	35	20	10

Manufactured acc. to IEC 60900.

Interchangeable electric blade

1000 V IEC 60900

Hex nut driver for torque screwdriver with T-handle electric

283794

Order-No.		mm	max. Nm	
38925	7,0	136	5	10
38926	8,0	136	10	10
38927	9,0	136	14	10
38928	10,0	136	17	10
38929	13,0	136	20	10
38930	17,0	136	20	10

Manufactured acc. to IEC 60900.

INFOBOX:

Torque T-handle TorqueVario®-S T electric

Torque T-handle TorqueVario®-S T electric

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the adjusting tool.
- More fastening power thanks to T-handle design.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades

Which drives are used for each individual product? Page 338

Adjusting tool

for torque screwdriver with T-handle **2899**

Order-No.		mm	
28691	90	146	1

Torque screwdriver iTorque®

product design award 2013

reddot design award winner 2013

with digital scale **28352**

Order-No.	Nm		±%				
36886	0,4-1,5	60-210 in.oz	6%	4	134	34	1
36887	0,8-3,0	7-26 in.lbs	6%	4	134	34	1
36888	1,0-5,0	9-44 in.lbs	6%	4	134	40	1

DIN EN ISO 6789.

INFOBOX:
iTorque

The intelligent torque tool.

- Required torque can be adjusted and set on the handle without the need for a separate tool.
- Large numerical display simplifies reading.
- ClickControl records every use and optimises the monitoring of measuring instruments.
- Calibration alarm after 5,000 applications for absolute process safety.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.
- Units can be switched (Nm » in.lb/ cNm » in.oz)
- Can be recalibrated

Torque screwdriver set TorqueVario®-S

mixed, 13 pcs., variably adjustable torque limit, 0.8–5.0 Nm in box

2852 S10

Best.-Nr.	
26893	1
	Torque screwdriver TorqueVario®-S Variable torque limit settings / 0,8-5,0 Nm
	Bit holder clamping with ball for torque screwdriver with long handle
	Adjusting tool for torque screwdriver with long handle
	PH1 x 25 / PH2 x 25
	PZ1 x 25 / PZ2 x 25
	T10 x 25 / T15 x 25 / T20 x 25 / T25 x 25
	3,0 x 25 / 4,0 x 25

DIN EN ISO 6789.

TORX®, TORX PLUS®, 13 pcs., variably adjustable torque limit, 0.8–5.0 Nm in box

2852 S10-01

Best.-Nr.	
34614	1
	Torque screwdriver TorqueVario®-S Variable torque limit settings / 0,8-5,0 Nm
	Bit holder clamping with ball for torque screwdriver with long handle
	Adjusting tool for torque screwdriver with long handle
	T7 x 25 / T8 x 25 / T9 x 25 / T10 x 25 / T15 x 25
	7IP x 25 / 8IP x 25 / 9IP x 25 / 10IP x 25 / 15IP x 25

DIN EN ISO 6789.

Torque screwdriver TorqueVario®-S

Variable torque limit settings

2852

Order-No.	Nm	±%				
36849	0,04-0,46•	10%	4	127	23	1
26888	0,1-0,6	10%	4	127	23	1
36850	0,1-0,6	6%	4	127	23	1
26461	0,4-1,0	6%	4	127	23	1
26462	0,5-2,0	6%	4	131	30	1
26463	0,8-5,0	6%	4	138	36	1
26464	2,0-7,0	6%	4	142	41	1

• Precision in range of 0.1-0.46 Nm.
DIN EN ISO 6789.

INFOBOX:
TorqueVario®-S

Variably settable torque tools.

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the torque setter adjusting tool.
- Distinctly audible and perceptible click signal when set toque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.

Which drives are used for each individual product? Page 338

Torque screwdriver TorqueFix®

permanently pre-set torque limit

2850

Order-No.	Nm	±%				
26925	0,4	6%	4	112	23	1
26127	0,5	6%	4	112	23	1
26047	0,6	6%	4	112	23	1
26327	0,8	6%	4	112	23	1
26048	0,9	6%	4	112	23	1
26133	1,1	6%	4	119	30	1
26049	1,2	6%	4	119	30	1
26901	1,5	6%	4	119	30	1
26051	2,0	6%	4	119	30	1
26128	2,5	6%	4	119	30	1
26052	3,0	6%	4	126	36	1
26129	3,8	6%	4	126	36	1
26053	5,0	6%	4	132	41	1
26130	5,5	6%	4	132	41	1
34533	6,0	6%	4	132	41	1
26131	7,2	6%	4	132	41	1

DIN EN ISO 6789.

Torque screwdriver set TorqueFix®

Cable key for circular plug connector permanently pre-set torque limit 2-pcs.

2850

Order-No.	Nm		mm				
36846	0,4	9	230	78	112	23	1
36847	0,6	13	230	78	112	23	1

DIN EN ISO 6789.

Torque screwdriver easyTorque

permanently pre-set torque limit

2920

Order-No.	Nm	±%				
36229	0,5	10%	4	130	34	1
36230	0,6	10%	4	130	34	1
36240	0,9	10%	4	130	34	1
36231	1,1	10%	4	130	34	1
36233	1,2	10%	4	130	34	1
36234	1,4	10%	4	130	34	1
36235	2,0	10%	4	130	34	1
36236	2,5	10%	4	130	34	1
36237	3,0	10%	4	130	34	1
36238	3,8	10%	4	130	34	1
36320	4,0	10%	4	130	34	1
36321	4,5	10%	4	130	34	1
36239	5,0	10%	4	130	34	1

INFOBOX:
TorqueFix®

Permanently pre-set torque tools.

- For controlled fastening, e.g. in series production or repetitive usage.
- Distinctly audible and perceptible click signal when set toque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.
- Broad selection of interchangeable blades and adapter blades.

Interchangeable blade

Slotted for torque screwdriver with long handle

28590

Order-No.				mm		max. Nm	
26227	0,25	1,5	4	175	42	0,15	10
26228	0,4	2,0	4	175	42	0,4	10
26151	0,4	2,5	4	175	42	0,4	10
26277	0,5	3,0	4	175	42	0,6	10
26278	0,6	3,5	4	175	42	1,1	10
26279	0,8	4,0	4	175	42	2,5	10

Blade tip DIN ISO 2380-1.

Phillips for torque screwdriver with long handle

28591

Order-No.			mm		max. Nm	
26199	PH000	4	175	42	0,4	10
26196	PH00	4	175	42	0,4	10
26197	PH0	4	175	42	0,9	10
26058	PH1	4	175	42	3,8	10
27079	PH2	4	175	42	5,5	10

Blade tip DIN ISO 8764-1.

Pozidriv for torque screwdriver with long handle

28592

Order-No.			mm		max. Nm	
26198	PZ0	4	175	42	0,9	10
26148	PZ1	4	175	42	3,8	10
26889	PZ2	4	175	42	5,5	10

Blade tip DIN ISO 8764-1.

TORX® MagicSpring® for torque screwdriver with long handle

28595R

Order-No.			mm		max. Nm	
27818	T6	4	175	42	0,6	10
27812	T7	4	175	42	0,9	10
27813	T8	4	175	42	1,3	10
27814	T9	4	175	42	2,5	10
27815	T10	4	175	42	3,8	10
27816	T15	4	175	42	5,5	10
27817	T20	4	175	42	8,0	10
29467	T25	4	175	42	8,0	10

TORX® for torque screwdriver with long handle

28595

Order-No.			mm		max. Nm	SB	
30852	T4	4	175	42	0,25		10
26158	T5	4	175	42	0,4		10
26064	T6	4	175	42	0,6		10
26065	T7	4	175	42	0,9		10
26066	T8	4	175	42	1,3		10
26059	T9	4	175	42	2,5		10
26067	T10	4	175	42	3,8		10
26068	T15	4	175	42	5,5		10
26069	T20	4	175	42	8,0		10
26070	T25	4	175	42	8,0		10

TORX PLUS® MagicSpring® for torque screwdriver with long handle

28596R

Order-No.			mm		max. Nm	
29553	6IP	4	175	42	0,8	10
29554	7IP	4	175	42	1,3	10
29555	8IP	4	175	42	2,0	10
29556	9IP	4	175	42	3,0	10
29557	10IP	4	175	42	4,5	10
29558	15IP	4	175	42	6,6	10
29559	20IP	4	175	42	8,0	10
29560	25IP	4	175	42	8,0	10

TORX PLUS® for torque screwdriver with long handle

28596

Order-No.			mm		max. Nm	SB	
26159	5IP	4	175	42	0,5		10
26071	6IP	4	175	42	0,8		10
26152	7IP	4	175	42	1,3		10
26072	8IP	4	175	42	2,0		10
26154	9IP	4	175	42	3,0		10
26155	10IP	4	175	42	4,5		10
26073	15IP	4	175	42	6,6		10
26156	20IP	4	175	42	8,0		10
26157	25IP	4	175	42	8,0		10

Hexagonal ball end for torque screwdriver with long handle

28597

Order-No.			mm		max. Nm	
26221	1,5	4	175	42	0,4	10
26222	2,0	4	175	42	0,9	10
26223	2,5	4	175	42	2,0	10
26224	3,0	4	175	42	3,8	10
26225	4,0	4	175	42	8,0	10

Which drives are used for each individual product? Page 338

Hexagon for torque screwdriver with long handle

28593

Order-No.			mm		max. Nm	
26544	1,3	4	175	42	0,4	10
26200	1,5	4	175	42	0,9	10
26060	2,0	4	175	42	1,8	10
26061	2,5	4	175	42	3,8	10
26062	3,0	4	175	42	5,5	10
26063	4,0	4	175	42	8,0	10

Adapter blade

internal square for torque screwdriver with long handle

285992

Order-No.			mm	
26229	1/4	4	155	10

Cable key for circular plug connector

Hexagon head for torque screwdriver with long handle

28594

Order-No.				mm	max. Nm	
36414	8	4	78	218	1	10
36415	9	4	78	218	1	10
36417	13	4	78	218	1,5	10
36418	14	4	78	218	1,5	10
36421	18	4	78	218	1,5	5

Bit holder clamping with ball

for torque screwdriver with long handle

285994

Order-No.			mm		
27526	1/4	4	162	11	10

Adjusting tool

for torque screwdriver with long handle

2859

Order-No.	mm		
26864	146	90	1

INFOBOX:
MagicSpring®

Wiha TORX® MagicSpring®

- TORX® and TORX PLUS® screws are held securely in place.
- An innovation, which will benefit each user.

INFOBOX:
Ball end hex

Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

Torque screwdriver with T-handle set TorqueVario®-S T

mixed, 11 pcs., variably adjustable torque limit, 5–14 Nm in box

2893 S01

Order-No.		
29234		1
○	Torque screwdriver with T-handle TorqueVario®-S T Variable torque limit settings / 5-14 Nm	
	Adjusting tool for torque screwdriver with T-handle	
▣	Adapter blade for torque screwdriver with T-handle 1/4" / Adapter blade for torque screwdriver with T-handle 3/8" /	
○	Bit holder for torque screwdriver with T-handle	
✱	T25 x 25 / T30 x 25 / T40 x 25	
●	4,0 x 25 / 5,0 x 25 / 6,0 x 25	

DIN EN ISO 6789.

Torque screwdriver with T-handle TorqueVario®-S T

○ **Variable torque limit settings**

2893

Order-No.	Nm	±%	○			
29233	5-14	6%	6	56	120	1

DIN EN ISO 6789.

Torque screwdriver with T-handle TorqueFix® T

○ **permanently pre-set torque limit**

2891

Order-No.	Nm	±%	○			
29228	6	6%	6	56	120	1
29229	8	6%	6	56	120	1
29230	10	6%	6	56	120	1
29231	12	6%	6	56	120	1
29236	12,5	6%	6	56	120	1
29232	14	6%	6	56	120	1

DIN EN ISO 6789.

Which drives are used for each individual product? Page 338

Interchangeable blade

TORX® for torque screwdriver with T-handle

28995

Order-No.			mm		max. Nm	max. in.lbs.	
28734	T15	6	130	53	5,5	49	10
28735	T20	6	130	53	10	88	10
28736	T25	6	130	53	15	132	10
28737	T27	6	130	53	15	132	10
28738	T30	6	130	53	15	132	10
28739	T40	6	130	53	15	132	10

TORX PLUS® for torque screwdriver with T-handle

28996

Order-No.			mm		max. Nm	max. in.lbs.	
28740	15IP	6	130	53	6,6	59	10
28741	20IP	6	130	53	13	115	10
28742	25IP	6	130	53	15	132	10
28743	27IP	6	130	53	15	132	10
28744	30IP	6	130	53	15	132	10
28745	40IP	6	130	53	15	132	10

Hex for torque screwdriver with T-handle

28993

Order-No.			mm		max. Nm	max. in.lbs.	
28746	3	6	130	53	5,5	49	10
28747	4	6	130	53	15	132	10
28748	5	6	130	53	15	132	10
28749	6	6	130	53	15	132	10

Adapter blade

for torque screwdriver with T-handle

28999

Order-No.			mm		
28756	1/4	6	120	53	10
28757	3/8	6	120	53	10

Bit holder

for torque screwdriver with T-handle

28999

Order-No.			mm		
28758	1/4	6	125	11	10

Adjusting tool

for torque screwdriver with T-handle

2899

Order-No.		mm	
28691	90	146	1

Torque screwdriver with key handle TorqueFix® Key

permanently pre-set torque limit

28360

Order-No.	Nm	±%				
38616	0,5	6%	4	68	50	1
38617	0,6	6%	4	68	50	1
38618	0,9	6%	4	68	50	1
38556	1,1	6%	4	68	50	1
38800	1,2	6%	4	68	50	1
38619	1,4	6%	4	68	50	1
38557	2,0	6%	4	68	50	1
38620	2,5	6%	4	68	50	1
38621	3,0	6%	4	68	50	1
38558	3,8	6%	4	68	50	1
38622	4,0	6%	4	68	50	1

DIN EN ISO 6789.

Interchangeable blade

Hexagon for torque screwdriver with key handle

283693

Order-No.			mm		max. Nm	
38801	1,5	4	75	20	0,9	10
38802	2,0	4	75	20	1,8	10
38803	2,5	4	75	20	3,8	10
38804	3,0	4	75	20	5,5	10
38805	4,0	4	75	20	8,0	10

Interchangeable blade

TORX® for torque screwdriver with key handle

283695

Order-No.			mm		max. Nm	SB	
38806	T6	4	75	20	0,6		10
38807	T7	4	75	20	0,9		10
38808	T8	4	75	20	1,3		10
38809	T9	4	75	20	2,5		10
38810	T10	4	75	20	3,8		10
38811	T15	4	75	20	5,5		10
38812	T20	4	75	20	8,0		10
38813	T25	4	75	20	8,0		10

Interchangeable blade

TORX PLUS® for torque screwdriver with key handle

283696

Order-No.			mm		max. Nm	
38814	6IP	4	75	20	0,8	10
38815	7IP	4	75	20	1,3	10
38816	8IP	4	75	20	2,0	10
38817	9IP	4	75	20	3,0	10
38818	10IP	4	75	20	4,5	10
38819	15IP	4	75	20	6,6	10
38820	20IP	4	75	20	8,0	10
38821	25IP	4	75	20	8,0	10

Which drives are used for each individual product? Page 338

Torque screwdriver set TorqueVario®-S ESD

mixed, 13 pcs., variably adjustable torque limit, 0,4-1,0 Nm in box

2882 S10

Order-No.		
43898		1
	Torque screwdriver TorqueVario®-S ESD Variable torque limit settings / 0,4-1,0 Nm	
	Bit holder clamping with ball for torque screwdriver with long handle	
	Adjusting tool for torque screwdriver with long handle	
	4,0 x 25 / 4,5 x 25	
	PH0 x 25 / PH1 x 25	
	PZ0 x 25 / PZ1 x 25	
	T4 x 25 / T5 x 25 / T6 x 25 / T8 x 25	

IEC 61340-5-1. DIN EN ISO 6789.

Torque screwdriver TorqueVario®-S ESD

Variable torque limit settings

2882

Order-No.	Nm	±%				
36851	0,04-0,46•	10%	4	127	23	1
26865	0,1-0,6	10%	4	127	23	1
36852	0,1-0,6	6%	4	127	23	1
26629	0,4-1,0	6%	4	127	23	1
26866	0,5-2,0	6%	4	131	30	1
30495	0,8-5,0	6%	4	138	36	1

• Precision in range of 0.1-0.46 Nm.
IEC 61340-5-1. DIN EN ISO 6789.

INFOBOX:
Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Overview of torque tools

Tools	Precision	Setting	Special feature	Nm range	Torque range
					0,01 Nm / 0,1 Nm / 1 Nm / 10 Nm
iTorque	± 6 %	variable	Écran digital Click control Calibration alarm Numeric scale	0,4 – 1,5 0,8 – 3,0 1,0 – 5,0	
TorqueVario®-S	± 10 % ± 6 %/± 10 % ± 6 %	variable	Numeric scale	0,04 – 0,46 0,1 – 0,6 0,4 – 1,0 0,5 – 2,0 0,8 – 5,0 2,0 – 7,0	
TorqueVario®-S ESD	± 10 % ± 6 %/± 10 % ± 6 %	variable	ESD-compliant, numeric scale	0,04 – 0,46 0,1 – 0,6 0,4 – 1,0 0,5 – 2,0 0,8 – 5,0	
TorqueFix®	± 6 %	fixed	Permanently preset in factory	16 Versions 0,4 – 7,2	
easyTorque	± 10%	fixed	Permanently preset in factory	13 Versions 0,5 – 5,0	
TorqueFix® Key	± 6 %	fixed	Permanently preset in factory	0,5 – 4,0	
easyTorque adapter	± 10%	fixed	VDE certification Permanently preset in factory	5 Versions 0,8 – 4,0	
TorqueVario®-S VDE	± 6 %	variable	VDE certification, numeric scale	0,5 – 2,0 0,8 – 5,0 2,0 – 7,0	
TorqueVario®-S T electric		variable	VDE certification, numeric scale	5 – 14	
TorqueVario®-S T	± 6 %	variable	Numeric scale	5,0 – 14	
TorqueFix®-T	± 6 %	fixed	Permanently preset in factory	6 Versions 6,0 – 14	

Which drives are used for each individual product? Page 338

Series 2859

Series 28369



slimBits
Series 2831



Series 28379

Series 2899

Multitools
Many talents in the minimum space.

Fewer tools mean less load, better handling and efficient work. The more a tool can do, the better: Wiha multitools are compact, versatile tools which save space and and reduce overall weight, making them the perfect portable companion.

In the Wiha LiftUp magazine bit holder, the most commonly used bits are neatly stored in the handle, ensuring they are always ready for use and easy to handle. The Wiha reversible blade system offers a variety of interchangeable blades, the lengths of which can be adjusted as required. The small, compact Wiha PocketStars contain the most commonly used L-keys - indispensable helpers for all equipment. The Wiha Stubby magazine combines six drive formats in one, allowing completely unrestricted access to all confined spaces thanks to its extremely short screwdriver handle.

Application Multitools

All-in-one tools

Screwdriver with bit magazine LiftUp electric
Page 214

Screwdriver with bit magazine, LiftUp 26one®
Page 214

Screwdriver with bit magazine Stubby
Page 214

Double bit set
Page 215

Multitool PocketStar®, assorted 9-pcs.
Page 217

Multitool PocketStar®, TORX® 8-pcs.
Page 217

Multitool PocketStar®, Hexagonal ball end MagicRing® 7-pcs.
Page 219

Switch cabinet key pen shape
Page 220

Nut driver insert gripper,
Page 220

Interchangeable blade sets

Screwdriver with interchangeable blade set SYSTEM 6, Mixed 11-pcs. in box
Page 221

Screwdriver with interchangeable blade set SYSTEM 6, Mixed 11-pcs. in roll-up bag
Page 221

Screwdriver with interchangeable blade set SYSTEM 6 ESD, Mixed 6-pcs. in roll-up bag
Page 223

Screwdriver with interchangeable blade set SYSTEM 4, Mixed 11-pcs. in roll-up bag
Page 225

Screwdriver with interchangeable blade set SYSTEM 4 ESD, Mixed 11-pcs. in roll-up bag
Page 227

Screwdriver with bit magazine LiftUp electric

product design award 2014

reddot award 2014 best of the best

Slotted, Phillips with 6 slimBits

2831

Order-No.	SB	
38610		5
38612	x	1
⊖ 1 x 2,5 / 1 x 3,0 / 1 x 4,0 / 1 x 5,5		
⊕ 1 x PH1 / 1 x PH2		

Manufactured acc. to IEC 60900.

Phillips, PlusMinus/Pozidriv, slotted with 6 slimBits

2831

Order-No.	SB	
38611		5
38613	x	1
⊖ 1 x 3,0 / 1 x 4,0 / 1 x 5,5		
⊕ 1 x PH1 / 1 x PH2		
⊛ 1 x SL/PZ2		

Manufactured acc. to IEC 60900.

Pozidriv, PlusMinus/Pozidriv, slotted with 6 slimBits

2831

Order-No.	SB	
41234		5
41235	x	1
⊖ 1 x 2,5 / 1 x 3,5 / 1 x 5,5		
⊛ 1 x PZ1 / 1 x PZ2		
⊛ 1 x SL/PZ2		

Manufactured acc. to IEC 60900.

TORX® with 6 slimBits

2831

Order-No.	SB	
41157		5
41158	x	1
✱ 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25		

Manufactured acc. to IEC 60900.

Screwdriver with bit magazine, LiftUp 26one®

reddot award 2017 winner

Mixed with 13 double bits in blister pack

SB 3803 04 020

Order-No.	SB	
43895	x	1
⊖ ⊖ 4,0 - 6,0 / 5,5 - 6,5		
⊕ ⊕ PH0 - PH3 / PH1 - PH2		
✱ ✱ T6 - T8 / T10 - T15 / T20 - T25 / T27 - T30		
⊛ ⊛ PZ1 - PZ2		
▣ ▣ #1 - #2		
● ● 3 - 4 / 5 - 6		

Screwdriver with bit magazine Stubby

Mixed with 7 double bits1/4"

3802

Order-No.	SB	
43613	x	5
⊖ ⊖ 4,0 x 6,0		
⊕ ⊕ PH1 x PH2		
⊛ ⊛ PZ1 x PZ2		
● ● 3 x 4 / 5 x 6		
✱ ✱ T10 x T15 / T20 x T25		

INFOBOX:
slimTECHNOLOGY

Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Which drives are used for each individual product? Page 338

Double bit set

Slotted, 10-pcs. in box — 7410Z

Ordern-No.	
43858	1
4,0 x 6,0	

Slotted, 10-pcs. in box — 7410Z

Ordern-No.	
43859	1
5,5 x 6,5	

Phillips, 10-pcs. in box — 7411Z

Ordern-No.	
43860	1
PH0 x PH3	

Phillips, 10-pcs. in box — 7411Z

Ordern-No.	
43861	1
PH1 x PH2	

Pozidriv, 10-pcs. in box — 7412Z

Ordern-No.	
43862	1
PZ0 x PZ3	

Pozidriv, 10-pcs. in box — 7412Z

Ordern-No.	
43863	1
PZ1 x PZ2	

Internal hexagon, 10-pcs. in box — 7413Z

Ordern-No.	
43864	1
3 x 4	

Internal hexagon, 10-pcs. in box — 7413Z

Ordern-No.	
43865	1
5 x 6	

TORX®, 10 pieces in box — 7415Z

Ordern-No.	
43866	1
T6 x T8	

TORX®, 10 pieces in box — 7415Z

Ordern-No.	
43867	1
T10 x T15	

TORX®, 10 pieces in box — 7415Z

Ordern-No.	
43868	1
T20 x T25	

TORX®, 10 pieces in box — 7415Z

Ordern-No.	
43869	1
T27 x T30	

Internal square, 10-pcs. in box — 7419Z

Ordern-No.	
43870	1
#1 x #2	

INFOBOX:
LiftUp 26one®

Most of the world's common drives in one tool!

- The LiftUp 26one® has 13 double bits; 12 in the magazine and 1 double bit in the bit holder.
- The bit magazine opens out at the press of a button, enabling the removal of the bits.
- Unlimited access to low-lying screws thanks to the automatically locking SuperSlim bit holder.
- Powerful screw fastening or loosening thanks to the large screwdriver handle.

Screwdriver with LiftUp 25 magnetic bit magazine

product design award 2014

reddot award 2014 best of the best

Mixed with 12 bits, 1/4" — 380302

Order-No.	SB	
38600		5
38605	x	5

1 x 4,5 / 1 x 6,5
1 x PH1 / 1 x PH2 / 1 x PH3
1 x PZ1 / 1 x PZ2 / 1 x PZ3
1 x T15 / 1 x T20 / 1 x T25 / 1 x T30

Mixed with 12 bits, 1/4" — 380302

Order-No.	SB	
38601		5
38606	x	5

1 x 5,5
1 x PH2
1 x PZ1 / 1 x PZ2 / 1 x PZ3
1 x T15 / 1 x T20 / 1 x T25 / 1 x T30
1 x 3,0 / 1 x 4,0 / 1 x 5,0

Screwdriver with bit magazine magnetic

assorted with 8 bits, 1/4" — 3809

Order-No.	SB	
32901		5
33007	x	5

1 x 6,5
1 x PH1 / 1 x PH2 / 1 x PH3
1 x PZ2
1 x T15 / 1 x T20 / 1 x T25

TORX® with 8 bits, 1/4" — 3809

Order-No.	SB	
32902		5
33008	x	5

1 x T6 / 1 x T8 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40

Slotted, Phillips with 8 bits, 1/4" — 3809

Order-No.	SB	
32903		5
33009	x	5

1 x 5,5 / 1 x 6,5
1 x PH1 / 3 x PH2 / 2 x PH3

Screwdriver with bit magazine magnetic

Slotted, Phillips with 6 bits, Stubby, 1/4" — 3801

Order-No.	SB	
33736		10
33738	x	5

1 x 4,5 / 1 x 6,5 / 1 x 8,0
1 x PH1 / 1 x PH2 / 1 x PH3

TORX® with 6 bits, Stubby, 1/4" — 3801

Order-No.	SB	
33743		10
33744	x	5

1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40

Phillips, Pozidriv with 6 bits, Stubby, 1/4" — 3801

Order-No.	SB	
33740		10
33741	x	5

1 x PH1 / 1 x PH2 / 1 x PH3
1 x PZ1 / 1 x PZ2 / 1 x PZ3

Slotted, Pozidriv with 6 bits, Stubby, 1/4" — 3801

Order-No.	SB	
33764		10
33746	x	5

1 x 4,5 / 1 x 6,5 / 1 x 8,0
1 x PZ1 / 1 x PZ2 / 1 x PZ3

Which drives are used for each individual product? Page 338

Multitool PocketStar

assorted 9-pcs. 351P

Order-No.	SB	
25293		5
25295	x	5
⊖ 4,5		
⊕ PH2		
✱ T10 / T15 / T20		
● 3 / 4 / 5 / 6		

Multitool PocketStar

TORX® 8-pcs. 363P

Order-No.	SB	
23047		5
23049	x	5
✱ T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40		

Multitool Mini PocketStar

Slotted, Phillips internal hexagon, 8-pcs. in blister pack 351P

Order-No.	SB	
27936	x	5
● 0,7 / 0,9 / 1,3 / 1,5 / 2,0		
⊖ 1,5 / 2,0		
⊕ PH00		

INFOBOX:
PocketStar

The Multitool that fits in your pocket

- Simple and easy selection of the desired key size at the touch of a button.
- Can be used as a screwdriver long handle and T-handle.
- 270° limit for safe work prevents trapped fingers.
- Covered ends on both pivot axes prevent clothing from being caught.

Multitool PocketStar

TORX® 7-pcs. **363P**

Order-No.	SB	
23051		5
23053	x	5

T7 / T8 / T9 / T10 / T15 / T20 / T25

Multitool PocketStar

TORX® Tamper Resistant (with hole) 7-pcs. **363TRP**

Order-No.	SB	
25128		5
25164	x	5

T7H / T8H / T9H / T10H / T15H / T20H / T25H

Multitool PocketStar

TORX® Tamper Resistant (with hole) 8-pcs. **363TRP**

Order-No.	SB	
25130		5
25166	x	5

T9H / T10H / T15H / T20H / T25H / T27H / T30H / T40H

INFOBOX:

TORX® tamper-resistant safety profile

- This safety profile is used to hinder unwanted access to equipment such as intercoms, thermostats and night-storage heaters.
- You can fasten the Torx® tamper resistant profile with both Torx® H screws and normal Torx® screws.

Which drives are used for each individual product? Page 338

Multitool PocketStar

Hexagonal ball end MagicRing® 7-pcs. 369RP

Order-No.	SB	
23031		5
23033	x	5
2 / 2,5 / 3 / 4 / 5 / 6 / 8		

Multitool PocketStar

Hexagon 7-pcs. 351P

Order-No.	SB	
23040		5
23041	x	5
2 / 2,5 / 3 / 4 / 5 / 6 / 8		

Multitool PocketStar

Hexagon 7-pcs. 351P

Order-No.	SB	
23035		5
23037	x	5
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6		

INFOBOX:
Ball end hex

Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

INFOBOX:
MagicRing®

Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

Switch cabinet key pen shape

1/4" in blister pack

24681

Order-No.							
39076	5-8	9	3-5	7,0	PH2	T20	1

Nut driver insert set gripper

Hexagon with ratchet 3/8" and adapter for screwdriver in blister pack 3-pcs.

24601

Order-No.	SB	
20783	x	1

Switch cabinet key cross shape



24667

Order-No.						
36114	5-8	9	3-5	7,0	PH2	1

Nut driver insert gripper

3/8" in blister pack

24601

Order-No.				mm	SB	
20554	7-19	3/8	25,4	53,5	x	1

Which drives are used for each individual product? Page 338

Screwdriver with interchangeable blade set SYSTEM 6

Mixed 11-pcs. in box

284T

Ordern-No.	
00623	1
	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
	4,0 - 6,0 / 5,5 - 6,5
	PH1 - PH2
	PZ1 - PZ2
	T10 - T15 / T20 - T25 / T30 - T40
	4 - 4 / 5 - 5 / 6 - 6

• With ball end

Screwdriver with interchangeable blade set SYSTEM 6

Mixed 11-pcs. in roll-up bag

284T

Order-No.	
03591	1
	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
	4,0 - 6,0 / 5,5 - 6,5
	PH1 - PH2
	PZ1 - PZ2
	T10 - T15 / T20 - T25 / T30 - T40
	4 - 4 / 5 - 5 / 6 - 6

• With ball end

INFOBOX:
SYSTEM 6

Screwdriver with interchangeable blades

- Flexible, versatile interchangeable blade system in industrial quality.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Desired blade length can be set (42 – 114 mm)
- Release sleeve: Blade is held in place

Screwdriver with interchangeable blade set SYSTEM 6

Mixed 6-pcs. in roll-up bag

284T

Ordern-No.	
32298	1
Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade	
4,0 - 6,0	
PH1 - PH2	
PZ1 - PZ2	
T10 - T15 / T20 - T25	

Screwdriver with interchangeable blade set SYSTEM 6

Hex nut driver, 12-pcs. in roll-up bag

284T

Order-No.	
27713	1
Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade	
4,0 - 150 / 4,5 - 150 / 5,0 - 150 / 5,5 - 150 / 6,0 - 150 / 7,0 - 150 / 8,0 - 150 / 9,0 - 150 / 10,0 - 150 / 11,0 - 150 / 13,0 - 150	

Screwdriver with interchangeable blade set SYSTEM 6

Hex nut driver, 8-pcs. in roll-up bag

284T

Order-No.	
27712	1
Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade	
5,0 - 150 / 5,5 - 150 / 6,0 - 150 / 7,0 - 150 / 8,0 - 150 / 10,0 - 150 / 13,0 - 150	

Which drives are used for each individual product? Page 338

Screwdriver with interchangeable blade set SYSTEM 6 ESD

Mixed 6-pcs. in roll-up bag — **284ESD**

Order-No.		
31497		1
○	Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 6 interchangeable blade	
⊖ ⊖	3,5 - 4,5 / 4,0 - 6,0 / 5,5 - 6,5	
⊕ ⊕	PH1 - PH2	
● ●	5 - 5	

• With ball end

Screwdriver handle SoftFinish®-telescopic

○ for SYSTEM 6 interchangeable blade — **284**

Order-No.	○	⇄	⊕	SB	
30372	6,0	120	36		5
30404	6,0	120	36	x	5

Screwdriver handle SoftFinish®-telescopic ESD

○ for SYSTEM 6 interchangeable blade — **284ESD**

Order-No.	○	⇄	⊕		
31496	6,0	120	36		5

IEC 61340-5-1.

INFOBOX:
Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Interchangeable blade SYSTEM 6

Slotted

28400

Order-No.					mm		
27627	3,5	4,5	0,6	0,8	150	6,0	5
00629	4,0	6,0	0,8	1,0	150	6,0	5
00630	5,5	6,5	1,0	1,2	150	6,0	5

Slotted, Phillips

28401

Order-No.				mm		
00665	4,0	PH1	0,8	150	6,0	5
00666	6,0	PH2	1,0	150	6,0	5
00667	6,5	PH3	1,2	150	6,0	5

Phillips

28411

Order-No.			mm		
00631	PH1	PH2	150	6,0	5
27628	PH2	PH3	150	6,0	5

Pozidriv

28422

Order-No.			mm		
00632	PZ1	PZ2	150	6,0	5
27629	PZ2	PZ3	150	6,0	5

TORX®

28455

Order-No.			mm		
00654	T6	T8	150	6,0	5
00655	T7	T9	150	6,0	5
00656	T10	T15	150	6,0	5
00657	T20	T25	150	6,0	5
00658	T30	T40	150	6,0	5

TORX® Tamper Resistant (with hole)

284TR

Order-No.			mm		
27630	T6H	T8H	150	6,0	5
27631	T7H	T9H	150	6,0	5
27632	T10H	T15H	150	6,0	5
27633	T20H	T25H	150	6,0	5
27634	T30H	T40H	150	6,0	5

Ball end hex

28437

Order-No.			mm		
00635	2,5	2,5	150	6,0	5
00636	3	3	150	6,0	5
00637	4•	4	150	6,0	5
00638	5•	5	150	6,0	5
00639	6•	6	150	6,0	5

Torq-Set®

284TS

Order-No.			mm		
27635	TS2	TS4	150	6,0	5
27636	TS6	TS8	150	6,0	5

Tri-Wing® 1/4"

284TW

Order-No.			mm		
27637	TW0	TW1	150	6,0	5
27638	TW2	TW3	150	6,0	5
27639	TW4	TW5	150	6,0	5

Interchangeable blade SYSTEM 6

Hex nut driver

2844

Order-No.		mm		
08900	4,0	150	6,0	1
08901	4,5	150	6,0	1
08902	5,0	150	6,0	1
08903	5,5	150	6,0	1
08904	6,0	150	6,0	1
08905	7,0	150	6,0	1
08906	8,0	150	6,0	1
08907	9,0	150	6,0	1
08908	10,0	150	6,0	1
08909	11,0	150	6,0	1
08911	13,0	150	6,0	1

Bit holder SYSTEM 6 clamping with ball

7802

Order-No.		mm			
03882	1/4	150	6,0	10	5

Interchangeable blade SYSTEM 6

1/4" square adapter for nut driver inserts

7803

Order-No.		mm		
03883	1/4	150	6,0	5

Which drives are used for each individual product? Page 338

Screwdriver with interchangeable blade set SYSTEM 4

Mixed 11-pcs. in roll-up bag

269T

Ordern-No.	
00610	5
	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
	1,5 - 3,0 / 2,0 - 3,5 / 2,5 - 4,0
	PH000 - PH00 / PH0 - PH1
	1,3 - 1,3 / 1,5 - 1,5 / 2 - 2 / 2,5 - 2,5 / 3 - 3

• With ball end

Mixed 11-pcs. in roll-up bag

269T

Ordern-No.	
27820	1
	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
	1,5 - 3,0 / 2,0 - 3,5 / 2,5 - 4,0
	PH000 - PH00 / PH0 - PH1
	T6 - T8 / T7 - T9
	1,5 - 1,5 / 2 - 2 / 2,5 - 2,5

Screwdriver with interchangeable blade set SYSTEM 4

Slotted, Phillips, 4-pcs. in roll-up bag

269T

Ordern-No.	
00613	5
	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
	2,0 - PH00 / 3,0 - PH0 / 4,0 - PH1

Slotted, Phillips, 6-pcs. in roll-up bag

269T

Ordern-No.	
00616	5
	Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
	1,5 - 3,0 / 2,0 - 3,5 / 2,5 - 4,0
	PH000 - PH00 / PH0 - PH1

INFOBOX:
SYSTEM 4

Screwdriver with interchangeable blades

- Flexible, versatile precision interchangeable blade system for delicate fastening tasks.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Press and hold sleeve: Desired blade length can be set (18 – 90 mm)
- Release sleeve: Blade is held in place

Bit set SYSTEM 4 ESD

Mixed 26-pcs. in box

269ESD

Order-No.	
33848	1
	1 x Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade
	1 x Bit holder SYSTEM 4 clamping with ball
	1 x 1,5 / 1 x 2,0 / 1 x 3,0 / 1 x 4,0
	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10
	1 x 0,7 / 1 x 0,9 / 1 x 1,3 / 1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 1 x 3,0 / 1 x 4,0

DIN 3126, ISO 1173, style C 4. IEC 61340-5-1.

Bit set SYSTEM 4 ESD

Mixed 16-pcs. in box

269ESD

Order-No.	
33503	1
	1 x Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade
	1 x Bit holder SYSTEM 4 clamping with ball
	1 x 2,0 / 1 x 3,0
	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T8
	1 x 0,9 / 1 x 1,3 / 1 x 1,5

DIN 3126, ISO 1173, style C 4. IEC 61340-5-1.

Which drives are used for each individual product? Page 338

Screwdriver with interchangeable blade set SYSTEM 4 ESD

Mixed 11-pcs. in roll-up bag

269TESD

Order-No.		
31499		5
	Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade	
	1,5 - 3,0 / 2,0 - 3,5 / 2,5 - 4,0	
	PH000 - PH00 / PH0 - PH1	
	T6 - T8 / T7 - T9	
	1,5 - 1,5 / 2 - 2 / 2,5 - 2,5	

Screwdriver handle SoftFinish®-telescopic

for SYSTEM 4 interchangeable blade

269

Order-No.				
30373	4,0	105	23	10

Screwdriver handle SoftFinish®-telescopic ESD

for SYSTEM 4 interchangeable blade

2691ESD

Order-No.				
31498	4,0	105	23	10

IEC 61340-5-1.

Interchangeable blade SYSTEM 4

Slotted

26900

Order-No.					mm		
00576	1,5	3,0	0,25	0,5	120	4,0	5
00577	2,0	3,5	0,4	0,6	120	4,0	5
00578	2,5	4,0	0,4	0,8	120	4,0	5

Slotted/ Phillips

26901

Order-No.				mm		
00601	2,0	PH00	0,4	120	4,0	5
00602	3,0	PH0	0,5	120	4,0	5
00603	4,0	PH1	0,8	120	4,0	5

Phillips

26911

Order-No.			mm		
00579	PH000	PH00	120	4,0	5
00580	PH0	PH1	120	4,0	5

Pozidriv

26922

Order-No.			mm		
03186	PZ0	PZ1	120	4,0	5

TORX®

26955

Order-No.			mm		
26122	T1	T2	120	4,0	5
26123	T3	T4	120	4,0	5
26124	T5	T6	120	4,0	5
00597	T6	T8	120	4,0	5
00598	T7	T9	120	4,0	5
00599	T10	T15	120	4,0	5
00600	T15	T20	120	4,0	5

Ball end hex

26937

Order-No.			mm		
00582	1,3•	1,3	120	4,0	5
00583	1,5•	1,5	120	4,0	5
00584	2•	2	120	4,0	5
00585	2,5•	2,5	120	4,0	5
00586	3•	3	120	4,0	5
00587	4•	4	120	4,0	5

• With ball end

L-keys
Difficult to access - easily solved.

Wiha L-keys are essential for all users who are faced with a screw fastening task in difficult work conditions. For difficult-to-access screws Wiha L-keys with a shortened L-key arm prove themselves to be ideal. The risk of injury is significantly reduced as the hand-working space is increased by over 30%.

Wiha ball-end tools enable fastening at angles of up to 25° per side. The risk of an accident is reduced since the tool does not slip out of the screw. Screws made of steel and non-magnetic materials are securely held in any position with the Wiha MagicRing and MagicSpring.

L-key holders

L-key set in ErgoStar holder hexagonal ball Magicring® 9-pcs. in flourescent colour
Page 230



L-key set in ErgoStar holder Hexagonal ball end MagicRing® matt chrome-plated 9-pcs.
Page 231

L-key set in ProStar holder Matt chrome-plated hexagonal ball end with short shaft, 9-pcs.
Page 232

L-key set in ProStar holder Hexagonal ball end matt chrome-plated 9-pcs.
Page 232

L-key set in Compact holder Hexagonal ball end, 9-pcs., short, matt chrome-plated
Page 233

L-key set in ErgoStar holder TORX® MagicSpring®, 13-pcs., black oxidised
Page 235

L-key set in ProStar holder Stubby TORX® ball end, 13-pcs. in titanium silver
Page 237

L-key set in ProStar holder TORX®, 13-pcs., black oxidised
Page 237

L-key set in Classic holder TORX®, 8-pcs., short, black oxidised
Page 238

L-key with T-handle ComfortGrip Hexagon MagicRing® with side drive, matt chrome-plated
Page 247

L-key with key handle TORX®, black oxidised
Page 251

L-key with flag handle TORX®, black oxidised
Page 252

L-key set in ErgoStar holder

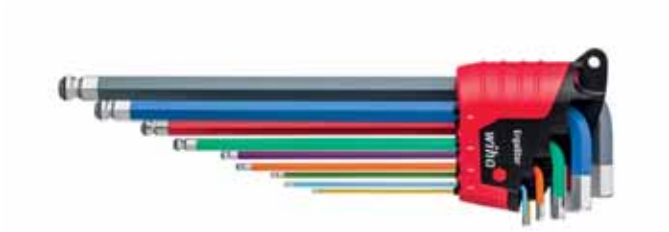

hexagonal ball Magicring® 9-pcs. in flourescent colour — 369RF

Order-No.	SB	
41979		5
43851	x	5

1,5 / 2 / 2,5

3 / 4 / 5 / 6 / 8 / 10

MagicRing® from size 3 mm.
Based on ISO 2936L.

L-key set in ErgoStar holder

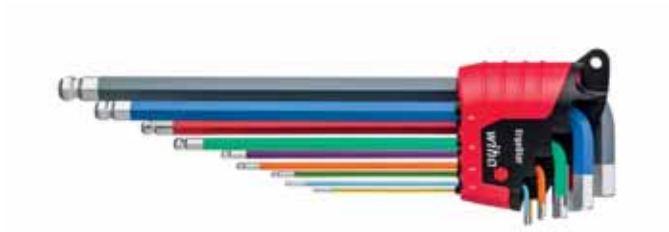

hexagonal ball end, 9-pcs. in fluorescent colour — 369F

Order-No.	SB	
41483		5
43849	x	5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

INFOBOX: Tools in fluorescent colour

- Coloured bits and ErgoStar with coloured L-keys light up under a UV light.
- Ensuring misplaced tools are quickly and easily found again.
- The Wiha flashlight with a UV light makes the perfect complement to coloured fluorescent tools.

INFOBOX: ErgoStar

The right L-key after just one turn.

- One turn of any L-key and all L-keys are ready for removal.
- Solid stopping point for fixing L-keys in the holder.
- Innovative clamping ensures L-keys are held firmly in both a closed and open position.
- Compact design saves space on the work bench or in the toolbox.

Which drives are used for each individual product? Page 338

L-key set in ErgoStar holder

Hexagonal ball end MagicRing® matt chrome-plated 9-pcs. **369R**

Order-No.	SB	
37351		5
43850	x	5
	1,5 / 2 / 2,5	
	3 / 4 / 5 / 6 / 8 / 10	

MagicRing® from size 3 mm.
Based on ISO 2936L.

L-key set in ErgoStar holder

Hexagonal ball end MagicRing® matt chrome-plated, inch design 13-pcs. **369RZ**

Order-No.	SB	
36521		5
43852	x	5
	0.05 / 1/16 / 5/64 / 3/32 / 7/64	
	1/8 / 9/64 / 5/32 / 3/16 / 7/32 / 1/4 / 5/16 / 3/8	

MagicRing® from 1/8"
Based on ASME B18.3.

1

INFOBOX:
MagicRing®

Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

INFOBOX:
Ball end hex

Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

L-key set in ProStar holder

Matt chrome-plated hexagonal ball end with short shaft, 9-pcs.

369T

Order-No.	SB	
35480		5
35481	x	5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Based on ISO 2936L.

L-key set in ProStar holder

Hexagonal ball end in inch design, 13-pcs., black oxidised

369ZB

Order-No.	SB	
24189		5
24851	x	5

0.05 / 1/16 / 5/64 / 3/32 / 7/64 / 1/8 / 9/64 / 5/32 / 3/16 / 7/32 / 1/4 / 5/16 / 3/8

Based on ASME B18.3.

L-key set in ProStar holder

Hexagonal ball end matt chrome-plated 9-pcs.

369

Order-No.	SB	
07185		5
07192	x	5

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Based on ISO 2936L.

INFOBOX:

L-key with short shaft

Especially for hard-to-reach screws and confined spaces

- Improved accessibility thanks to a 60% reduction in length of the short L-key side.
- Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key.
- Ball end geometry enables fastening at an angle of up to 25°.

Which drives are used for each individual product? Page 338

L-key set in Compact holder

Hexagonal ball end matt chrome-plated 11-pcs.

369

Order-No.	SB	
36453		5
36454	x	5
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10		

Including 7 mm and 9 mm special sizes.
Based on ISO 2936L.

L-key set in Compact holder

Hexagonal ball end, 9-pcs., short, matt chrome-plated

369K

Order-No.	SB	
40410		10
40411	x	5
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10		

Based on ISO 2936L.

L-key set in Compact holder

Hexagonal ball end matt chrome-plated 9-pcs.

369

Order-No.	SB	
01418		5
02292	x	5
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10		

Based on ISO 2936L.

L-key set in Classic holder

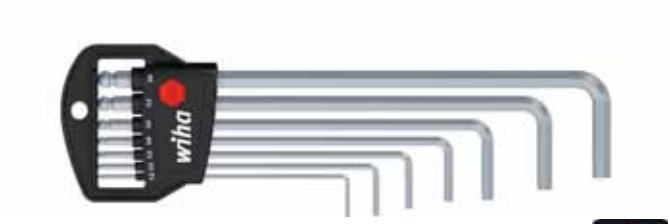

Hexagonal ball end matt chrome-plated 7-pcs.

369

Order-No.	SB	
01416		5
03723	x	10
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6		

Based on ISO 2936L.

L-key set in Classic holder

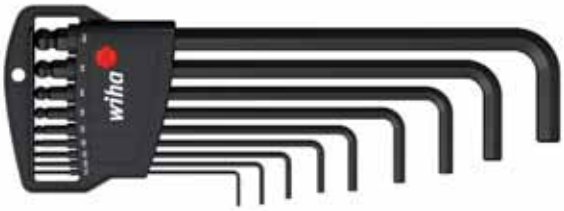

Hexagonal ball end, 9-pcs., black oxidised 369B

Order-No.	SB	
03879		5
03992	x	10
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10		

Based on ISO 2936L.

L-key set in Classic holder

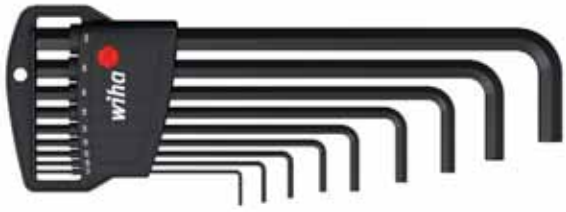

Hex, 9-pcs., black oxidised 352B

Order-No.	SB	
06386	x	5
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10		

Based on ISO 2936L.

L-key set in Classic holder

Hexagonal ball end, 8-pcs. in inch design, black oxidised 369ZB

Order-No.	SB	
01420		5
02939	x	10
5/64 / 3/32 / 1/8 / 5/32 / 3/16 / 7/32 / 1/4 / 5/16		

Based on ASME B18.3.

L-key set in Classic holder

Hex, 9-pcs., black oxidised 350

Order-No.	SB	
06379	x	10
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10		

ISO 2936K.

L-key set in Classic holder

Hex, 7-pcs., black oxidised 350

Order-No.	SB	
06378	x	10
1,5 / 2 / 2,5 / 3 / 4 / 5 / 6		

ISO 2936K.

Which drives are used for each individual product? Page 338

L-key set in Classic holder

Hex, 5-pcs., black oxidised 352B

Order-No.	SB	
06382	x	10
0,7 / 0,9 / 1,3 / 1,5 / 2		

Based on ISO 2936L.

L-key set in Classic holder

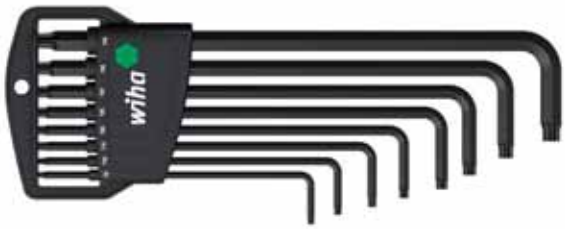

TORX® MagicSpring®, 8-pcs., black oxidised 366R

Order-No.	SB	
34740		5
34741	x	10
T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40		

L-key set in ErgoStar holder

TORX® MagicSpring®, 13-pcs., black oxidised 366R

Order-No.	SB	
36503		5
43848	x	5
T5		
T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45		

MagicSpring® from size T6

L-key set in Classic holder

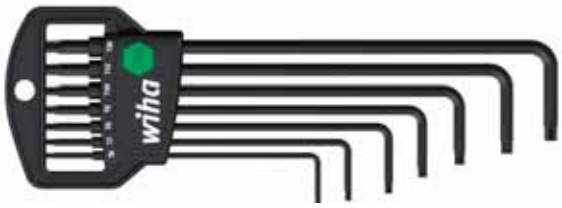

TORX® MagicSpring®, 7-pcs., black oxidised 366R

Order-No.	SB	
33753		5
33754	x	5
T6 / T7 / T8 / T9 / T10 / T15 / T20		

INFOBOX:
MagicSpring®

Wiha TORX® MagicSpring®

- TORX® and TORX PLUS® screws are held securely in place.
- An innovation, which will benefit each user.

L-key set in ErgoStar holder

TORX® ball end, 13-pcs., black oxidised **366BE**

Order-No.	SB	
36487		5
43847	x	5

T5 / T6 / T7 / T8

T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45

TORX® ball end from size T9

L-key set in Classic holder

TORX® ball end, 8-pcs., black oxidised **366BE**

Order-No.	SB	
32394		5
32395	x	10

T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40

L-key set in ProStar holder

Stubby TORX® ball end, 13-pcs. in titanium silver **366BET**

Order-No.	SB	
40979		5
40980	x	1

T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45

TORX® ball end from size T9

INFOBOX:
TORX® ball end



Wiha TORX® ball end

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.

Which drives are used for each individual product? Page 338

L-key set in ProStar holder

TORX® titanium silver 13-pcs. **366TS**

Order-No.	SB	
39104		5
39105	x	5

T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45

L-key set in ProStar holder

TORX®, 13-pcs., black oxidised **366**

Order-No.	SB	
24312		5
24852	x	5

T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T50

L-key set in Classic holder

TORX®, 8-pcs., black oxidised 366

Order-No.	SB	
34736		5
34737	x	10

T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40

L-key set in Classic holder

TORX PLUS®, 8-pcs. in black oxidised 361IP

Order-No.	SB	
36459	x	5

9IP / 10IP / 15IP / 20IP / 25IP / 27IP / 30IP / 40IP

TORX PLUS® keys cannot be used with TORX® screws.

L-key set in Classic holder

TORX®, 8-pcs., short, black oxidised 363

Order-No.	SB	
36461	x	5

T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40

L-key set in Classic holder

TORX® Tamper Resistant (with hole), 8-pcs., black oxidised 363TR

Order-No.	SB	
36462		5
36458	x	10

T9H / T10H / T15H / T20H / T25H / T27H / T30H / T40H

L-key set

Short TORX® in work bench stand, 9-pcs., black oxidised 363

Order-No.	SB	
01326	x	1

T10 / T15 / T20 / T25 / T30 / T40 / T50 / T55 / T60

Which drives are used for each individual product? Page 338

L-key with T-handle set ComfortGrip

Hexagon with side drive, matt chrome-plated 6-pcs. **334DS**

Order-No.	SB	
26247	x	1

2,5 / 3 / 4 / 5 / 6 / 8

L-key with T-handle set ComfortGrip

TORX® with side drive, matt chrome-plated 6-pcs. **364DS**

Order-No.	SB	
26248	x	1

T10 / T15 / T20 / T25 / T30 / T40

L-key with T-handle set

Hexagon MagicRing® brilliant nickel-plated in work bench stand 6-pcs. **334R**

Order-No.	SB	
22096	x	1

3 / 4 / 5 / 6 / 8 / 10

L-key with T-handle set

Hex in work bench stand, 7-pcs., brilliant nickel-plated **334**

Order-No.	SB	
00953	x	1

2 / 2,5 / 3 / 4 / 5 / 6 / 8

L-key with T-handle set

Short TORX® in work bench stand, 7-pcs., matt chrome-plated 364

Order-No.	SB	
01348	x	1
T10 / T15 / T20 / T25 / T30 / T40 / T50		

L-key with key handle set

TORX PLUS® in work bench stand, 7-pcs., black oxidised 365IP

Order-No.		
26261	x	1
6IP x 35 / 7IP x 35 / 8IP x 40 / 9IP x 40 / 10IP x 40 / 15IP x 45 / 20IP x 45		

L-key with key handle set

TORX® in work bench stand, 7 pcs., black oxidised 365

Order-No.		
25624	x	1
T6 x 35 / T7 x 35 / T8 x 40 / T9 x 40 / T10 x 40 / T15 x 45 / T20 x 45		

L-key with flag handle set

TORX® in work bench stand, 7 pcs., black oxidised 370

Order-No.		
25625	x	1
T6 x 35 / T7 x 35 / T8 x 40 / T9 x 40 / T10 x 40 / T15 x 45 / T20 x 45		

Which drives are used for each individual product? Page 338

L-keys

hexagonal ball MagicRing® in fluorescent colour

369RF

Order-No.	◉	↔	↕		
41973	3	128	23	orange	10
41974	4	142	29	purple	10
41975	5	163	33	Dark green	10
41976	6	184	38	red	10
41977	8	206	44	Dark blue	10
41978	10	231	50	Anthracite	10

Based on ISO 2936L.

L-keys

hexagonal ball in flourescent colour

369F

Order-No.	◉	↔	↕		
41894	1,5	91	15	yellow	10
41895	2	101	18	light blue	10
41896	2,5	113	20	Light green	10
41897	3	128	23	orange	10
41898	4	142	29	purple	10
41899	5	163	33	Dark green	10
41900	6	184	38	red	10
41901	8	206	44	Dark blue	10
41902	10	231	50	Anthracite	5

L-keys

Hexagonal ball end MagicRing® matt chrome-plated

369R

Order-No.	◉	↔	↕	
20549	3	128	23	10
20550	4	142	29	10
20570	5	163	33	10
20551	6	184	38	10
20552	8	206	44	10
20553	10	231	50	5

Based on ISO 2936L.

L-keys

Hexagonal ball end MagicRing®, inch design matt chrome-plated

369RZ

Order-No.	◉	↔	↕	mm	
24302	1/8	121	23	3,17	10
24304	9/64	136	27	3,57	10
24303	5/32	148	29	3,96	10
24305	3/16	163	33	4,76	10
24306	7/32	176	36	5,55	10
24307	1/4	191	38	6,35	10
24308	5/16	210	43	7,93	10
24341	3/8	232	49	9,52	10

Based on ASME B18.3.

L-keys

Hexagonal ball end with short side, matt chrome-plated

369T

Order-No.	◉	⟷	↕	
35482	1,5	91	5,5	10
35483	2	101	9	10
35484	2,5	113	9,5	10
35485	3	128	11	10
35486	4	142	13	10
35487	5	163	15	10
35488	6	184	18	10
35489	8	206	22	10
35490	10	231	28	5

Based on ISO 2936L.

L-keys

Hexagonal ball end, short, matt chrome-plated

369K

Order-No.	◉	⟷	↕	
40401	1,5	46	15	10
40402	2	51	18	10
40403	2,5	57	20	10
40404	3	64	23	10
40405	4	72	29	10
40406	5	83	33	10
40407	6	94	38	10
40408	8	105	44	10
40409	10	119	50	10

As per ISO 2936K.

L-keys

Hexagonal ball end matt chrome-plated

369

Order-No.	◉	⟷	↕	
01392	1,5	91	15	10
01393	2	101	18	10
01395	2,5	113	20	10
01396	3	128	23	10
01398	4	142	29	10
01400	5	163	33	10
01402	6	184	38	10
07922	7	195	39	5
01404	8	206	44	10
36452	9	217	47	5
01406	10	231	50	5
01408	12	259	57	5

Based on ISO 2936L.

L-keys

Matt chrome-plated hexagonal ball end in inch design

369Z

Order-No.	◉	⟷	↕	mm	
29471	0.05	72	13	1,27	10
29472	1/16	80	15	1,59	10
29474	5/64	88	18	1,98	10
29473	3/32	101	20	2,38	10
29475	7/64	111	21	2,78	10

Based on ASME B18.3.

Which drives are used for each individual product? Page 338

L-keys

hexagonal ball end, black oxidised

369B

Order-No.	◉	⟷	↕	
01391	1,3	74	14	10
05638	1,5	91	15	10
03868	2	101	18	10
03869	2,5	113	20	10
03870	3	128	23	10
03871	4	142	29	10
03872	5	163	33	10
03873	6	184	38	10
03874	8	206	44	10
03875	10	231	50	10
03876	12	259	57	10

Based on ISO 2936L.

L-keys

Hexagonal ball end in inch design, black oxidised

369 Zoll B

Order-No.	◉	⟷	↕	mm	
01422	0.05	72	13	1,27	10
01423	1/16	80	15	1,59	10
01431	5/64	88	18	1,98	10
01427	3/32	101	20	2,38	10
01433	7/64	111	21	2,78	10
01425	1/8	121	23	3,18	10
01434	9/64	136	27	3,57	10
01430	5/32	148	29	3,97	10
01426	3/16	163	33	4,76	10
01432	7/32	176	36	5,56	10
01424	1/4	191	38	6,35	10
01429	5/16	210	43	7,94	10
01428	3/8	232	49	9,53	5

Based on ASME B18.3.

L-keys

Hex , black oxidised

352B

Order-No.	◉	⟷	↕	
06358	0,7	67	6	5
06359	0,9	70	9	5
06360	1,3	73	13	5
06059	1,5	91	15	10
06361	2	101	18	10
06362	2,5	113	20	10
06363	3	128	23	10
06364	4	142	29	10
06365	5	163	33	10
06366	6	184	38	10
06367	7	194	41	10
06368	8	206	44	10
06369	10	231	50	5
06370	12	259	57	5
06371	14	294	70	5

Based on ISO 2936L.

L-keys

Hex, short, black oxidised

350

Order-No.				
06218	1,3	41	13	10
01121	1,5	46	15	10
01122	2	51	18	10
01123	2,5	57	20	10
01124	3	64	23	10
01126	4	72	29	10
01128	5	83	33	10
01130	6	94	38	10
01131	7	99	41	10
01132	8	105	44	10
01133	9	112	47	5
01134	10	119	50	5
01135	11	126	53	5
01136	12	134	57	5
01137	14	151	70	5
01138	17	173	80	5
01139	19	195	89	5
01140	22	217	102	1
01141	24	241	114	1
01142	27	271	127	1
01143	32	339	157	1

ISO 2936K.

L-keys

TORX® MagicSpring®, black oxidised

366R

Order-No.					
31233	T6	80	15	1/16	10
31234	T7	88	18	5/64	10
31235	T8	101	20	3/32	10
31236	T9	111	21	7/64	10
31237	T10	121	23	1/8	10
31238	T15	136	27	9/64	10
31239	T20	148	29	5/32	10
31240	T25	163	33	3/16	10
31241	T27	176	36	7/32	10
31242	T30	191	38	1/4	10
31243	T40	210	43	5/16	10
31244	T45	232	49	3/8	10

L-keys

TORX® ball end, black oxidised

366BE

Order-No.					
32386	T9	111	21	7/64	10
32387	T10	121	23	1/8	10
32388	T15	136	27	9/64	10
32389	T20	148	29	5/32	10
32390	T25	163	33	3/16	10
32391	T27	176	36	7/32	10
32392	T30	191	38	1/4	10
32393	T40	210	43	5/16	10
33749	T45	232	49	3/8	10
33750	T50	232	49	3/8	10

Which drives are used for each individual product? Page 338

TORX® ball end with short handle, titanium silver

366BET

Order-No.					
40966	T5	72	6,5	0,05	10
40967	T6	80	6,9	1/16	10
40968	T7	89	8,9	5/64	10
40969	T8	101	10,4	3/32	10
40970	T9	111	11,8	7/64	10
40971	T10	122	12,0	1/8	10
40972	T15	136	12,5	9/64	10
40973	T20	149	13,3	5/32	10
40974	T25	164,5	16,2	3/16	10
40975	T27	176	18,0	7/32	10
40976	T30	191	19,2	1/4	10
40977	T40	210	24,1	5/16	10
40978	T45	232	29,5	3/8	10

TORX® ball end from size T9

L-keys

TORX® titanium silver

366 TS

Order-No.					
39106	T5	72	13	0,05	10
39107	T6	80	15	1/16	10
39108	T7	88	18	5/64	10
39109	T8	101	20	3/32	10
39110	T9	111	21	7/64	10
39111	T10	121	23	1/8	10
39112	T15	136	27	9/64	10
39113	T20	148	29	5/32	10
39114	T25	163	33	3/16	10
39115	T27	176	36	7/32	10
39116	T30	191	38	1/4	10
39117	T40	210	43	5/16	10
39118	T45	232	49	3/8	10

L-keys

TORX®, black oxidised

366

Order-No.					
24313	T5	72	13	0,05	10
24314	T6	80	15	1/16	10
24315	T7	88	18	5/64	10
24316	T8	101	20	3/32	10
24317	T9	111	21	7/64	10
24318	T10	121	23	1/8	10
24319	T15	136	27	9/64	10
24320	T20	148	29	5/32	10
24321	T25	163	33	3/16	10
24322	T27	176	36	7/32	10
24323	T30	191	38	1/4	10
24324	T40	210	43	5/16	10
24325	T50	232	49	3/8	10

L-keys

TORX PLUS®, short, black oxidised

361IP

Order-No.					
24515	7IP	44	18	2,5	10
24517	8IP	47	18	2,5	10
24519	9IP	51	19	3,0	10
24521	10IP	54	20	3,0	10
24523	15IP	58	22	3,5	10
24525	20IP	62	23	4,0	10
24527	25IP	67	25	4,5	10
24529	27IP	73	27	5,5	10
24531	30IP	79	30	6,0	10
24533	40IP	88	33	7,0	10

L-keys

TORX®, short, black oxidised

363

Order-No.					
03764	T5	39	18	2,5	10
01310	T6	41	18	2,5	10
01311	T7	44	18	2,5	10
01312	T8	47	18	2,5	10
01313	T9	51	19	3,0	10
01314	T10	54	20	3,0	10
01315	T15	57	22	3,5	10
01316	T20	62	23	4,0	10
01317	T25	67	25	4,5	10
01318	T27	72	27	5,5	10
01319	T30	79	30	6,0	10
01320	T40	86	33	7,0	10
01321	T45	90	36	8,0	10
01322	T50	104	41	9,0	10
01323	T55	120	47	12,0	10
01324	T60	134	52	14,0	10

L-keys

TORX® Tamper Resistant (with hole), short, black oxidised

363TR

Order-No.					
24107	T8H	47	18	2,5	10
24109	T9H	51	19	3,0	10
24111	T10H	54	20	3,0	10
24113	T15H	57	22	3,5	10
24115	T20H	62	23	4,0	10
24117	T25H	67	25	4,5	10
24119	T27H	72	27	5,5	10
24121	T30H	79	30	6,0	10
24123	T40H	86	33	7,0	10

Which drives are used for each individual product? Page 338

L-key with T-handle ComfortGrip

Hexagon MagicRing® with side drive, matt chrome-plated

334DSR

Order-No.	◉					
26135	3	100	13	80	26	10
26136	4	150	13	80	26	10
26137	5	150	17	100	32	10
26138	6	150	17	100	32	10
26139	8	200	17	100	32	10
26140	10	200	22	120	38	5

L-key with T-handle ComfortGrip

Hex with side drive, matt chrome-plated

334DS

Order-No.	◉					
26164	2	100	13	80	26	10
26165	2,5	100	13	80	26	10
26166	3	100	13	80	26	10
26167	4	150	13	80	26	10
26168	5	150	17	100	32	10
26169	6	150	17	100	32	10
26170	8	200	17	100	32	10
26171	10	200	22	120	38	5

L-key with T-handle ComfortGrip

Hexagonal ball end with side drive, matt chrome-plated

540DS

Order-No.	◉					
28372	3	150	13	80	26	10
28373	4	150	13	80	26	10
28374	5	150	17	100	32	10
28375	6	150	17	100	32	10
28376	8	200	17	100	32	10
28377	10	200	22	120	38	5

L-key with T-handle ComfortGrip

TORX® with side drive, matt chrome-plated

364DS

Order-No.	✱					
26172	T10	100	13	80	26	10
26173	T15	100	13	80	26	10
26174	T20	100	17	100	32	10
26175	T25	150	17	100	32	10
26176	T27	150	17	100	32	10
26177	T30	150	17	100	32	10
26178	T40	150	17	100	32	10

L-key with T-handle

Hexagon MagicRing® brilliant nickel-plated

334R

Order-No.	◉					
22168	3	100	126	80	26	10
22170	4	150	176	80	26	10
22172	5	150	182	100	32	10
22174	6	150	182	100	32	10
21960	8	200	232	100	32	10
21962	10	200	238	120	38	10

L-key with T-handle

Hexagonal ball end brilliant nickel-plated

540

Order-No.	◉					
04111	4	150	176	80	26	10
04108	5	150	182	100	32	10
04105	6	150	182	100	32	10
04099	8	200	238	100	32	10
04096	10	200	238	120	38	10

L-key with T-handle

Hexagon brilliant nickel-plated

334

Order-No.	◉						
00904	2	100	-	126	80	26	10
00905	2	200	-	226	80	26	10
00906	2,5	100	-	126	80	26	10
00907	2,5	200	-	226	80	26	10
00908	3	100	-	126	80	26	10
00909	3	150	-	176	80	26	10
00910	3	200	-	226	80	26	10
00911	3•	350	5+	382	100	32	10
00912	4	100	-	126	80	26	10
00913	4	150	-	176	80	26	10
00914	4	200	-	226	80	26	10
00915	4•	350	5+	382	100	32	10
00916	5	100	-	132	100	32	10
00917	5	150	-	182	100	32	10
00918	5	200	-	232	100	32	10
00919	5	350	-	382	100	32	10
00921	6	100	-	132	100	32	10
00922	6	150	-	182	100	32	10
00923	6	200	-	232	100	32	10
00924	6	350	-	382	100	32	10
00926	7	200	-	232	100	32	10
00928	8	100	-	132	100	32	10
00929	8	150	-	182	100	32	10
00930	8	200	-	232	100	32	10
00931	8	350	-	382	100	32	10
00933	10	100	-	138	120	38	10
00934	10	200	-	238	120	38	10
00937	12	200	-	238	120	38	5

• Overlength with reinforced blade.

Which drives are used for each individual product? Page 338

Nut driver with T-handle

Hexagon brilliant nickel-plated

336

Order-No.	○					
00965	5,5	125	157	100	32	10
00966	6	125	157	100	32	10
00967	6	200	232	100	32	10
00968	7	125	157	100	32	10
00969	7	200	232	100	32	10
00971	8	125	157	100	32	10
00972	8	200	232	100	32	10
00973	8	350	382	100	32	10
00974	9	125	157	100	32	10
00975	9	200	232	100	32	10
00977	10	125	157	100	32	10
00978	10	200	232	100	32	10
00979	10	230	262	100	32	10
00980	10	350	382	100	32	10
00982	11	125	157	100	32	10
00983	11	230	262	100	32	5
00985	12	125	157	100	32	10
00986	12	230	262	100	32	5
00988	13	125	157	100	32	10
00989	13	230	262	100	32	10
00990	13	350	382	100	32	10
00991	14	125	157	100	32	5
00993	15	125	157	100	32	5
00994	16	125	157	100	32	5
00995	17	125	157	100	32	5

Nut driver with T-handle

Square nickel-plated

338

Order-No.	○					
01005	6	125	157	100	32	10
01006	8	125	157	100	32	10
01007	10	125	157	100	32	10
01008	12	125	157	100	32	10

L-key with T-handle

Hex, inch design brilliant nickel-plated

334Z

Order-No.	◉					mm	
02802	3/32	150	176	80	26	2,38	10
02803	7/64	150	176	80	26	2,78	10
02804	1/8	150	176	80	26	3,18	10
02805	9/64	150	176	80	26	3,57	10
02806	5/32	150	176	80	26	3,97	10
02807	3/16	150	182	100	32	4,76	10
02808	7/32	150	182	100	32	5,56	10
02809	1/4	150	182	100	32	6,35	10
02810	5/16	150	182	100	32	7,94	10
02811	3/8	150	188	120	38	9,53	10

Nut driver with T-handle

Hex, inch design brilliant nickel-plated

336Z

Order-No.						mm	
02819	3/16	150	182	100	32	4,76	10
02820	1/4	150	182	100	32	6,35	10
02821	5/16	150	182	100	32	7,94	10
02822	3/8	150	182	100	32	9,53	10
02823	7/16	150	182	100	32	11,11	10
02824	1/2	150	182	100	32	12,70	10

Nut driver with T-handle electric

1000 V IEC 60900

Hex

336N

Order-No.						
27932	8	200	232	100	32	10
27933	10	230	262	100	32	10
27934	13	230	262	100	32	10
27935	17	230	268	120	38	10

Manufactured acc. to IEC 60900.

L-key with T-handle electric

1000 V IEC 60900

Hex

334N

Order-No.						
27928	4	150	176	80	26	10
27929	5	150	182	100	32	10
27930	6	150	182	100	32	10
27931	8	150	182	100	32	10

Manufactured acc. to IEC 60900.

L-key with T-handle

TORX® matt chrome-plated

364

Order-No.							
01328	T9	100	4,0	126	80	26	10
01329	T10	100	4,0	126	80	26	10
01330	T15	100	4,0	126	80	26	10
01331	T15	200	5,5	226	80	26	10
01332	T20	100	4,0	132	100	32	10
01333	T20	200	5,5	232	100	32	10
01334	T25	100	4,5	132	100	32	10
01335	T25	200	5,5	232	100	32	10
01336	T27	100	5,5	132	100	32	10
01337	T27	200	5,5	232	100	32	5
01338	T30	100	6,0	132	100	32	10
01339	T30	200	6,0	232	100	32	5
01340	T40	100	7,0	132	100	32	10
01341	T40	200	7,0	232	100	32	5
01343	T45	250	8,0	288	120	38	5
01345	T50	250	9,0	288	120	38	5

Which drives are used for each individual product? Page 338

L-key with T-handle

TORX® MagicSpring® matt chrome-plated

364R

Order-No.							
27964	T9	100	4,0	126	80	26	10
27965	T10	100	4,0	126	80	26	10
27966	T15	100	4,0	126	80	26	10
27967	T20	100	4,0	132	100	32	10
27968	T25	100	5,0	132	100	32	10
27969	T27	100	6,0	132	100	32	10
27970	T30	100	6,0	132	100	32	10
27971	T40	100	8,0	132	100	32	10

L-key with T-handle

TORX PLUS® matt chrome-plated

364IP

Order-No.							
26953	9IP	100	4,0	126	80	26	10
26954	10IP	100	4,0	126	80	26	10
26955	15IP	100	4,0	126	80	26	10
26956	20IP	100	4,0	132	100	32	10
26957	25IP	150	4,5	182	100	32	10
26958	27IP	150	5,5	182	100	32	10
26959	30IP	150	6,0	182	100	32	10
26960	40IP	150	7,0	182	100	32	10

L-key with key handle

Hex , black oxidised

331

Order-No.					
00894	1,5	60	95	40	10
00895	2	60	95	40	10
00896	2,5	60	95	40	10
00897	3	60	95	40	10

L-key with key handle

TORX®, black oxidised

365

Order-No.						
04918	T5	35	2,0	70	40	10
01350	T6	35	2,0	70	40	10
01351	T7	35	2,5	70	40	10
01352	T8	40	2,5	75	40	10
01353	T9	40	3,0	75	40	10
01354	T10	40	3,0	75	40	10
01355	T15	45	3,5	80	40	10
01356	T20	45	4,0	80	40	10

L-key with key handle

TORX PLUS®, black oxidised 365IP

Order-No.						
26181	5IP	35	2,0	70	40	10
26182	6IP	35	2,0	70	40	10
26183	7IP	35	2,5	70	40	10
26184	8IP	40	2,5	75	40	10
26185	9IP	40	3,0	75	40	10
26186	10IP	40	3,0	75	40	10
26187	15IP	45	3,5	80	40	10
26188	20IP	45	4,0	80	40	10

L-key with flag handle

TORX®, black oxidised 370

Order-No.						
03724	T5	35	2,0	62	15	10
03725	T6	35	2,0	62	15	10
03726	T7	35	2,5	67	19	10
03727	T8	40	2,5	72	19	10
03728	T9	40	3,0	74	24	10
03729	T10	40	3,0	74	24	10
03730	T15	45	3,5	80	28	10
03731	T20	45	4,0	80	28	10

L-key with flag handle

TORX PLUS®, black oxidised 370IP

Order-No.						
27614	5IP	35	2,0	67	15	10
27615	6IP	35	2,0	67	15	10
27616	7IP	35	2,5	67	19	10
27617	8IP	40	2,5	72	19	10
27618	9IP	40	3,0	74	24	10
27619	10IP	40	3,0	74	24	10
27620	15IP	45	3,5	80	28	10
27621	20IP	45	4,0	80	28	10

Which drives are used for each individual product? Page 338

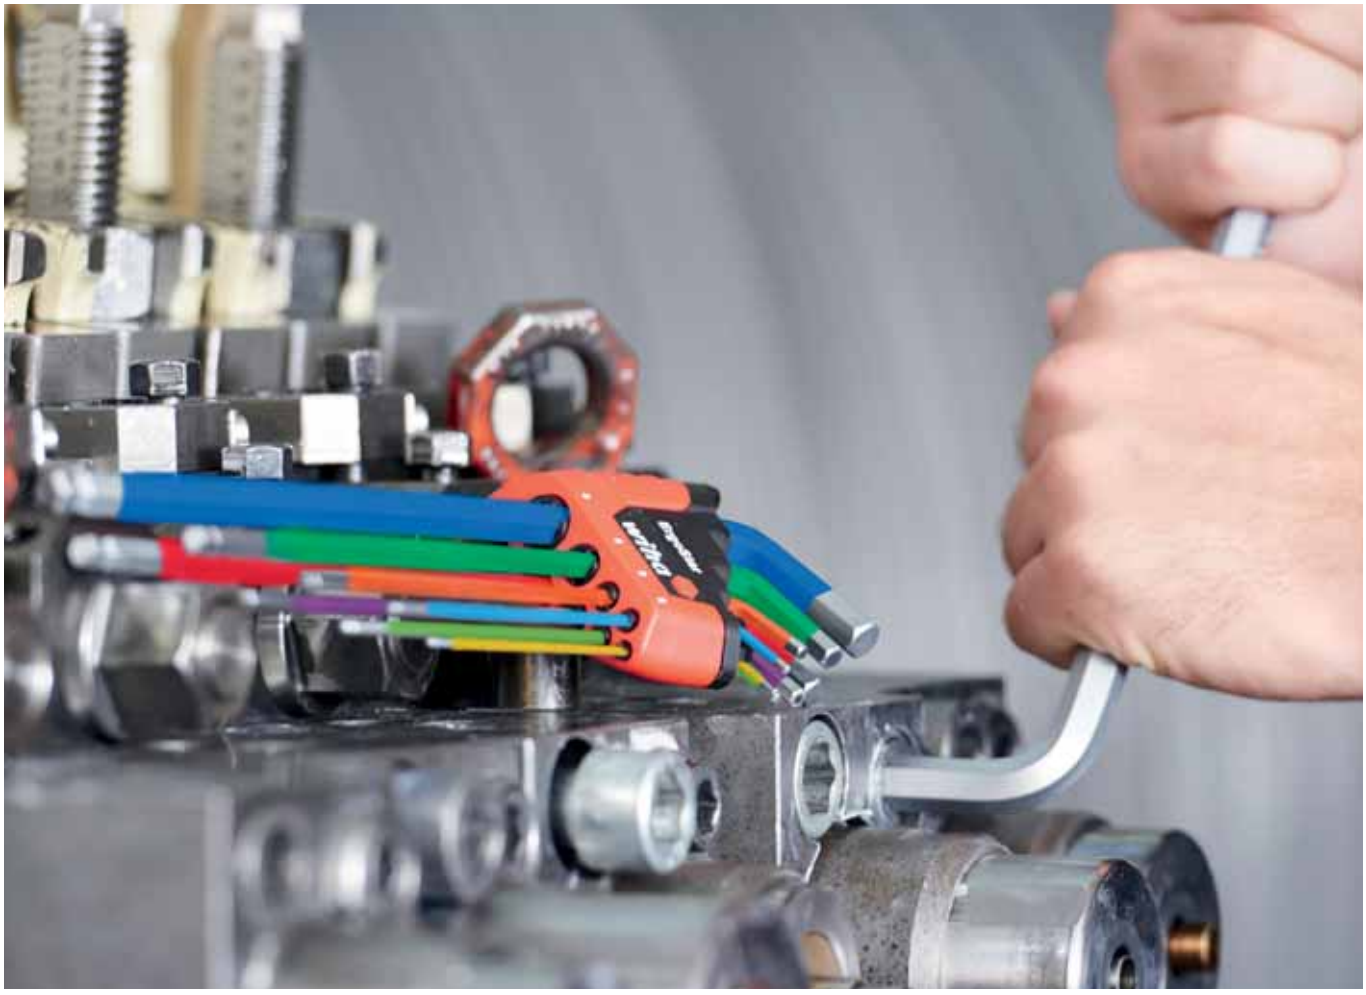

Bits

The indispensable three.

Which machine? Which application? Which bit? The revolutionary Wiha bit concept puts an end to any confusion and presents three bit types which can cover all areas of use.

Only the screw shape is crucial for selecting the bit. The Y bit is ideal for fastening Y-shaped screws with an angle no greater than 90° between the thread and screw head. The T bit is used for T-shaped screws at a 90° angle. If you need to fasten both screw types, then the TY bit is the right choice since this universal bit is suitable for all type of fastenings.

A selection of different bit holders and bit boxes such as the BitBuddy® and XLSelector ensures optimum usage of bits.

Application	Bits			
For all screw types	**BitBuddy® TY bit set, 49 mm** Page 256 	**BitBuddy® TY bit set, 29 mm** Page 257 	**TY bit set 49 mm** Page 256 	**TY bit set 29 mm** Page 258
For T-shaped screws	**XLSelector T bit set, 50 mm** Page 258 	**FlipSelector T bit set, 25 mm** Page 259 	**T bit set, 50 mm** Page 259 	**T bit set, 25 mm** Page 260
For Y-shaped screws	**XLSelector Y bit set, 50 mm** Page 260 	**FlipSelector Y bit set, 25 mm** Page 261 	**Y bit set, 50 mm** Page 261 	**Y bit set, 25 mm** Page 261
For universal applications	**Bit set XLSelector Standard 25 mm** Page 262 	**Bit set FlipSelector Standard 25 mm** Page 262 	**Bit Standard 25 mm 1/4"** Page 265 	**Bit Professional 1/4"** Page 270
MicroBits	**Micro-bit set ESD Mixed 65-pcs. in box** Page 274 	**Micro-bit 28 mm** Page 275 		
Bit holder	**Bit holder CentroFix Force mechanically lockable 1/4", magnetic** Page 280 	**Bit holder CentroFix Super Slim mechanically lockable 1/4", magnetic** Page 280 	**Bit holder MagicFlip Force magnetic with ring magnet, 1/4"** Page 280 	**Screwdriver with SoftFinish® CentroFix bit holder, mechanically lockable 1/4"** Page 282
Special solutions	**Combination drill bit set** Page 277 	**Countersink bit 1/4"** Page 277 	**High-performance offset screwdriver with quick release holder 1/4"1/4"** Page 283 	

BitBuddy® TY bit set, 49 mm

product design award 2013

reddot design award winner 2013

Pozidriv 1/4" 7-pcs.

SB 7946-TY202

Order-No.	
42099	6
	1 x PZ1 / 5 x PZ2 / 1 x PZ3

•compared to Wiha standard bit

TORX® 1/4" 7-pcs.

SB 7946-TY505

Order-No.	
42115	6
	1 x T10 / 1 x T15 / 2 x T20 / 1 x T25 / 1 x T30 / 1 x T40

•compared to Wiha standard bit

Hexagon 1/4" 7-pcs.

SB 7946-TY303

Order-No.	
42114	6
	2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x SW6

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 7-pcs., 1/4"

SB 7946-TY903

Order-No.	
42116	6
	1 x PH2
	1 x PZ1 / 1 x PZ2 / 1 x PZ3
	1 x T15 / 1 x T20 / 1 x T25

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 7-pcs., 1/4"

SB 7946-TY904

Order-No.	
42117	6
	1 x PH2
	1 x PZ1 / 1 x PZ2
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25

•compared to Wiha standard bit

Pozidriv, TORX® 7-pcs. 1/4" in box

SB 7946-TY905

Order-No.	
42118	6
	1 x PZ2 / 1 x PZ3
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40

•compared to Wiha standard bit

TY bit set 49 mm

Order-No.		
42097	5 x PH1	6
42119	5 x PH2	6
42120	5 x PH3	6
42121	5 x PZ1	6
42122	5 x PZ2	6
42123	5 x PZ3	6
42124	5 x SW3	6
42125	5 x SW4	6
42126	5 x SW5	6
42127	5 x SW6	6
42128	5 x T10	6
42129	5 x T15	6
42130	5 x T20	6
42131	5 x T25	6
42132	5 x T27	6
42133	5 x T30	6
42134	5 x T40	6

INFOBOX:
BitBuddy 29

Easy, single-hand operation.

Attaching:

- Bits are directly picked up with the machine from the BitBuddy.

Work:

- Gets your fastenings done.

Storing

- Bits are easily returned to the BitBuddy, by pressing on the red bit strip.
- With magnetic bit holder for a rapid bit change.
- BitBuddy is always at hand - easily fits into trouser pockets or onto the belt clip.

Which drives are used for each individual product? Page 338

BitBuddy® TY bit set, 29 mm

product design award 2013

reddot design award winner 2013

Pozidriv 1/4" 8-pcs.

SB 7945-TY202

Order-No.	
42098	6
	1 x PZ1 / 5 x PZ2 / 1 x PZ3
	1 x Bit holder magnetic extra strong magnet 1/4"

•compared to Wiha standard bit

TORX® 1/4" 8-pcs.

SB 7945-TY505

Order-No.	
42136	6
	1 x T10 / 1 x T15 / 2 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic extra strong magnet 1/4"

•compared to Wiha standard bit

Hexagon 8-pcs. 1/4"

SB 7945-TY303

Order-No.	
42135	6
	2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x SW6
	1 x Bit holder magnetic extra strong magnet 1/4"

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 8-pcs., 1/4"

SB 7945-TY903

Order-No.	
42137	6
	1 x PH2
	1 x PZ1 / 1 x PZ2 / 1 x PZ3
	1 x T15 / 1 x T20 / 1 x T25
	1 x Bit holder magnetic extra strong magnet 1/4"

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 8-pcs., 1/4"

SB 7945-TY904

Order-No.	
42138	6
	1 x PH2
	1 x PZ1 / 1 x PZ2
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25
	1 x Bit holder magnetic extra strong magnet 1/4"

•compared to Wiha standard bit

Pozidriv, TORX® 1/4" 8-pcs.

SB 7945-TY905

Order-No.	
42139	6
	1 x PZ2 / 1 x PZ3
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic extra strong magnet 1/4"

•compared to Wiha standard bit

INFOBOX:
Wiha TY bit concept

- Bits quickly and easily selected thanks to the screw head shape.
- The T bit is ideal for fastening T-shaped screws with an angle of 90°.
- The Y bit is ideal for fastening Y-shaped screws with an angle not equal to 90°.
- Universal in its use, the TY bit is suitable for all types of screws, no matter whether they feature a Y-shaped or T-shaped screw head.

Bitfinder

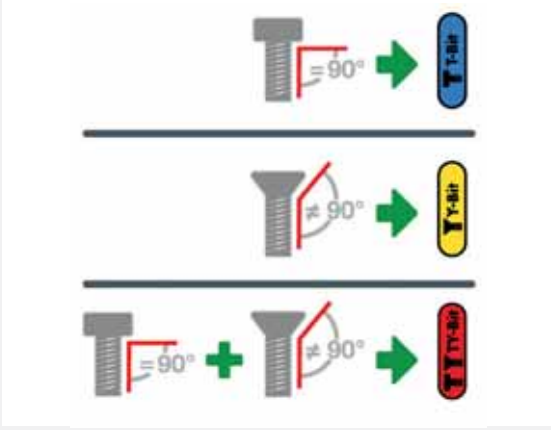

TY bit set 29 mm

Order-No.		
42096	5 x PH1	6
42100	5 x PH2	6
42101	5 x PH3	6
42149	5 x PZ1	6
42102	5 x PZ2	6
42103	5 x PZ3	6
42104	5 x SW3	6
42105	5 x SW4	6
42106	5 x SW5	6
42107	5 x SW6	6
42108	5 x T10	6
42109	5 x T15	6
42110	5 x T20	6
42111	5 x T25	6
42112	5 x T27	6
42113	5 x T30	6
42150	5 x T40	6

in bulk pack

Order-No.		
42539	25 x PH2	1
42551	25 x PZ2	1
42548	25 x T20	1
42549	25 x T25	1
42550	25 x T30	1

XLSelector T bit set, 50 mm

Phillips, TORX®, hex 13-pcs. 1/4" **SB 7948-T950**

Order-No.		
41831		6
	1 x PH1 / 1 x PH2 / 1 x PH3	
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
	1 x SW3 / 1 x SW4 / 1 x SW5 / 1 x SW6	
	1 x Bit holder magnetic extra strong magnet, 1/4"	

•compared to Wiha standard bit

XLSelector T bit set, 25 mm

Phillips, TORX®, hex 31-pcs. 1/4" **SB 7948-T999**

Order-No.		
41830		6
	2 x PH1 / 4 x PH2 / 2 x PH3	
	2 x T10 / 2 x T15 / 4 x T20 / 2 x T25 / 2 x T30 / 2 x T40	
	2 x SW3 / 2 x SW4 / 2 x SW5 / 2 x SW6	
	1 x Bit holder magnetic extra strong magnet, 1/4"	

•compared to Wiha standard bit

Which drives are used for each individual product? Page 338

FlipSelector T bit set, 25 mm

Hexagon 16-pcs. 1/4"

SB 7947-T303

Order-No.		
41825		6
	3 x SW3 / 3 x SW4 / 3 x SW5 / 3 x SW6	
	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 13-pcs., 1/4"

SB 7947-T906

Order-No.		
41824		6
	1 x PH1 / 3 x PH2 / 1 x PH3	
	1 x PZ2	
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

assorted 1/4" 13-pcs.

SB 7947-T999

Order-No.		
41826		6
	1 x PH1 / 1 x PH2 / 1 x PH3	
	1 x PZ2	
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
	1 x SW4 / 1 x SW5 / 1 x SW6	
	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

T bit set, 50 mm

Order-No.		
41637	5 x PH1	6
41638	5 x PH2	6
41639	5 x PH3	6
41640	5 x PZ1	6
41641	5 x PZ2	6
41642	5 x PZ3	6
41650	5 x SW3	6
41651	5 x SW4	6
41652	5 x SW5	6
41653	5 x SW6	6
41643	5 x T10	6
41644	5 x T15	6
41645	5 x T20	6
41646	5 x T25	6
41647	5 x T27	6
41648	5 x T30	6
41649	5 x T40	6
41660	5 x #1	6
41662	5 x #2	6
41663	5 x #3	6

T bit set, 25 mm

Order-No.		
41598	5 x PH1	6
41599	5 x PH2	6
41600	5 x PH3	6
41601	5 x PZ1	6
41602	5 x PZ2	6
41603	5 x PZ3	6
41611	5 x SW3	6
41612	5 x SW4	6
41613	5 x SW5	6
41614	5 x SW6	6
41604	5 x T10	6
41605	5 x T15	6
41606	5 x T20	6
41607	5 x T25	6
41608	5 x T27	6
41609	5 x T30	6
41610	5 x T40	6
41621	5 x #1	6
41622	5 x #2	6
41623	5 x #3	6

in bulk pack

Order-No.		
42292	25 x PH2	1
42293	25 x PZ2	1
42301	25 x T20	1
42306	25 x T25	1
42302	25 x T30	1

XLSelector Y bit set, 50 mm

Phillips, Pozidriv, TORX®, 13-pcs., 1/4" **SB 7948-Y950**

Order-No.	
41834	6

2 x PH2

1 x PZ1 / 2 x PZ2 / 1 x PZ3

1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40

1 x Bit holder magnetic extra strong magnet, 1/4"

•compared to Wiha standard bit

XLSelector Y bit set, 25 mm

TORX® 31-pcs. 1/4" **SB 7948-Y505**

Order-No.	
41833	6

3 x T10 / 6 x T15 / 6 x T20 / 6 x T25 / 6 x T30 / 3 x T40

1 x Bit holder magnetic extra strong magnet 1/4"

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 31-pcs., 1/4" **SB 7948-Y904**

Order-No.	
41832	6

1 x PH1 / 4 x PH2 / 1 x PH3

2 x PZ1 / 4 x PZ2 / 2 x PZ3

2 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T30 / 2 x T40

1 x Bit holder magnetic extra strong magnet 1/4"

•compared to Wiha standard bit

Which drives are used for each individual product? Page 338

FlipSelector Y bit set, 25 mm

Pozidriv 1/4" 13-pcs. SB 7947-Y202

Order-No.		
41829		6
	2 x PZ1 / 8 x PZ2 / 2 x PZ3	
	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

TORX® 1/4" 13-pcs. SB 7947-Y505

Order-No.		
41828		6
	2 x T10 / 2 x T15 / 3 x T20 / 2 x T25 / 2 x T30 / 1 x T40	
	1 x Bit holder magnetic extra strong magnet 1/4"	

•compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 13-pcs., 1/4" SB 7947-Y904

Order-No.		
41827		6

Y bit set, 25 mm

Order-No.		
41585	5 x PH1	6
41586	5 x PH2	6
41587	5 x PH3	6
41588	5 x PZ1	6
41589	5 x PZ2	6
41590	5 x PZ3	6
41591	5 x T10	6
41592	5 x T15	6
41593	5 x T20	6
41594	5 x T25	6
41595	5 x T27	6
41596	5 x T30	6
41597	5 x T40	6

in bulk pack

Order-No.		
42294	25 x PH2	1
42295	25 x PZ2	1
42303	25 x T20	1
42304	25 x T25	1
42305	25 x T30	1

Y bit set, 50 mm

Order-No.		
41624	5 x PH1	6
41625	5 x PH2	6
41626	5 x PH3	6
41627	5 x PZ1	6
41628	5 x PZ2	6
41629	5 x PZ3	6
41630	5 x T10	6
41631	5 x T15	6
41632	5 x T20	6
41633	5 x T25	6
41634	5 x T27	6
41635	5 x T30	6
41636	5 x T40	6

Belt clip

for bit set BitBuddy® and FlipSelector 7945

Order-No.	
36990	10

Bit set XLSelector Standard 25 mm

assorted with bit ratchet form C 6.3 (1/4"), 17-pcs. **7948-043**

Order-No.	
36951	5
	1 x PH1 / 1 x PH2
	1 x PZ1 / 1 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x 3,0 / 1 x 4,0 / 1 x 5,0 / 1 x 6,0
	1 x Bit holder magnetic, 58 mm 1/4"
	1 x Bit ratchet 90 mm with thumb wheel Hexagon head, 1/4" in blister pack

Bit set XLSelector Standard 25 mm

assorted 1/4" 31-pcs. **7948-005**

Order-No.	
29417	5
	1 x 4,5 / 1 x 5,5 / 1 x 6,5
	2 x PH1 / 4 x PH2 / 1 x PH3
	2 x PZ1 / 5 x PZ2 / 1 x PZ3
	2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

assorted 1/4" 31-pcs. **7948-927**

Order-No.	
29416	5
	1 x 0 / 1 x 1 / 1 x 2 / 1 x 3 / 1 x 4
	1 x 4 / 1 x 6 / 1 x 8 / 1 x 10
	1 x TR2,0 / 1 x TR2,5 / 1 x TR3,0 / 1 x TR4,0 / 1 x TR5,0 / 1 x TR6,0
	1 x 6 / 1 x 8 / 1 x 10
	1 x T8H / 1 x T9H / 1 x T10H / 1 x T15H / 1 x T20H / 1 x T25H / 1 x T27H / 1 x T30H / 1 x T40H
	1 x #1 / 1 x #2 / 1 x #3
	1 x CentroFix quick release holder, magnetic, style E 6.3.

Bit set FlipSelector Standard 25 mm

assorted 1/4" 13-pcs. **7947-999**

Order-No.	
39078	10
	1 x 5,5
	1 x PH2
	1 x PZ1 / 1 x PZ2 / 1 x PZ3
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30
	1 x 3,0 / 1 x 4,0 / 1 x 5,0
	1 x Bit holder magnetic, 58 mm 1/4"

Slotted, Phillips, Pozidriv 1/4" 13-pcs. **7947-005**

Order-No.	
39029	10
	1 x 5,5
	1 x PH1 / 3 x PH2 / 1 x PH3
	1 x PZ1 / 4 x PZ2 / 1 x PZ3
	1 x Bit holder magnetic, 58 mm 1/4"

Phillips, Pozidriv, TORX®, 13-pcs., 1/4" **7947-904**

Order-No.	
39040	10
	2 x PH2
	1 x PZ1 / 2 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

Pozidriv, TORX® 1/4" 13-pcs. **7947-905**

Order-No.	
39041	10
	1 x PZ1 / 2 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

TORX® 1/4" 13-pcs. **7947-505**

Order-No.	
39124	10
	1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

Which drives are used for each individual product? Page 338

TORX® Tamper Resistant (with hole) 1/4" 13-pcs.

7947-505TR

Order-No.	
39037	10
	1 x T7H / 1 x T8H / 1 x T9H / 1 x T10H / 2 x T15H / 2 x T20H / 2 x T25H / 1 x T30H / 1 x T40H
	1 x Bit holder magnetic, 58 mm 1/4"

Hexagon 1/4" 11-pcs.

7947-902

Order-No.	
39039	10
	1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 2 x 3,0 / 2 x 4,0 / 1 x 5,0 / 1 x 6,0 / 1 x 8,0
	1 x Bit holder magnetic, 58 mm 1/4"

SIT (for Assy® and Pias screws), 13-pcs., 1/4"

7947-995

Order-No.	
39045	10
	2 x SIT 10 / 4 x SIT 20 / 3 x SIT 25 / 2 x SIT 30 / 1 x SIT 40
	1 x Bit holder magnetic, 58 mm 1/4"

Bit set FlipSelector Standard 25 mm

Slotted, Phillips, Pozidriv, 13-pcs., 1/4" with belt clip, in blister pack

SB 7947-005

Order-No.	
39049	5
	1 x 5,5
	1 x PH1 / 3 x PH2 / 1 x PH3
	1 x PZ1 / 4 x PZ2 / 1 x PZ3
	1 x Bit holder magnetic, 58 mm 1/4"

TORX®, 13-pcs., 1/4" with belt clip, in blister pack

SB 7947-505

Order-No.	
39056	5
	1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

TORX® Tamper Resistant (with drill hole), 13-pcs., 1/4" with belt clip, in blister pack

SB 7947-505TR

Order-No.	
39057	5
	1 x T7H / 1 x T8H / 1 x T9H / 1 x T10H / 2 x T15H / 2 x T20H / 2 x T25H / 1 x T30H / 1 x T40H
	1 x Bit holder magnetic, 58 mm 1/4"

Hex, 11-pcs., 1/4" with belt clip in blister pack

SB 7947-902

Order-No.	
39059	5
	1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 2 x 3,0 / 2 x 4,0 / 1 x 5,0 / 1 x 6,0 / 1 x 8,0
	1 x Bit holder magnetic, 58 mm 1/4"

Phillips, Pozidriv, TORX®, 13-pcs., 1/4" with belt clip, in blister pack

SB 7947-904

Order-No.	
39060	5
	2 x PH2
	1 x PZ1 / 2 x PZ2 / 1 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x Bit holder magnetic, 58 mm 1/4"

Mixed, 1/4", 13-pcs. with belt clip in blister pack

SB 7947-999

Order-No.	
39083	5
	1 x 5,5
	1 x PH2
	1 x PZ1 / 1 x PZ2 / 1 x PZ3
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30
	1 x 3,0 / 1 x 4,0 / 1 x 5,0
	1 x Bit holder magnetic, 58 mm 1/4"

Bit set Collector Standard 25 mm

Mixed, 32-pcs. in box, 1/4" **7928-913**

Order-No.	
34686	5
	1 x 4,5 / 1 x 5,5 / 1 x 6,5
	2 x PH1 / 5 x PH2 / 2 x PH3
	2 x PZ1 / 5 x PZ2 / 2 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x 4,0 / 1 x 5,0 / 1 x 6,0
	1 x Bit holder CentroFix Force mechanically lockable 1/4", magnetic
	1 x Screwdriver with bit holder SoftFinish® magnetic 1/4"

Bit set Collector Security Standard 25 mm

Mixed, 27-pcs. in box, 1/4" **7928-928**

Order-No.	
09393	5
	1 x T8H / 1 x T10H / 1 x T15H / 1 x T20H / 1 x T25H / 1 x T27H / 1 x T30H / 1 x T40H
	1 x 6 / 1 x 8 / 1 x 10
	1 x 1 / 1 x 2 / 1 x 3 / 1 x 4
	1 x 4 / 1 x 6 / 1 x 8 / 1 x 10
	1 x TR5/64 / 1 x TR3/32 / 1 x TR7/64 / 1 x TR1/8 / 1 x TR9/64 / 1 x TR5/32
	1 x Bit holder magnetic extra strong magnet, 1/4"
	1 x Screwdriver with bit holder SoftFinish® magnetic 1/4"

Bit set Collector Standard 25 mm

Mixed, 61-pcs. in box, 1/4" **7928-923**

Order-No.	
07943	5
	1 x 4,5 / 1 x 5,5 / 1 x 6,5 / 1 x 8,0
	7 x PH1 / 13 x PH2 / 3 x PH3
	7 x PZ1 / 13 x PZ2 / 3 x PZ3
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
	1 x 3,0 / 1 x 4,0 / 1 x 5,0 / 1 x 6,0
	1 x Bit holder CentroFix Force mechanically lockable 1/4", magnetic

Which drives are used for each individual product? Page 338

Bit set Standard 25 mm

assorted, 31-pcs. in box, 1/4"

7979-01

Order-No.		
26252		1
	1 x 4,5 / 1 x 5,5 / 1 x 6,5	
	2 x PH1 / 6 x PH2 / 1 x PH3	
	2 x PZ1 / 6 x PZ2 / 1 x PZ3	
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
	1 x 4,0 / 1 x 5,0 / 1 x 6,0	
	1 x Bit holder magnetic extra strong magnet 1/4"	

31-pcs. in box, 1/4"

7979-02

Order-No.		
26253		1
	5 x PZ1 / 10 x PZ2 / 3 x PZ3	
	2 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 2 x T30 / 2 x T40	
	1 x Bit holder magnetic extra strong magnet 1/4"	

31-pcs. in box, 1/4"

7979-03

Order-No.		
36310		1
	2 x PZ1 / 3 x PZ2 / 1 x PZ3	
	2 x T10 / 6 x T15 / 6 x T20 / 6 x T25 / 2 x T30 / 2 x T40	
	1 x Bit holder magnetic extra strong magnet 1/4"	

Bit Standard 25 mm

Slotted 1/4"

7010 Z

Order-No.		mm		
01623	4,5	25	0,6	10
01624	5,5	25	0,8	10
01626	6,5	25	1,2	10
01627	8,0	25	1,6	10

Phillips 1/4"

7011 Z

Order-No.		mm	
05298	PH0	25	10
01657	PH1	25	10
01658	PH2	25	10
01659	PH3	25	10
01649	PH4	32	10

Pozidriv 1/4"

7012 Z

Order-No.		mm	
05300	PZ0	25	10
01688	PZ1	25	10
01689	PZ2	25	10
01690	PZ3	25	10
01681	PZ4	32	10

TORX® 1/4"

7015 Z

Order-No.		mm	
26250	T3	25	10
25097	T4	25	10
01711	T5	25	10
01712	T6	25	10
01713	T7	25	10
01714	T8	25	10
01715	T9	25	10
01716	T10	25	10
01717	T15	25	10
01718	T20	25	10
01719	T25	25	10
01720	T27	25	10
01721	T30	25	10
01722	T40	25	10
01723	T45	35	10
01724	T50	35	10

TORX® conical 1/4"

7015K Z

Order-No.		mm	
04925	T10	25	10
04926	T15	25	10
04927	T20	25	10
04928	T25	25	10
04929	T27	25	10
04930	T30	25	10
04931	T40	25	10

TORX PLUS® 1/4"

7016 Z

Order-No.		mm	
25994	3IP	25	10
25996	4IP	25	10
25998	5IP	25	10
23173	6IP	25	10
23175	7IP	25	10
23177	8IP	25	10
23179	9IP	25	10
23181	10IP	25	10
23183	15IP	25	10
23185	20IP	25	10
23187	25IP	25	10
23189	27IP	25	10
23191	30IP	25	10
23193	40IP	25	10

TORX® Tamper Resistant (with hole) 1/4"

7015 Z TR

Order-No.		mm	
03115	T7H	25	10
03117	T8H	25	10
01726	T9H	25	10
01727	T10H	25	10
01728	T15H	25	10
01729	T20H	25	10
01730	T25H	25	10
01731	T27H	25	10
01732	T30H	25	10
01733	T40H	25	10

TORX PLUS® Security, 1/4"

7016 Z IPR

Order-No.		mm	
27530	8IPR	25	10
26346	10IPR	25	10
26347	15IPR	25	10
26348	20IPR	25	10
26349	25IPR	25	10
26350	30IPR	25	10
26351	40IPR	35	10

MagicRing® hexagonal ball end, 1/4"

7017R Z

Order-No.		mm	
22959	3,0	38	10
22960	4,0	38	10
22961	5,0	38	10
22962	6,0	38	10

Hexagonal ball end 1/4"

7017 Z

Order-No.		mm	
01734	1,5	38	10
01735	2,0	38	10
01736	2,5	38	10
01737	3,0	38	10
01738	4,0	38	10
01739	5,0	38	10
01740	6,0	38	10

MagicRing® hex 1/4"

7013R Z

Order-No.		mm	
22955	3,0	25	10
22956	4,0	25	10
22957	5,0	25	10
22958	6,0	25	10

Hexagon 1/4"

7013 Z

Order-No.		mm	
04011	1,5	25	10
01703	2,0	25	10
01704	2,5	25	10
01705	3,0	25	10
01706	4,0	25	10
01707	5,0	25	10
39875	5,5	25	10
01708	6,0	25	10
01709	8,0	25	10
01710	10,0	25	10

Hexagon with hole 1/4"

7013 Z TR

Order-No.		mm	
25560	TR2,0	25	10
25561	TR2,5	25	10
25562	TR3,0	25	10
25563	TR4,0	25	10
25564	TR5,0	25	10
26309	TR6,0	25	10
20558	TR5/64	25	10
20556	TR3/32	25	10
20559	TR7/64	25	10
20555	TR1/8	25	10
20560	TR9/64	25	10
20557	TR5/32	25	10
30050	TR3/16	25	10

Which drives are used for each individual product? Page 338

Internal square 1/4"

7018 Z

Order-No.			mm	
06634	#1	2,3	25	5
06635	#2	2,8	25	5
06636	#3	3,3	25	5

Spanner 1/4"

7019 Z SP

Order-No.		mm	
27064	4	25	10
27065	6	25	10
27066	8	25	10
27067	10	25	10

Triple square 1/4"

7019 Z XZN

Order-No.		mm	
26352	M3	25	10
26353	M4	25	10
26354	M5	25	10
26355	M6	25	10
26356	M8	35	10

SIT 1/4"

7019 Z SIT

Order-No.		mm	IC	
27256	SIT 10	25	pink	10
27257	SIT 20	25	orange	10
27258	SIT 25	25	green	10
27259	SIT 30	25	yellow	10
27260	SIT 40	25	light pink	10

Torq-Set® 1/4"

7019 Z TS

Order-No.		mm	
27030	0	25	10
27028	1	25	10
26249	2	25	10
26045	3	25	10
22591	4	25	10
22592	5	25	10
22593	6	25	10
22594	8	25	10
22595	10	25	10
25572	1/4	32	10

Tri-Wing® 1/4"

7019 Z TW

Order-No.		mm	
22603	0	25	10
22604	1	25	10
22605	2	25	10
22606	3	25	10
22607	4	25	10
22608	5	25	10

Bit DryWall Stop Standard 25 mm

Phillips 1/4"

7011 DWS

Order-No.		mm	
39382	PH2	25	10

INFOBOX:
TORX® tamper-resistant safety profile

- This safety profile is used to hinder unwanted access to equipment such as intercoms, thermostats and night-storage heaters.
- You can fasten the Torx® tamper resistant profile with both Torx® H screws and normal Torx® screws.

INFOBOX:
MagicRing®

Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

INFOBOX:
Ball end hex

Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

Bit set Standard 25 mm

Order-No.		
32055	10 x PH1	10
07855	3 x PH1	10
36275	20 x PH2	10
24733	10 x PH2	10
07856	3 x PH2	10
36280	10 x PH3	10
07857	3 x PH3	10
35709	20 x PZ1	10
32070	10 x PZ1	10
07859	3 x PZ1	10
36282	20 x PZ2	10
24742	10 x PZ2	10
07860	3 x PZ2	10
32071	10 x PZ3	10
07861	3 x PZ3	10
20542	1 x PZ4	10
35832	10 x T10	10
08421	2 x T10	10
34746	10 x T15	10
08422	2 x T15	10
24746	10 x T20	10
08423	2 x T20	10
08424	2 x T25	10
24748	10 x T25	10
26451	2 x T27	10
08425	2 x T30	10
08426	2 x T40	10
24750	10 x T30	10
36288	10 x T40	10
38649	2 x T10H	10
38650	2 x T15H	10
38651	2 x T20H	10
38652	2 x T25H	10
38653	2 x T30H	10
38654	2 x T40H	10
22655	1 x 4,01 x 5,01 x 6,0	10
38656	2 x 3,0	10
25681	2 x 4,0	10
25679	2 x 5,0	10
38657	2 x 6,0	10
38658	2 x #1 x 2,3	10
38659	2 x #2 x 2,8	10
38660	2 x #3 x 3,3	10

Standard bit reduced diameter: 25 mm

Order-No.		
35834	10 x PH2	10
36285	10 x PZ2	10

Bit set DryWall Stop 25 mm

Phillips, 2-pcs. in box, 1/4" — **7011 DWS**

Order-No.		
27077		1
	PH2 x 25	

Which drives are used for each individual product? Page 338

Bit set Standard 25 mm

Phillips (PH1), 50-pcs. in bulk pack, 1/4" 7011Z

Order-No.	
08047	1
PH1 x 25	

Phillips (PH2), 50-pcs. in bulk pack, 1/4" 7011Z

Order-No.	
08048	1
PH2 x 25	

Phillips (PH3), 50-pcs. in bulk pack, 1/4" 7011Z

Order-No.	
08049	1
PH3 x 25	

Pozidriv (PZ1), 50-pcs. in bulk pack, 1/4" 7012Z

Order-No.	
08056	1
PZ1 x 25	

Pozidriv (PZ2), 50-pcs. in bulk pack, 1/4" 7012Z

Order-No.	
08057	1
PZ2 x 25	

Pozidriv (PZ3), 50-pcs. in bulk pack, 1/4" 7012Z

Order-No.	
08058	1
PZ3 x 25	

TORX® (T10), 50-pcs. in bulk pack, 1/4" 7015Z

Order-No.	
08065	1
T10 x 25	

TORX® (T15), 50-pcs. in bulk pack, 1/4" 7015Z

Order-No.	
08066	1
T15 x 25	

TORX® (T20), 50-pcs. in bulk pack, 1/4" 7015Z

Order-No.	
08067	1
T20 x 25	

TORX® (T25), 50-pcs. in bulk pack, 1/4" 7015Z

Order-No.	
08068	1
T25 x 25	

TORX® (T27), 50-pcs. in bulk pack, 1/4" 7015Z

Order-No.	
29544	1
T27 x 25	

TORX® (T30), 50-pcs. in bulk pack, 1/4" 7015Z

Order-No.	
08069	1
T30 x 25	

TORX® (T40), 50-pcs. in bulk pack, 1/4" 7015Z

Order-No.	
08070	1
T40 x 25	

Bit set Standard 25 mm

Phillips (PH2), 100-pcs. in bulk pack, 1/4" 7930 Z

Order-No.	
40461	1
PH2 x 25	

Pozidriv (PZ2), 100-pcs. in bulk pack, 1/4" 7930 Z

Order-No.	
40462	1
PZ2 x 25	

TORX® (T20), 100-pcs. in bulk pack, 1/4" 7930 Z

Order-No.	
40463	1
T20 x 25	

TORX® (T25), 100-pcs. in bulk pack, 1/4" 7930 Z

Order-No.	
40464	1
T25 x 25	

TORX® (T30), 100-pcs. in bulk pack, 1/4" 7930 Z

Order-No.	
40465	1
T30 x 25	

Bit Professional

Slotted 1/4" 7040 Z

Order-No.	⊖	mm	⊖	
33961	2,5	70	0,4	5
01790	3,0	50	0,5	5
33962	3,0	70	0,5	5
01792	3,5	50	0,6	5
33963	3,5	70	0,6	5
01791	4,0	50	0,5	5
01794	4,0	50	0,8	5
33964	4,0	70	0,8	5
01793	4,5	50	0,6	5
01795	5,5	50	0,8	5
01796	5,5	50	1,0	5
33965	5,5	70	1,0	5
01798	6,5	50	1,2	5
33966	6,5	70	1,2	5
01799	8,0	50	1,2	5
01800	8,0	50	1,6	5

Phillips 1/4" 7041 Z

Order-No.	⊕	mm	
31960	PH00	50	5
31961	PH00	70	5
31962	PH00	90	5
32105	PH0	50	5
35456	PH0	70	5
35457	PH0	90	5
33703	PH1	50	5
01803	PH1	70	5
04126	PH1	90	5
23213	PH1	110	5
23219	PH1	127	5
22509	PH1	150	5
33704	PH2	50	5
01805	PH2	70	5
04009	PH2	90	5
05800	PH2	110	5
06888	PH2	127	5
22510	PH2	150	5
33705	PH3	50	5
04010	PH3	70	5
04127	PH3	90	5
23215	PH3	110	5
23217	PH3	127	5
22511	PH3	150	5

Which drives are used for each individual product? Page 338

Pozidriv 1/4"

7042 Z

Order-No.		mm	
31957	PZ0	50	5
31958	PZ0	70	5
31959	PZ0	90	5
33706	PZ1	50	5
01808	PZ1	70	5
01809	PZ1	90	5
23221	PZ1	110	5
23225	PZ1	127	5
23227	PZ1	150	5
33707	PZ2	50	5
01811	PZ2	70	5
01812	PZ2	90	5
05799	PZ2	110	5
06889	PZ2	127	5
23228	PZ2	150	5
33708	PZ3	50	5
04059	PZ3	70	5
04176	PZ3	90	5
23223	PZ3	110	5
23226	PZ3	127	5
22512	PZ3	150	5

PlusMinus/Phillips 1/4"

7049PHM

Order-No.		mm	
32490	SL/PH1	50	5
32491	SL/PH1	70	5
32686	SL/PH1	90	5
32492	SL/PH2	50	5
32493	SL/PH2	70	5
32687	SL/PH2	90	5

PlusMinus/Pozidriv 1/4"

7049PZM

Order-No.		mm	
32494	SL/PZ1	50	5
32495	SL/PZ1	70	5
32688	SL/PZ1	90	5
32496	SL/PZ2	50	5
32497	SL/PZ2	70	5
32689	SL/PZ2	90	5

TORX® ball end 1/4"

7045BE

Order-No.		mm	
32409	T9	50	5
32410	T10	50	5
32416	T10	70	5
32417	T15	50	5
32418	T15	70	5
32411	T20	50	5
32419	T20	70	5
32412	T25	50	5
32421	T25	70	5
32413	T27	50	5
32414	T30	50	5
32423	T30	70	5
32415	T40	50	5

TORX® MagicSpring® 1/4"

7045R

Order-No.		mm	
34452	T10	50	5
34453	T15	50	5
34454	T20	50	5
34455	T25	50	5
34456	T30	50	5
34457	T40	50	5

TORX® 1/4"

7045 Z

Order-No.		mm	
39184	T1	50	5
39185	T2	50	5
39186	T3	50	5
39187	T4	50	5
32299	T5	50	5
32302	T6	50	5
33709	T6	70	5
33717	T6	90	5
38370	T6	150	5
32303	T7	50	5
33710	T7	70	5
33718	T7	90	5
38371	T7	150	5
32304	T8	50	5
33711	T8	70	5
33719	T8	90	5
36327	T8	150	5
32305	T9	50	5
33712	T9	70	5
33720	T9	90	5
38372	T9	150	5
32306	T10	50	5
33713	T10	70	5
33721	T10	90	5

Order-No.		mm	
33725	T10	110	5
33726	T10	150	5
32307	T15	50	5
33714	T15	70	5
33722	T15	90	5
33727	T15	110	5
33728	T15	150	5
32308	T20	50	5
33715	T20	70	5
33723	T20	90	5
33729	T20	110	5
33730	T20	150	5
32309	T25	50	5
33716	T25	70	5
33724	T25	90	5
33731	T25	110	5
33732	T25	150	5
33920	T27	50	5
33921	T27	70	5
33922	T27	90	5
33923	T30	50	5
33924	T30	70	5
33925	T30	90	5
33926	T30	110	5
33927	T30	150	5
33928	T40	50	5
33929	T40	70	5
33930	T40	90	5
33931	T40	110	5
33932	T40	150	5

TORX® Tamper Resistant (with hole) 1/4"

7045 Z TR

Order-No.		mm	
21045	T7H	50	5
21047	T8H	50	5
20218	T9H	50	5
20219	T10H	50	5
39188	T10H	90	5
24867	T15H	50	5
39189	T15H	90	5
20220	T20H	50	5
39190	T20H	90	5
20221	T25H	50	5
39191	T25H	90	5
20222	T27H	50	5
39192	T27H	90	5
20223	T30H	50	5
39193	T30H	90	5
20224	T40H	50	5
39194	T40H	90	5

TORX PLUS® 1/4"

7046 Z

Order-No.		mm	
39195	1IP	50	5
39196	2IP	50	5
32486	3IP	50	5
39197	4IP	50	5
39198	4IP	90	5
28481	5IP	50	5
39199	5IP	90	5
31973	6IP	90	5
26000	6IP	50	5
26002	7IP	50	5
23195	8IP	50	5
31975	8IP	90	2
23197	9IP	50	5
23199	10IP	50	5
31977	10IP	90	5
23201	15IP	50	5
25553	15IP	90	5
23203	20IP	50	5
39200	20IP	90	5
23205	25IP	50	5
39201	25IP	90	5
23207	27IP	50	5
39202	27IP	90	5
23209	30IP	50	5
39203	30IP	90	5
23211	40IP	50	5
39204	40IP	90	5

Torq-Set® 1/4"

7049 TS

Order-No.		mm	
22596	4	50	5
22597	5	50	5
22598	6	50	5
22599	8	50	5
22600	10	50	5

Hexagonal ball end 1/4"

7047R Z

Order-No.		mm	
25739	3,0	50	5
25740	4,0	50	5
25741	5,0	50	5
25742	6,0	50	5

MagicRing® hex 1/4"

7043R Z

Order-No.		mm	
23145	3,0	50	5
23147	4,0	50	5
23149	5,0	50	5
23151	6,0	50	5

Which drives are used for each individual product? Page 338

Hexagon 1/4"

7043 Z

Order-No.		mm	
05301	1,5	50	5
05302	2,0	50	5
34554	2,0	70	5
39178	2,0	90	5
05303	2,5	50	5
34555	2,5	70	5
39179	2,5	90	5
04194	3,0	50	5
34556	3,0	70	5
39180	3,0	90	5
04195	4,0	50	5
34557	4,0	70	5
39181	4,0	90	5
04196	5,0	50	5
34558	5,0	70	5
39182	5,0	90	5
04197	6,0	50	5
34559	6,0	70	5
39183	6,0	90	5
04198	8,0	50	5
34560	8,0	70	5

Square 1/4"

7048 Z

Order-No.			mm	
06637	#1	2,3	50	5
39206	#1	2,3	90	5
06638	#2	2,8	50	5
39207	#2	2,8	90	5
06639	#3	3,3	50	5
39208	#3	3,3	90	5

Bit Professional

Bit Professional 70 mm

Order-No.		
38706	2 x PH1	10
38707	2 x PH2	10

Bit Professional 50 mm

Order-No.		
38676	2 x PH1	10
36193	2 x PH2	10
38677	2 x PH3	10
38679	2 x PZ1	10
38680	2 x PZ2	10
38681	2 x PZ3	10
32805	1 x T20	10
38684	2 x T10	10
38685	2 x T15	10
38686	2 x T20	10
38687	2 x T25	10
38688	2 x T27	10
38689	2 x T30	10
38690	2 x T40	10

Bit Professional 70 mm

Order-No.		
38708	2 x PH3	10
38709	2 x PZ1	10
38710	2 x PZ2	10
38711	2 x PZ3	10
36086	2 x SL/PZ1	10
36082	2 x SL/PZ2	10
32806	1 x T25	10
38712	2 x T10	10
38713	2 x T15	10
32808	1 x T20	10
38714	2 x T20	10
38715	2 x T25	10
38716	2 x T27	10
38717	2 x T30	10
38718	2 x T40	10

Bit set Professional 70 mm

TORX® ball end 1/4" in bit band 10-pcs. **7045BE 9570**

Order-No.	
32804	1
	2 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 2 x T30

Micro-bit set ESD

Mixed 65-pcs. in box **7000 SK65 ESD**

Order-No.	
39971	1
	1 x 0,8 / 1 x 1,2 / 1 x 1,5 / 1 x 1,8 / 1 x 2,0 / 1 x 2,5 / 1 x 3,0 / 1 x 3,5 / 1 x 4,0
	1 x 0,7 / 1 x 0,9 / 2 x 1,3 / (0,050") / 1 x 1,5 / 1 x 2,0 / 1 x 2,5 / 1 x 3,0 / 2 x 4,0 / (5/32") / 1 x 3/32 / 1 x 1/16 / 1 x 5/64 / 1 x 7/64 / 1 x 1/8 / 1 x 9/64
	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20
	1 x PL1 / 1 x PL2 / 1 x PL3 / 1 x PL4 / 1 x PL5 / 1 x PL6
	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
	1 x 5/64 / 1 x 3/32 / 1 x 7/64 / 1 x 1/8 / 1 x 9/64 / 1 x 5/32 / 1 x 3/16 / 1 x 7/32 / 1 x 2,0 / 1 x 2,5 / 1 x 3,0 / 1 x 3,5 / 1 x 4,0 / 1 x 4,5 / 1 x 5,0 / 1 x 5,5
	1 x Adapter 1/4" for micro-bits 4 mm drive /
	1 x Bit ratchet 90 mm with thumb wheel Hexagon head, 1/4" in blister pack
	Screwdriver handle, PicoFinish® ESD magnetic
	1 x Extension 100 mm for ESD screwdriver handle and micro-bits

INFOBOX:
TORX® ball end

Wiha TORX® ball end

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.

Which drives are used for each individual product? Page 338

Slotted drive 4 mm

7000 4 Z

Order-No.	⊖	mm	⊖	
40600	0,8	28	0,20	10
40601	1,2	28	0,25	10
40602	1,5	28	0,25	10
40603	1,8	28	0,30	10
40604	2,0	28	0,40	10
40605	2,5	28	0,40	10
40606	3,0	28	0,50	10
40607	3,5	28	0,60	10
40608	4,0	28	0,80	10

Phillips drive 4 mm

7001 4 Z

Order-No.	⊕	mm	
40609	PH000	28	10
40610	PH00	28	10
40611	PH0	28	10
40612	PH1	28	10
40613	PH2	28	10

Hexagon drive 4 mm

7003 4 Z

Order-No.	◉	mm	
40614	0,7	28	10
40615	0,9	28	10
40616	1,3 / (0,050")	28	10
40617	1,5	28	10
40618	2,0	28	10
40619	2,5	28	10
40620	3,0	28	10
40621	4,0 / (5/32")	28	10
40622	1/16	28	10
40623	5/64	28	10
40624	3/32	28	10
40625	7/64	28	10
40626	1/8	28	10
40627	9/64	28	10

TORX® drive 4 mm

7005 4 Z

Order-No.	✱	mm	
40628	T1	28	10
40629	T2	28	10
40630	T3	28	10
40631	T4	28	10
40632	T5	28	10
40633	T6	28	10
40634	T7	28	10
40635	T8	28	10
40636	T9	28	10
40637	T10	28	10
40638	T15	28	10
40639	T20	28	10

Pentalobe drive 4 mm

7009 4 Z

Order-No.	✱	mm	
40640	PL1	28	10
40641	PL2	28	10
40642	PL3	28	10
40643	PL4	28	10
40644	PL5	28	10
40645	PL6	28	10

INFOBOX:
Pentalobe

The security profile for Apple devices.

- Ideal for repairing Apple smartphones, tablets and notebooks.
- Note: The guarantee and warranty conditions of the device manufacturer must be observed.

Micro nut driver 30 mm

Hexagon socket drive 4 mm

7044 4 Z

Order-No.	○	mm	
40654	2,0	30	10
40655	2,5	30	10
40656	3,0	30	10
40657	3,5	30	10
40658	4,0	30	10
40659	4,5	30	10
40660	5,0	30	10
40661	5,5	30	10
40646	5/64	30	10
40647	3/32	30	10
40648	7/64	30	10
40649	1/8	30	10
40650	9/64	30	10
40651	5/32	30	10
40652	3/16	30	10
40653	7/32	30	10

Extension 100 mm

for ESD screwdriver handle and micro-bits

7103

Order-No.	○	◉	mm	
40663	4	4	100	10

Adapter 1/4"

for micro-bits 4 mm drive

7103

Order-No.	◉	○	
39964	4	1/4	10

Bit holder magnetic

for micro-bits 4 mm drive

7110

Order-No.	○	◉	mm	
32505	4	1/4	60	10

Bit with thread

Phillips M4

7311 Z

Order-No.	⊕	mm	●			
01937	PH1	33	5,5	M4	8,00	10
01938	PH2	33	6,0	M4	8,00	10

Pozidriv M4

7312 Z

Order-No.	⊕	mm	●			
01939	PZ1	33	5,5	M4	8,00	10
01940	PZ2	33	6,0	M4	8,00	10

Phillips M5

7321 Z

Order-No.	⊕	mm	●			
01942	PH2	33	7,0	M5	8,00	10
01943	PH2	45	6,0	M5	8,00	10

Pozidriv M5

7322 Z

Order-No.	⊕	mm	●			
01945	PZ2	33	7,0	M5	8,00	10
01946	PZ2	45	6,0	M5	8,00	10

TORX® M5

7325 Z

Order-No.	✱	mm	●			
35400	T10	45	6,0	M5	8,00	10
35401	T15	45	6,0	M5	8,00	10
35402	T20	45	6,0	M5	8,00	10
35403	T25	45	6,0	M5	8,00	10

Phillips M6

7331 Z

Order-No.	⊕	mm	●			
04678	PH2	33	8,0	M6	8,00	10
04677	PH2	45	8,0	M6	8,00	10

Which drives are used for each individual product? Page 338

Pozidriv M6

7332 Z

Order-No.		mm				
04671	PZ2	33	8,0	M6	8,00	10
04670	PZ2	45	8,0	M6	8,00	10

Phillips UNF 10/32"

7341 Z

Order-No.		mm				
01947	PH2	45	6,0	10/32 UNF	8,00	10

Pozidriv UNF 10/32"

7342 Z

Order-No.		mm				
01948	PZ2	45	6,0	10/32 UNF	8,00	10

Combination drill bit set

1/4" 5-pcs.

79187 B5

Order-No.		
28026		1
	M3 x 36 / M4 x 39 / M5 x 41 / M6 x 44 / M8 x 51	

Combination drill bit

1/4"

7807

Order-No.		mm		
27897	M3	36	1/4	10
27898	M4	39	1/4	10
27899	M5	41	1/4	10
27900	M6	44	1/4	10
27901	M8	51	1/4	10
27963	M10	65	1/4	10

Countersink bit set

1/4" 5-pcs.

79186 B5

Order-No.		
28027		1
	6,3 x 35 / 8,3 x 35 / 10,4 x 35 / 12,4 x 35 / 16,5 x 35	

Countersink bit

1/4"

7806

Order-No.		mm			Ø min.	
27892	6,3	35	1/4	M3	1,5	10
27893	8,3	35	1/4	M4	2,0	10
27894	10,4	35	1/4	M5	2,5	10
27895	12,4	35	1/4	M6	2,8	10
27896	16,5	35	1/4	M8	3,2	10
28058	20,5	35	1/4	M10	3,5	10

Nut driver insert

Hexagon head 1/4" 7044

Order-No.	○	mm	
04514	5,0	55	5
04513	5,5	55	5
04512	6,0	55	5
04511	7,0	55	5
04510	8,0	55	5
04509	10,0	55	5
04508	13,0	55	5
04515	1/4	55	5
04516	5/16	55	5
04517	3/8	55	5

Nut driver insert, magnetic

Hexagon head 1/4" 7044 M

Order-No.	○	mm	
04637	5,0	55	5
04636	5,5	55	5
04635	6,0	55	5
04634	7,0	55	5
04633	8,0	55	5
04632	10,0	55	5
04631	13,0	55	5
04638	1/4	55	5
04639	5/16	55	5
04640	3/8	55	5

Tool shaft

Square, Internal hexagon C6,3 7210

Order-No.	▣	◉		
01933	1/4	1/4	25	5
04204	3/8	1/4	30	5

Tool shaft

Square, Internal hexagon C6,3 7240

Order-No.	▣	◉			
04685	1/4	1/4	100	B	5
01935	1/4	1/4	50		5
04684	3/8	1/4	100		5
04362	3/8	1/4	50		5

Adapter DIN 7428.

Connector with retaining ring

Hexagon head, Square head form G 6.3 + G 10 + G 12.5 7201

Order-No.	○	○:			
01924	1/4"	1/4 "	25	D 6,3	2
01926	1/4"	3/8 "	30	D 6,3	2
01922	1/4"	1/2 "	35	D 6,3	2
01927	5/16"	3/8 "	30	D 8	2
01923	5/16"	1/2 "	35	D 8	2

Connector with quick release holder

Hexagon head, Square head form G 12.5 7203

Order-No.	○	▣		
01930	1/4	1/2	50	2

Which drives are used for each individual product? Page 338

Hand impact screwdriver set

Mixed, 6-pcs. in box, 1/2" **24636**

Order-No.		
32573		1
	Hand impact screwdriver Internal square 1/2"	
	9 x 1,6 / 11 x 1,6	
	PH2 x 5/16 / PH3 x 5/16	
	Heavy-duty bit holder clamping with ball Hexagon head, internal square form C 8 (5/16"), 1/2"	

Hand impact screwdriver

Internal square 1/2" **24636**

Order-No.		mm	
32556	1/2	163	1

Heavy-duty bit holder clamping with ball

Hexagon head, internal square form C 8 (5/16"), 1/2" **7204Z-516**

Order-No.			mm	
32547	5/16	1/2	38	5

Bit holder CentroFix Force mechanically lockable

reddot award 2015 winner

1/4", magnetic — **7148 CF**

Order-No.	○	◉	mm	
39133	1/4	1/4	60	1

Bit holder CentroFix mechanically lockable

1/4" — **7148C**

Order-No.	○	◉	mm	
32477	1/4	1/4	60	10

Bit holder CentroFix Super Slim mechanically lockable

reddot award 2015 winner

1/4", magnetic — **7148 CS**

Order-No.	○	◉	mm	
39134	1/4	1/4	66	1

Bit holder MagicFlip Force magnetic

reddot award 2015 winner

iF product design award 2013

with ring magnet, 1/4" — **7123**

Order-No.	○	◉	mm	
36800	1/4	1/4	62	10

INFOBOX: Drive systems and matching bits

Bit holder	suitable for
CentroFix Force	C 6.3, E 6.3 und 1/4" drives
CentroFix SuperSlim	C 6.3
MagicFlip Force	C 6,3

INFOBOX: CentroFix Force

CentroFix Force

- Suitable for all bits with 1/4" hex drive style C6.3 and E6.3.
- SelfLock: The bit is locked mechanically and held securely when inserted.
- EasyOut: When unlocked, the bit moves into the ideal removal position.

INFOBOX: CentroFix SuperSlim

- Up to 30% reduced outer diameter compared to "conventional" quick release holders.
- Improved screw accessibility in confined holes.
- SelfLock: The bit is locked mechanically and held securely when inserted.
- EasyOut: When unlocked, the bit moves into the ideal removal position.

Which drives are used for each individual product? Page 338

Bit holder magnetic, clamping with retaining ring

1/4" — 7143

Order-No.			mm	
01913	1/4	1/4	72	2
36092	1/4	1/4	100	5
34306	1/4	1/4	150	5
36093	1/4	1/4	200	5
36094	1/4	1/4	250	5

Bit holder clamping with retaining ring

1/4" — 7140

Order-No.			mm	
01910	1/4	1/4	57	5

Bit holder magnetic, 74 mm

1/4" — 7113

Order-No.			mm	
01894	1/4	1/4	74	10

Bit holder magnetic

extra strong magnet, 1/4" — 7113 P

Order-No.			mm	
41922	1/4	1/4	60	10

Bit holder magnetic, 58 mm

1/4" — 7113 S

Order-No.			mm	
01895	1/4	1/4	58	10

1/4" in blister pack — 7113 S

Order-No.			mm	
07869	1/4	1/4	58	10

Universal holder, magnetic/ retaining ring, style G 7.

— 7183

Order-No.			mm	
01919	1/4	G7	72	2

Industrial bit holder, with magnet, Halfmoon 4 mm.

— 7110H

Order-No.		mm	
36112	4	50	1

INFOBOX:
MagicFlip Force

- Facilitates the fastening of long wood screws.
- Optimal holding force thanks to extremely powerful Neodym ring magnet.
- FlipBack: The actuating sleeve automatically springs back during recessing.
- Magnet On/Off: The ring magnet can be "deactivated" by pushing the actuating sleeve back.

Screwdriver with bit holder SoftFinish® magnetic

1/4" — **384**

Order-No.			mm		
01475	1/4	125	225	36	10
01476	1/4	300	400	36	5

Screwdriver with bit holder SoftFinish® clamping with retaining ring

flexible shaft, 1/4" — **386**

Order-No.			mm		
01479	1/4	150	268	36	10

Screwdriver with bitholder, Quick-release holder

1/4" — **387 01**

Order-No.			mm		
25874	1/4	35	146	30	10

Screwdriver with SoftFinish® CentroFix bit holder, mechanically lockable

1/4" — **387 02**

Order-No.			mm		
40331	1/4	38	149	36	10

Screwdriver with bit holder SoftFinish® magnetic

1/4" — **281 02**

Order-No.				
32160	1/4	125	36	10

Which drives are used for each individual product? Page 338

Screwdriver with bit holder magnetic

Stubby, 1/4" — 281 01

Order-No.				
29463	1/4	57	34	10

Screwdriver with bit holder ESD

Stubby, 1/4" — 281-01ESD

Order-No.				
32484	1/4	57	34	10

Handle: IEC 61340-5-1.

Screwdriver with bit holder SoftFinish® ESD, mechanically lockable

1/4" — 387ESD

Order-No.			mm		
32161	1/4	38	148	30	5

Handle: IEC 61340-5-1.

Screwdriver handle, PicoFinish® ESD magnetic

For 4 mm MicroBits — 281P

Order-No.		mm	
43709	4	96	

Screwdriver with T-handle and bit holder magnetic

1/4" — 388

Order-No.				
01481	1/4	150	80	10

Screwdriver with T-handle and two bit holders ComfortGrip magnetic

1/4" — 388DS

Order-No.				
26179	1/4	150	100	10

High-performance offset screwdriver with quick release holder 1/4"

1/4" in blister pack — 24628

Order-No.				max. Nm	
32310	1/4	1/4	165	57	1

Offset screwdriver with bit holder 1/4", magnetic

1/4" in blister pack — 24629

Order-No.				max. Nm	
32311	1/4	1/4	130	14	1

Pliers

A cut above the rest for your health.

Wiha pliers combine high-quality materials with ergonomic comfort. Precise interaction between the joints and the exact workmanship of the blades and gripping surfaces ensure optimum functionality. Ergonomically designed and crafted to a high quality standard, they are comfortable to use, causing less body fatigue and thus making work more efficient.

The “OptiGrip” triple-point support design for combination and high-leverage combination pliers ensure an optimum, secure hold when handled. The circlip pliers from the Classic Series with their MagicTips® precision tips made of high-performance steel provide added safety and stability. With its angled plier shape, the Wiha Inomic® VDE product line is kind to the user's joints, muscles and tendons. Wiha also supplies suitable tools for stripping, skinning and crimping.

Application

Pliers

For applications in electrics

Installation pliers TriCut Professional electric
Page 287

BiCut® Professional electric high-performance diagonal cutters with DynamicJoint®
Page 288

Heavy-duty diagonal cutters Professional electric with DynamicJoint®
Page 289

Combination pliers Professional electric with DynamicJoint® and OptiGrip
Page 290

Needle nose pliers Professional electric
Page 291

Cable cutter Professional electric
Page 293

Water pump pliers Professional electric, with push button adjustment
Page 293

Hacksaw electric
Page 295

Stripping tool automatic
Page 295

Stripping tool
Page 296

Automatic crimp tool, for wire-end sleeves hex crimping
Page 298

For applications in mechanics

Professional BiCut® high-performance diagonal cutters with DynamicJoint®, Switchable
Page 301

Heavy-duty diagonal cutters Professional with DynamicJoint®
Page 303

Combination pliers Professional with DynamicJoint® and OptiGrip
Page 304

Needle-nose pliers Professional
Page 306



Plastic diagonal cutters Classic, with opening spring without bevelled edge
Page 307

Pliers wrench Classic
Page 308

Water pump pliers QuickFix Professional automatic
Page 310

Classic circlip pliers with MagicTips®, straight
Page 312

For applications in electronics

Pliers set Professional ESD
Page 316

Needle nose pliers Professional ESD
Page 319

Universal tweezers Professional ESD
Page 320

Needle nose pliers Electronic
Page 323

Pliers set Professional electric

Combination pliers, needle nose pliers, diagonal cutters 3-pcs.		**Z 99 0 001 06**
Order-No.		
26852	1	

Trimming / cutting

- Professional electric diagonal cutters with DynamicJoint® 160 x 6 1/2" (43335)

Supplying / holding

- Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, VDE and GS tested / 180mm, 7" (26708)
- Needle nose pliers Professional electric with cutting edge straight shape, VDE and GS tested / 200mm, 8" (26727)

Manufactured acc. to IEC 60900.

Pliers set Industrial electric

Combination pliers, needle nose pliers, diagonal cutters 3-pcs.		**Z 99 0 001 09**
Order-No.		
38637	1	

Trimming / cutting

- Industrial electric diagonal cutters with DynamicJoint® 160 x 6 1/2" (43336)

Supplying / holding

- Industrial electric combination pliers with DynamicJoint® and OptiGrip with extra long cutting edge, VDE and GS tested / 180mm, 7" (33186)
- Industrial electric needle nose pliers with cutting edge straight shape, VDE and GS tested / 200mm, 8" (33178)

Manufactured acc. to IEC 60900.

INFOBOX:

Professional pliers Industrial pliers

Professional

Industrial

- Professional: pliers, chrome-plated
- Industrial: pliers, polished/black oxidised

Which drives are used for each individual product? Page 338

Installation pliers TriCut Professional electric

Z 14 1 06

Order-No.	mm			Ø mm	SB	
38552	170	7	13	1.6		5
38853	170	7	13	1.6	x	5

Manufactured acc. to IEC 60900.

Installation pliers TriCut Classic

Z 14 1 01

Order-No.	mm			Ø mm	SB	
38627	170	7	13	1.6		5
38854	170	7	13	1.6	x	5

INFOBOX:
VDE-certified tools

Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task
- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.
This is achieved by complying with the five safety rules:
- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

Stripping diagonal cutters Professional electric with DynamicJoint®

Z 14 0 06

Order-No.	mm	"		Ø mm	SB	
26745	160	6 ½	13	1.6		5
27431	160	6 ½	13	1.6	x	5

DIN ISO 5749. Manufactured acc. to IEC 60900.

Professional electric diagonal cutters with DynamicJoint®

Z 12 1 06

Order-No.	mm	"		Ø mm	SB	
43326	140	5 1/2"	16	1,6		5
43453	140	5 1/2"	16	1,6	x	5
43335	160	6 1/2"	17	2		5
43458	160	6 1/2"	17	2	x	5
43340	180	7"	18	2,3		5
43463	180	7"	18	2,8	x	5

Manufactured acc. to IEC 60900.

BiCut® Professional electric high-performance diagonal cutters with DynamicJoint®

reddot award 2014 winner

Switchable

Z 18 0 06

Order-No.	mm	"		Ø mm	SB	
38191	200	8	21	3		5
38984	200	8	21	3	x	5

Manufactured acc. to IEC 60900.

Industrial electric diagonal cutters with DynamicJoint®

Z12109

Order-No.	mm	"		Ø mm	SB	
43327	140	5 1/2"	16	1,6		5
43454	140	5 1/2"	16	1,6	x	5
43336	160	6 1/2"	17	2		5
43459	160	6 1/2"	17	2	x	5
43341	180	6"	18	2,8		5
43464	180	7"	18	2,8	x	5

Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

Heavy-duty diagonal cutters Professional electric with DynamicJoint®

+40% Power · 1000 V IEC 60900

with switchable opening spring — **Z 16 3 06**

Order-No.	mm			Ø mm	SB	
40921	160	6,5	17	2		5
41309	160	6,5	17	2	x	5
41274	180	7	18	2,3		5
41319	180	7	18	2,3	x	5
41279	200	8	19	2,5		5
41329	200	8	19	2,5	x	5

DIN ISO 5749. Manufactured acc. to IEC 60900.

Industrial electric heavy-duty diagonal cutters with DynamicJoint®

+40% Power · 1000 V IEC 60900

with switchable opening spring — **Z 16 3 09**

Order-No.	mm			Ø mm	SB	
40922	160	6,5	17	2		5
41310	160	6,5	17	2	x	5
41275	180	7	18	2,3		5
41320	180	7	18	2,3	x	5
41280	200	8	19	2,5		5
41330	200	8	19	2,5	x	5

DIN ISO 5749. Manufactured acc. to IEC 60900.

INFOBOX:
DynamicJoint®

+20 % Power

Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

INFOBOX:
Heavy-duty diagonal cutters

with switchable opening spring

- Up to 40% more cutting force thanks to optimised leverage.
- Opening spring with on/off function for fatigue-free work.
- Opening spring can be activated with just one hand.

Combination pliers Professional electric with DynamicJoint® and OptiGrip

with extra long cutting edge — Z 01 0 06

Order-No.	mm			Ø mm	SB	
26705	160	6 ½	15	1.6		5
27328	160	6 ½	15	1.6	x	5
26708	180	7	16	1.8		5
27418	180	7	16	1.8	x	5
26711	200	8	17	2		5
27419	200	8	17	2	x	5

DIN ISO 5746. Manufactured acc. to IEC 60900.

High-leverage combination pliers Professional electric with DynamicJoint® and OptiGrip

with extra long cutting edge — Z 02 0 06

Order-No.	mm			Ø mm	SB	
26714	200	8	18	2.3		5
27420	200	8	18	2.3	x	5
26717	225	9	19	2.5		5
27421	225	9	19	2.5	x	5

DIN ISO 5746. Manufactured acc. to IEC 60900.

Industrial electric combination pliers with DynamicJoint® and OptiGrip

with extra long cutting edge — Z 01 0 09

Order-No.	mm			Ø mm	SB	
33186	180	7	16	1.8		5
38855	180	7	16	1.8	x	5

DIN ISO 5746. Manufactured acc. to IEC 60900.

High-leverage industrial electric combination pliers with DynamicJoint® and OptiGrip

Z 02 0 09

Order-No.	mm			Ø mm	SB	
35465	225	9	19	2.5		5
38856	225	9	19	2.5	x	5

DIN ISO 5746. Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

Industrial lineman's pliers with DynamicJoint®

with extra long cutting edge **Z 02 2 02**

Order-No.	mm			Ø mm	SB	
40927	250	10	20	2.5		5

Classic lineman's pliers with DynamicJoint®

with extra long cutting edge **Z 02 2 01**

Order-No.	mm			Ø mm	SB	
40709	250	10	20	2.5		5
41218	250	10	20	2.5	x	5

Needle nose pliers Professional electric

with cutting edge straight shape **Z 05 0 06**

Order-No.	mm			Ø mm	SB	
26720	160	6 ½	16	1.2		5
27422	160	6 ½	16	1.2	x	5
26727	200	8	17	1.6		5
27423	200	8	17	1.6	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Industrial electric needle nose pliers

with cutting edge straight shape **Z 05 0 09**

Order-No.	mm			Ø mm	SB	
35477	160	6 1/2	16	1.2		5
38857	160	6 1/2	16	1.2	x	5
33178	200	8	17	1.6		5
38858	200	8	17	1.6	x	1

DIN ISO 5745. Manufactured acc. to IEC 60900.

INFOBOX:
OptiGrip

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Needle nose pliers Professional electric

with cutting edge curved shape, approx. 40°

Z 05 1 06

Order-No.	mm	"		Ø mm	SB	
26728	160	6 ½	16	1.2		5
27424	160	6 ½	16	1.2	x	5
26729	200	8	17	1.6		5
27425	200	8	17	1.6	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Long flat-nose pliers Professional electric

Z 07 0 06

Order-No.	mm	"	SB	
26732	160	6 ½		5
27426	160	6 ½	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Industrial electric needle nose pliers

with cutting edge curved shape, approx. 40°

Z 05 1 09

Order-No.	mm	"		Ø mm	SB	
35462	200	8	17	1.6		5
38859	200	8	17	1.6	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Long round-nose pliers Professional electric

Z 09 0 06

Order-No.	mm	"	SB	
26735	160	6 ½		5
27427	160	6 ½	x	5

DIN ISO 5745. Manufactured acc. to IEC 60900.

Which drives are used for each individual product? Page 338

Cable cutter Professional electric

1000 V IEC 60900

Z 50 1 06

Order-No.	mm			mm²	SB	
34743	160	6 ½	16	50		5
35704	160	6 ½	16	50	x	5
34744	200	8	20	60		5
35705	200	8	20	60	x	5

Manufactured acc. to IEC 60900.

Industrial electric cable cutter

1000 V IEC 60900

Z 50 1 09

Order-No.	mm			mm²	SB	
38636	160	6 ½	16	50		5
38865	160	6 ½	16	50	x	5
35479	200	8	20	60		5
38866	200	8	20	60	x	5

Manufactured acc. to IEC 60900.

Cable cutter Classic

Z 50 1 01

Order-No.	mm			mm²	SB	
34729	160	6 ½	16	50		5
36217	160	6 ½	16	50	x	5
34730	200	8	20	60		5
36981	200	8	20	60	x	5

Water pump pliers Professional electric

1000 V IEC 60900

box type

Z 21 0 06

Order-No.	mm				SB	
33520	250	10	2	50		5
38631	250	10	2	50	x	5

DIN ISO 8976. Manufactured acc. to IEC 60900.

Water pump pliers Professional electric

1000 V IEC 60900

with push button adjustment

Z 22 0 06

Order-No.	mm				SB	
37450	250	10	2	50		5
38632	250	10	2	50	x	5

DIN ISO 8976. Manufactured acc. to IEC 60900.

Stripping pliers Professional electric

1000 V IEC 60900

Z 55 0 06

Order-No.	mm	"	Ø	mm²	SB	
26847	160	6 ½	5	10		5
27437	160	6 ½	5	10	x	5

DIN ISO 5743. Manufactured acc. to IEC 60900.

Stripping pliers Industrial

Z 55 0 02

Order-No.	mm	"	Ø	mm²	SB	
32345	160	6 ½	5	10		5
34313	160	6 ½	5	10	x	5

DIN ISO 5743.

Industrial electric stripping pliers

1000 V IEC 60900

Z 55 0 09

Order-No.	mm	"	Ø	mm²	SB	
36711	160	6 1/2	5	10		5
38867	160	6 1/2	5	10	x	5

DIN ISO 5743. Manufactured acc. to IEC 60900.

Stripping pliers Classic

Z 55 0 01

Order-No.	mm	"	Ø	mm²	SB	
26845	160	6 ½	5	10		5
27368	160	6 ½	5	10	x	5

DIN ISO 5743.

Stripping pliers Professional

Z 55 0 05

Order-No.	mm	"	Ø	mm²	SB	
26846	160	6 ½	5	10		5

DIN ISO 5743.

Which drives are used for each individual product? Page 338

Stripping tool automatic

up to 16 mm² in blister pack — **Z 57 0 06**

Order-No.	mm		mm²	AWG	SB	
42062	200	8	0,03 - 16	32-5	x	1

Stripping tool automatic

up to 6 mm² in blister pack — **24675**

Order-No.	mm		mm²	AWG	SB	
36050	190	7 ½	0,2-6,0	24-10	x	1

Spare blade and gripping jaw set

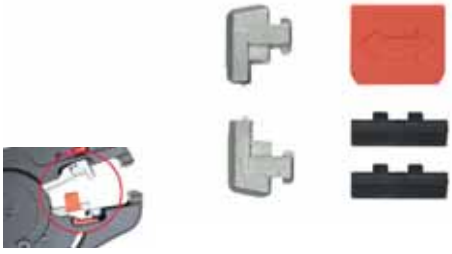

for automatic stripping tool — **Z 57 0 001 06K**

Order-No.	
42162	1

Hacksaw electric

insulated with three saw blades 150 mm — **246176**

Order-No.		mm	SB	
43125	150	280	x	1

INFOBOX:

Stripping tool, automatic up to 16mm²

- These pliers can handle a wide range of cables, thus combining two pairs of pliers in one.
- The supplied damper can be used to lessen recoil caused by larger cable gauges, such as those greater than 6 mm², thus helping to protect wrists.
- Precise cutting to length thanks to adjustable longitudinal stop.
- Integrated hand protection along the cutting edge guards against injury.

Stripping tool

with self-rotating trailing blade 24622

Order-No.	mm	ⅡⅡ	Ø mm	SB	
35969	165	6½	4,0-28		1
35538	165	6½	4,0-28	x	1

Stripping tool

for coaxial cable, in blister pack 24676

Order-No.	mm	ⅡⅡ	mm²	SB	
36051	110	4¼	4,8-7,5	x	1

Cable stripping knife

1000 V IEC 60900

straight cutting edge for round cables in blister pack 24680

Order-No.	mm	ⅡⅡ	SB	
38798	200	8	x	1

Manufactured acc. to IEC 60900.

Stripping tool

for round cable, in blister pack 24677

Order-No.	mm	ⅡⅡ	mm²	SB	
36052	125	5	8-13	x	1

Cable stripping knife

1000 V IEC 60900

hooked blade with sliding shoe for round cable, in blister pack 24678

Order-No.	mm	ⅡⅡ	SB	
36053	200	8	x	1

Manufactured acc. to IEC 60900.

Crimping pliers Classic

Z 60 0 01

Order-No.	mm		mm²	
28330	145	5 ¾	0,25-2,5	5

DIN ISO 5743.

Crimping pliers Professional electric

1000 V IEC 60900

Z 60 0 06

Order-No.	mm		mm²	SB	
35861	145	5 ¾	0,25-2,5		5
38985	145	5 ¾	0,25-2,5	x	5

DIN ISO 5743. Manufactured acc. to IEC 60900.

Crimping pliers Classic

Z 60 0 01

Order-No.	mm		mm²	
30066	180	7	0,25-16	5

DIN ISO 5743.

Crimping pliers Professional electric

1000 V IEC 60900

Z 60 0 06

Order-No.	mm		mm²	SB	
35862	180	7	0,25-16		5
38986	180	7	0,25-16	x	5

DIN ISO 5743. Manufactured acc. to IEC 60900.

Automatic crimp tool

for wire-end sleeves hex crimping

Z 62 0 06

Order-No.	mm	mm²	AWG	
41246	210	0,08-16	28-5	1

For processing twin sleeves and wire-end sleeves with or without insulating collar as per DIN 46228 & EN 50027

Crimp tool

for wire-end sleeves

Z 62 0 06

Order-No.	mm	mm²	AWG	SB	
33844	220	0,14-16	26-5		1
40342	220	0,14-16	26-5	x	1

For processing of wire-end sleeves with and without isolating collar according to DIN 46228, EN 50027.

Crimp tool

for insulated cable eyes and contacts

Z 62 0 06

Order-No.	mm	mm²	AWG	
33841	220	0,5-6	20-10	1

For processing of red, blue and yellow isolated cable eyes, pin-end cable connectors, contact pins, contact pin sleeves, circular pins, circular pin sleeves, batch connectors and parallel connectors according to DIN 46234.

INFOBOX:
Automatic crimp tool

- Process-safe hexagonal crimping prevents smaller wire-end sleeves from snagging.
- These crimping pliers can handle all standard applications with a crimping range between 0.08 and 16 mm².
- Suitable for both single wire-end sleeves and twin wire-end sleeves thanks to automatic crimping.

Which drives are used for each individual product? Page 338

Crimp tool

for non-insulated cable eye with closed sleeve

Z 62 0 06

Order-No.	mm	mm²	AWG	
33843	220	0,1-16	26-6	1

For processing of non-isolated contact pins and contact pin sleeves according to DIN 46247 for standardised, solderless electrical connections.

Shear for electricians

with crimp function in blister pack

Z 71 7 06

Order-No.	mm	mm²	
41923	160	50	5

Crimp tool

for non-insulated male blade connectors

Z 62 0 06

Order-No.	mm	mm²	AWG	
33842	220	0,25-6	24-10	1

For processing of non-isolated contact pins and contact pin sleeves according to DIN 46247 for standardised, solderless electrical connections.

Craftsman's cutters

Standard model made of stainless steel

Z 71 5 06

Order-No.	mm	"	
29420	145	5 ¾	5

Pliers set Classic

High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs.

Z 99 0 002 01

Order-No.	
26853	1
	High-leverage combination pliers Classic with DynamicJoint® and OptiGrip with extra long cutting edge 200mm, 8" (26712)
	Heavy-duty diagonal cutters Classic with DynamicJoint® 180mm, 7" (41261)
	Water pump pliers QuickFix Classic automatic 250mm, 10" (39091)

Pliers set Professional

High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs.

Z 99 0 002 05

Order-No.	
26854	1
	High-leverage combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 200mm, 8" (26713)
	Heavy-duty diagonal cutters Professional with DynamicJoint® with switchable opening spring 180mm, 7" (41273)
	Water pump pliers QuickFix Professional automatic automatic 250mm, 10" (39093)

Pliers set Classic

Combination pliers, needle nose pliers, diagonal cutters 3-pcs.

Z 99 0 001 01

Order-No.	
26850	1
	Combination pliers Classic with DynamicJoint® and OptiGrip with extra long cutting edge 180mm, 7" (26706)
	Diagonal cutters Classic with DynamicJoint® 160 x 6 1/2" (43332)
	Classic needle nose pliers with cutting edge straight shape 160mm, 6 ½" (26718)

INFOBOX:
MagicTips®

Safety Hold

Wiha MagicTips® – Top of their class.

- Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.
- Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.
- Precise: Precision tips of high performance steel for maximum grip and high stability.

Which drives are used for each individual product? Page 338

Pliers set Classic with MagicTips®

Safety Hold

Circlip pliers 4-pcs.

Z 99 0 007 01

Order-No.	
34708	1

Supplying / holding

- Circlip pliers Classic with MagicTips® For inner rings (drill holes) J 1, 140mm (34689) / J 2, 180mm (34690)
- Circlip pliers Classic with MagicTips® For outer rings (shafts) A 1, 140mm (34699) / A 2, 185mm (34700)

• with safety latching function

Pliers set Classic

Circlip pliers 4-pcs.

Z 99 0 004 01

Order-No.	
26793	1

- Classic circlip pliers For inner rings (drill holes) J 1, 140mm (26782) / J 2, 180mm (26783)
- Classic circlip pliers For outer rings (shafts) A 1, 140mm (26790) / A 2, 180mm (26791)

Professional BiCut® high-performance diagonal cutters with DynamicJoint®

reddot award 2014 winner

+20% Power | 2 IN 1 | 200% Power

Switchable

Z 18 0 05

Order-No.	mm			Ø mm	SB	
38190	200	8	21	3		5
38983	200	8	21	3	x	1

Based on DIN ISO 5749.

High-performance diagonal cutters BiCut® Industrial with DynamicJoint®

reddot award 2014 winner

+20% Power | 2 IN 1 | 200% Power

Switchable

Z 18 0 02

Order-No.	mm			Ø mm	SB	
38189	200	8	21	3		5
38982	200	8	21	3	x	5

Based on DIN ISO 5749.

INFOBOX:

Professional pliers Industrial pliers

Professional **Industrial**

- Professional: pliers, chrome-plated
- Industrial: pliers, polished/black oxidised

BiCut® Classic high-performance diagonal cutters with DynamicJoint®

reddot award 2014 winner

Switchable

Z 18 0 01

Order-No.	mm	"		Ø mm	SB	
38060	200	8	21	3		5
38981	200	8	21	3	x	5

Based on DIN ISO 5749.

Industrial diagonal cutters with DynamicJoint®

Z12102

Order-No.	mm	"		Ø mm	SB	
43324	140	5 1/2"	16	1,6		5
43451	140	5 1/2"	16	1,6	x	5
43333	160	6 1/2"	17	2		5
43456	160	6 1/2"	17	2	x	5
43338	180	7"	18	2,8		5
43461	180	7"	18	2,8	x	5

Professional diagonal cutters with DynamicJoint®

Z12105

Order-No.	mm	"		Ø mm	SB	
43325	140	5 1/2"	16	1,6		5
43334	160	6 1/2"	17	2		5
43457	160	6 1/2"	17	2	x	5
43339	180	7"	18	2,8		5

Diagonal cutters Classic with DynamicJoint®

Z12101

Order-No.	mm	"		Ø mm	SB	
43304	140	5 1/2"	16	1,6		5
43450	140	5 1/2"	16	1,6	x	5
43332	160	6 1/2"	17	2		5
43455	160	6 1/2"	17	2	x	5
43337	180	7"	18	2,8		5
43460	180	7"	18	2,8	x	5

Which drives are used for each individual product? Page 338

Heavy-duty diagonal cutters Professional with DynamicJoint®

+40% Power

with switchable opening spring

Z 16 3 05

Order-No.	mm			Ø mm	SB	
40920	160	6,5	17	2		5
41273	180	7	18	2,3		5
41318	180	7	18	2,3	x	5
41278	200	8	19	2,5		5

Heavy-duty diagonal cutters Classic with DynamicJoint®

+40% Power

Z 16 2 01

Order-No.	mm			Ø mm	SB	
40913	160	6,5	17	2		5
41301	160	6,5	17	2	x	5
41261	180	7	18	2,3		5
41311	180	7	18	2,3	x	5
41266	200	8	19	2,5		5
41321	200	8	19	2,5	x	5

Heavy-duty diagonal cutters Industrial with DynamicJoint®

+40% Power

with switchable opening spring

Z 16 3 02

Order-No.	mm			Ø mm	SB	
40919	160	6,5	17	2		5
41307	160	6,5	17	2	x	5
41272	180	7	18	2,3		5
41317	180	7	18	2,3	x	5
41277	200	8	19	2,5		5
41327	200	8	19	2,5	x	5

INFOBOX:

Heavy-duty diagonal cutters

with switchable opening spring

- Up to 40% more cutting force thanks to optimised leverage.
- Opening spring with on/off function for fatigue-free work.
- Opening spring can be activated with just one hand.

Combination pliers Professional with DynamicJoint® and OptiGrip

with extra long cutting edge — Z 01 0 05

Order-No.	mm	"		Ø mm	SB	
26704	160	6 ½	16	1.6		5
27327	160	6 ½	16	1.6	x	5
26707	180	7	16	1.8		5
27399	180	7	16	1.8	x	5
26710	200	8	17	2		5

DIN ISO 5746.

Combination pliers Industrial with DynamicJoint® and OptiGrip

with extra long cutting edge — Z 01 0 02

Order-No.	mm	"		Ø mm	SB	
30979	160	6 ½	16	1.6		5
34565	160	6 ½	16	1.6	x	5
30826	180	7	16	1.8		5
34307	180	7	16	1.8	x	5
30978	200	8	17	2		5
34308	200	8	17	2	x	5

DIN ISO 5746.

INFOBOX:
DynamicJoint®

Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

INFOBOX:
OptiGrip

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Which drives are used for each individual product? Page 338

Combination pliers Classic with DynamicJoint® and OptiGrip

with extra long cutting edge **Z 01 0 01**

Order-No.	mm			Ø mm	SB	
26703	160	6 ½	16	1.6		5
27325	160	6 ½	16	1.6	x	5
26706	180	7	16	1.8		5
27336	180	7	16	1.8	x	5
26709	200	8	17	2		5
27337	200	8	17	2	x	5

DIN ISO 5746.

High-leverage combination pliers Industrial with DynamicJoint® and OptiGrip

with extra long cutting edge **Z 02 0 02**

Order-No.	mm			Ø mm	SB	
32319	200	8	18	2.3		5
32320	225	9	19	2.5		5
34567	225	9	19	2.5	x	5

DIN ISO 5746.

High-leverage combination pliers Professional with DynamicJoint® and OptiGrip



with extra long cutting edge **Z 02 0 05**

Order-No.	mm			Ø mm	SB	
26713	200	8	18	2.3		5
26716	225	9	19	2.5		5

DIN ISO 5746.

High-leverage combination pliers Classic with DynamicJoint® and OptiGrip

with extra long cutting edge **Z 02 0 01**

Order-No.	mm			Ø mm	SB	
26712	200	8	18	2.3		5
26715	225	9	19	2.5		5

DIN ISO 5746.

Needle-nose pliers Professional

with cutting edge straight shape — **Z 05 0 05**

Order-No.	mm			Ø mm	SB	
26719	160	6 ½	16	1.2		5
26722	200	8	17	1.6		5

DIN ISO 5745.

Needle-nose pliers Professional

with cutting edge curved shape, approx. 40° — **Z 05 1 05**

Order-No.	mm			Ø mm	SB	
26724	160	6 ½	16	1.2		5
26726	200	8	17	1.6		5

DIN ISO 5745.

Industrial needle nose pliers

with cutting edge straight shape — **Z 05 0 02**

Order-No.	mm			Ø mm	SB	
32322	160	6 ½	16	1.2		5
34309	160	6 ½	16	1.2	x	5
32323	200	8	17	1.6		5
34515	200	8	17	1.6	x	5

DIN ISO 5745.

Industrial needle nose pliers

with cutting edge curved shape, approx. 40° — **Z 05 1 02**

Order-No.	mm			Ø mm	SB	
32324	160	6 ½	16	1.2		5
34569	160	6 ½	16	1.2	x	5
32328	200	8	17	1.6		5
34570	200	8	17	1.6	x	5

DIN ISO 5745.

Classic needle nose pliers

with cutting edge straight shape — **Z 05 0 01**

Order-No.	mm			Ø mm	SB	
26718	160	6 ½	16	1.2		5
27340	160	6 ½	16	1.2	x	5
26721	200	8	17	1.6		5
27341	200	8	17	1.6	x	5

DIN ISO 5745.

Classic needle nose pliers

with cutting edge curved shape, approx. 40° — **Z 05 1 01**

Order-No.	mm			Ø mm	SB	
26723	160	6 ½	16	1.2		5
27342	160	6 ½	16	1.2	x	5
26725	200	8	17	1.6		5
27343	200	8	17	1.6	x	5

DIN ISO 5745.

Which drives are used for each individual product? Page 338

Plastic diagonal cutters Classic

with opening spring without bevelled edge **Z 15 0 01**

Order-No.	mm			
37402	125	5	2	5
37403	160	6 ½	3	5

DIN ISO 5743.

Long flat-nose pliers Professional

Z 07 0 05

Order-No.	mm		SB	
26731	160	6 ½		5

DIN ISO 5745.

Classic precision mechanic's needle nose pliers

with cutting edge and opening spring in straight shape **Z 36 0 01**

Order-No.	mm			Ø mm	
36483	160	6½	10	2	5

DIN ISO 5745.

Long flat-nose pliers Industrial

Z 07 0 02

Order-No.	mm		SB	
32330	160	6 ½		5
34310	160	6 ½	x	5

DIN ISO 5745.

Precision mechanic's diagonal cutters Classic

with opening spring **Z 44 3 01**

Order-No.	mm			Ø mm	SB	
36189	125	5	7	0.8		5
43240	125	5	7	0,8	x	5

DIN ISO 5749.

Long flat-nose pliers Classic

Z 07 0 01

Order-No.	mm		SB	
26730	160	6 ½		5
27344	160	6 ½	x	5

DIN ISO 5745.

Long round-nose pliers Professional

Z 09 0 05

Order-No.	mm		SB	
26734	160	6 ½		5

DIN ISO 5745.

Long round-nose pliers Classic

Z 09 0 01

Order-No.	mm		SB	
26733	160	6 ½		5
27345	160	6 ½	x	5

DIN ISO 5745.

Long round-nose pliers Industrial

Z 09 0 02

Order-No.	mm		SB	
32332	160	6 ½		5
34568	160	6 ½	x	5

DIN ISO 5745.

Pliers wrench Classic

Z 25 0 01

Order-No.	mm			
40923	250	10	46	6

INFOBOX:
Plier wrench

- Required width setting directly on the work piece with no need to press any buttons
- Ratchet principle allows users to fasten screws rapidly with a simple glide.
- Thanks to its slim design and button-free setting, it is ideal for use in tight spaces.
- Smooth, parallel-acting jaws prevent damage on sensitive surfaces.

Which drives are used for each individual product? Page 338

Water pump pliers Professional

box type — Z 21 0 05

Order-No.	mm				SB	
26762	250	10	2	50		5

DIN ISO 8976.

Water pump pliers Professional

with push button — Z 22 0 05

Order-No.	mm				SB	
26766	250	10	2	50		5

DIN ISO 8976.

Water pump pliers Industrial

box type — Z 21 0 02

Order-No.	mm				SB	
36038	180	7	1	30		5
36985	180	7	1	30	x	5
32342	250	10	2	50		5
34312	250	10	2	50	x	5
36039	300	12	2 ½	63		5
36986	300	12	2 ½	63	x	5

DIN ISO 8976.

Water pump pliers Industrial

with push button — Z 22 0 02

Order-No.	mm				SB	
36040	180	7	1	30		5
36987	180	7	1	30	x	1
32352	250	10	2	50		5
34518	250	10	2	50	x	5
36041	300	12	2 ½	63		5
36988	300	12	2 ½	63	x	5

DIN ISO 8976.

Water pump pliers Classic

box type — Z 21 0 01

Order-No.	mm				SB	
26760	180	7	1	30		5
27350	180	7	1	30	x	5
26761	250	10	2	50		5
27381	250	10	2	50	x	5
26763	300	12	2 ½	63		5
27382	300	12	2 ½	63	x	5

DIN ISO 8976.

Water pump pliers Classic

with push button — Z 22 0 01

Order-No.	mm				SB	
26764	180	7	1	30		5
27351	180	7	1	30	x	5
26765	250	10	2	50		5
27383	250	10	2	50	x	5
26767	300	12	2 ½	63		5
27384	300	12	2 ½	63	x	5

DIN ISO 8976.

Water pump pliers QuickFix Professional automatic

automatic

Z 23 1 05

Order-No.	mm				SB	
39093	250	10	1 ½	40		1
39095	250	10	1 ½	40	x	5

DIN ISO 8976.

Heavy-duty end cutting nippers Classic

Z 17 0 01

Order-No.	mm			Ø mm	SB	
26757	160	6 ½	16	1.6		5
27372	160	6 ½	16	1.6	x	5
26758	180	7	17	1.8		5
27373	180	7	17	1.8	x	5
26759	200	8	18	2		5
27374	200	8	18	2	x	5

DIN ISO 5748.

Water pump pliers QuickFix Classic

automatic

Z 23 1 01

Order-No.	mm				SB	
39091	250	10	1 ½	40		1
39094	250	10	1 ½	40	x	5

Pincers Classic

Z 30 0 01

Order-No.	mm			Ø mm	SB	
26771	180	7	12	2		5
27375	180	7	12	2	x	5
26772	200	8	13	2.2		5
27376	200	8	13	2.2	x	5

DIN ISO 9243.

Which drives are used for each individual product? Page 338

Monier pliers Classic

Z 31 0 01

Order-No.	mm	"		Ø mm	SB	
26774	220	8 ¾	16	1.6		5
27377	220	8 ¾	16	1.6	x	5
26776	250	10	17	1.8		5
27378	250	10	17	1.8	x	5
26778	280	11	18	2		5
27379	280	11	18	2	x	5
26780	300	12	18	2		5
27380	300	12	18	2	x	5

DIN ISO 9242.

Heavy-duty Classic Monier pliers

Z 32 0 01

Order-No.	mm	"		Ø mm	SB	
40712	300	12	19	2.3		5
41220	300	12	19	2.3	x	5

DIN ISO 8976.

Monier pliers Classic

without handle cover

Z 31 0 00

Order-No.	mm	"		Ø mm	SB	
26773	220	8 ¾	16	1.6		5
27501	220	8 ¾	16	1.6	x	5
26775	250	10	17	1.8		5
27502	250	10	17	1.8	x	5
26777	280	11	18	2		5
27503	280	11	18	2	x	5
26779	300	12	18	2		5
27504	300	12	18	2	x	5

DIN ISO 9242.

Heavy-duty Classic Plus Monier pliers

without handle cover

Z 32 0 10

Order-No.	mm	"		Ø mm	SB	
40713	300	12	19	2.3		5
41221	300	12	19	2.3	x	5

Classic circlip pliers with MagicTips®, straight

For inner rings (drill holes)

Z 33 4 01

Order-No.	Typ	mm	ⅡⅡ		SB	
34688	J 0	140	5 ½	8-13		5
36975	J 0	140	5 ½	8-13	x	5
34689	J 1	140	5 ½	12-25		5
36225	J 1	140	5 ½	12-25	x	5
34690	J 2•	180	7	19-60		5
36222	J 2•	180	7	19-60	x	5
34691	J 3•	220	9	40-100		5
36272	J 3•	220	9	40-100	x	5
34692	J 4•	305	12	85-140		5

• with safety latching function DIN ISO 5256.

Classic circlip pliers with MagicTips®, angled

For inner rings (drill holes)

Z 33 5 01

Order-No.	Typ	mm	ⅡⅡ		SB	
34693	J 01	140	5 ½	8-13		5
36976	J 01	140	5 ½	8-13	x	5
34694	J 11	140	5 ½	12-25		5
36223	J 11	140	5 ½	12-25	x	5
34695	J 21•	180	7	19-60		5
36224	J 21•	180	7	19-60	x	5
34696	J 31•	220	9	40-100		5
36226	J 31•	220	9	40-100	x	5
34697	J 41•	305	12	85-140		5

• with safety latching function DIN ISO 5256.

Classic circlip pliers with MagicTips®, straight

For outer rings (shafts)

Z 34 4 01

Order-No.	Typ	mm	ⅡⅡ		SB	
34698	A 0	140	5 ½	7-10		5
36977	A 0	140	5 ½	7-10	x	5
34699	A 1	140	5 ½	10-25		5
36978	A 1	140	5 ½	10-25	x	5
34700	A 2•	185	7	19-60		5
36220	A 2•	185	7	19-60	x	5
34701	A 3•	240	9	40-100		5
36219	A 3•	240	9	40-100	x	5
34702	A 4•	300	12	85-140		5

• with safety latching function DIN ISO 5254.

Classic circlip pliers with MagicTips®, angled

For outer rings (shafts)

Z 34 5 01

Order-No.	Typ	mm	ⅡⅡ		SB	
34703	A 01	140	5 ½	7-10		5
36979	A 01	140	5 ½	7-10	x	5
34704	A 11	140	5 ½	10-25		5
36980	A 11	140	5 ½	10-25	x	1
34705	A 21•	185	7	19-60		5
36218	A 21•	185	7	19-60	x	1
34706	A 31•	240	9	40-100		5
36221	A 31•	240	9	40-100	x	5
34707	A 41•	300	12	85-140		5

• with safety latching function DIN ISO 5254.

Classic circlip pliers, straight

For inner rings (drill holes)

Z 33 0 01

Order-No.	Typ	mm	″		
26781	J 0	139	5 ½	8-13	5
26782	J 1	140	5 ½	12-25	5
26783	J 2	180	7	19-60	5
26784	J 3	225	9	40-100	5
29425	J 4	310	12	85-140	5

DIN ISO 5256.

Classic circlip pliers, angled

For inner rings (drill holes)

Z 33 1 01

Order-No.	Typ	mm	″		
26785	J 01	139	5 ½	8-13	5
26786	J 11	140	5 ½	12-25	5
26787	J 21	180	7	19-60	5
26788	J 31	225	9	40-100	5
29427	J 41	310	12	85-140	5

DIN ISO 5256.

Classic circlip pliers, straight

For outer rings (shafts)

Z 34 0 01

Order-No.	Typ	mm	″		
26789	A 0	139	5 ½	3-10	5
26790	A 1	140	5 ½	10-25	5
26791	A 2	180	7	19-60	5
26792	A 3	225	9	40-100	5
29428	A 4	310	12	85-140	5

DIN ISO 5254.

Classic circlip pliers, angled

For outer rings (shafts)

Z 34 1 01

Order-No.	Typ	mm	″		
26794	A 01	139	5 ½	3-10	5
26795	A 11	140	5 ½	10-25	5
26796	A 21	180	7	19-60	5
26797	A 31	225	9	40-100	5
29429	A 41	310	12	85-140	5

DIN ISO 5254.

INFOBOX:
MagicTips®

Safety Hold

Wiha MagicTips® – Top of their class.

- Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.
- Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.
- Precise: Precision tips of high performance steel for maximum grip and high stability.

Corner pipe pliers Classic

S-mouth

Z 26 0 00

Order-No.	mm			
29435	320	1	0-40	1
29436	420	1 ½	0-55	1
29437	535	2	0-67	1

DIN 5234.

Corner pipe pliers Classic

90°

Z 26 2 00

Order-No.	mm			
29441	320	1	0-40	1
29442	415	1 ½	0-55	1
29443	555	2	0-67	1

DIN 5234.

Professional revolving punch pliers

Z 65 0 05

Order-No.	mm		Ø	
28402	225	9	2,0-4,5	5

Revolving punch and loop pliers Professional

Z 65 2 05

Order-No.	mm		Ø	
29550	225	9	4,0-5,0	5

Which drives are used for each individual product? Page 338

Gripping pliers Classic

with wire cutter

Z 66 0 00

Order-No.	mm				
29485	180	7	8-30	0-20	5
29486	250	10	8-40	0-20	5
29487	300	12	8-65	0-30	5

Bolt cutter Classic

Z 27 0 01

Order-No.	mm			Ø mm	
39374	450	18	6	6	1
39376	600	24	7	8	1
39378	750	30	8	9	1
39380	900	36	9	11	1

Replacement cutter head

for bolt cutter Classic

Z 27 0 01K

Order-No.		Ø mm	
39375	6	6	1
39377	7	8	1
39379	8	9	1
39381	9	11	1

Pliers set Professional ESD

Diagonal cutters, oblique end cutting nippers, needle nose pliers, 4-pcs. in tool pouch

Z 99 0 001 04

Order-No.		
33507		1
	Diagonal cutters Professional ESD wide, pointed head without bevelled edge 115mm, 4 ½" (26821)	
	Diagonal cutters Professional ESD wide, semi-rounded head with bevelled edge 115mm, 4 ½" (26831)	
	Oblique end cutting nippers Professional ESD wide head, approx. 29° with small bevelled edge 115mm, 4 ½" (26835)	
	Needle nose pliers Professional ESD straight 120mm, 4 ¾" (26799)	

SMD tweezer set Professional ESD

Mixed 4-pcs. in box

ZP 99 0 140 02

Order-No.		
32349		1
	Universal tweezers Professional ESD Type AA 130mm, AA (32318)	
	Precision tweezers Professional ESD Type PSF 130mm, PSF (32325)	
	SMD tweezers Professional ESD Type 13 120mm, 13 (32340)	
	SMD tweezers Professional ESD Type 59 117mm, 59 (32344)	

INFOBOX:

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 -10^9 Ohm.

Which drives are used for each individual product? Page 338

Diagonal cutters Professional ESD

narrow, pointed head with bevelled edge Z 40 1 04

Order-No.	mm			Ø mm	SB	
26808	115	4 ½	7	0.6		5
27442	115	4 ½	7	0.6	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, pointed head with bevelled edge Z 41 1 04

Order-No.	mm			Ø mm	SB	
26816	115	4 ½	7	1		5
27444	115	4 ½	7	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

narrow, pointed head without bevelled edge Z 40 3 04

Order-No.	mm			Ø mm	
33521	115	4 ½	2	1	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, pointed head without bevelled edge Z 41 3 04

Order-No.	mm			Ø mm	SB	
26821	115	4 ½	2	1		5
27445	115	4 ½	2	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

narrow, pointed head with small bevelled edge Z 40 4 04

Order-No.	mm			Ø mm	SB	
26814	115	4 ½	2	1		5
27443	115	4 ½	2	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, pointed head and wire trapping spring with small bevelled edge Z 41 4 04

Order-No.	mm			Ø mm	SB	
26822	115	4 ½	2	1.2		5
27446	115	4 ½	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

narrow, semi-rounded head with small bevelled edge

Z 43 1 04

Order-No.	mm	ⅡⅡ	✂	Ø mm	SB	
26826	115	4 ½	2	1.2		5
27447	115	4 ½	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Oblique end cutting nippers Professional ESD

wide head, approx. 29° with small bevelled edge

Z 46 1 04

Order-No.	mm	ⅡⅡ	✂	Ø mm	SB	
26835	115	4 ½	2	1.2		5
27450	115	4 ½	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, semi-rounded head with bevelled edge

Z 44 1 04

Order-No.	mm	ⅡⅡ	✂	Ø mm	SB	
26831	115	4 ½	7	1		5
27448	115	4 ½	7	1	x	5

DIN ISO 9654. IEC 61340-5-1.

End cutting nippers Professional ESD

narrow head with small bevelled edge

Z 47 1 04

Order-No.	mm	ⅡⅡ	✂	Ø mm	SB	
26839	110	4 ¼	2	0.6		5
27452	110	4 ¼	2	0.6	x	5

DIN ISO 9654. IEC 61340-5-1.

Diagonal cutters Professional ESD

wide, semi-rounded head with small bevelled edge

Z 44 3 04

Order-No.	mm	ⅡⅡ	✂	Ø mm	SB	
26832	115	4 ½	2	1.2		5
27449	115	4 ½	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

End cutting nippers Professional ESD

wide head with small bevelled edge

Z 47 2 04

Order-No.	mm	ⅡⅡ	✂	Ø mm	SB	
26840	115	4 ½	2	1.4		5
27453	115	4 ½	2	1.4	x	5

DIN ISO 9654. IEC 61340-5-1.

Which drives are used for each individual product? Page 338

Needle nose pliers Professional ESD

straight

Z 36 0 04

Order-No.	mm	ⅡⅡ	A	B	D	F	
26799	120	4 ¾	9,5	23	6,5	1,4	5
27329	120	4 ¾	9,5	23	6,5	1,4	5
27905	145	5 ¾	12,0	40	7,5	2,0	5

DIN ISO 9655. IEC 61340-5-1.

Flat-nose pliers Professional ESD

Short, flat jaws

Z 38 0 04

Order-No.	mm	ⅡⅡ	SB	
26806	120	4 ¾		5
27441	120	4 ¾	x	5

DIN ISO 9655. IEC 61340-5-1.

Needle nose pliers Professional ESD

curved form, approx. 45°

Z 36 1 04

Order-No.	mm	ⅡⅡ	SB	
26802	120	4 ¾		5
27439	120	4 ¾	x	5

DIN ISO 9655. IEC 61340-5-1.

Round-nose pliers Professional ESD

Short, rounded jaws

Z 37 0 04

Order-No.	mm	ⅡⅡ	SB	
26804	120	4 ¾		5
27440	120	4 ¾	x	5

DIN ISO 9655. IEC 61340-5-1.

Universal tweezers Professional ESD

Type AA

ZP 01 0 14

Order-No.	mm	Typ	
32318	130	AA	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 00

ZP 11 0 14

Order-No.	mm	Typ	
32327	120	00	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type GG

ZP 06 0 14

Order-No.	mm	Typ	
32347	130	GG	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 2a

ZP 15 0 14

Order-No.	mm	Typ	
32329	120	2a	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type PSF

ZP 07 1 14

Order-No.	mm	Typ	
32325	130	PSF	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 3c

ZP 16 0 14

Order-No.	mm	Typ	
32346	110	3c	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type SS

ZP 09 0 14

Order-No.	mm	Typ	
32326	135	SS	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 5

ZP 18 0 14

Order-No.	mm	Typ	
32334	110	5	10

IEC 61340-5-1.

Which drives are used for each individual product? Page 338

Precision tweezers Professional ESD

Type 7a

ZP 20 1 14

Order-No.	mm	Typ	
32335	120	7a	10

IEC 61340-5-1.

Precision tweezers Professional ESD

Type 7abb

ZP 20 2 14

Order-No.	mm	Typ	
32336	120	7abb	10

IEC 61340-5-1.

SMD tweezers Professional ESD

Type 12

ZP 24 0 14

Order-No.	mm	Typ	
32338	120	12	10

IEC 61340-5-1.

SMD tweezers Professional ESD

Type 13

ZP 25 2 14

Order-No.	mm	Typ	
32340	120	13	10

IEC 61340-5-1.

Universal tweezers Professional ESD

Type 40

ZP 46 0 14

Order-No.	mm	Typ	
32343	145	40	10

IEC 61340-5-1.

SMD tweezers Professional ESD

Type 59

ZP 50 0 14

Order-No.	mm	Typ	
32344	117	59	10

IEC 61340-5-1.

Diagonal cutters Electronic

wide, pointed head without bevelled edge **Z 41 1 03**

Order-No.	mm	"		Ø mm	SB	
26818	130	5 ½	3	1.3		5
27391	130	5 ½	3	1.3	x	5

Diagonal cutters Electronic

very narrow, pointed head without bevelled edge **Z 40 0 03**

Order-No.	mm	"		Ø mm	SB	
26812	128	5 ⅛	2	0.8		5
27388	128	5 ⅛	2	0.8	x	5

Diagonal cutters Electronic

wide, pointed head with small bevelled edge **Z 41 3 03**

Order-No.	mm	"		Ø mm	SB	
26815	135	5 ⅓	8	0.8		5
27393	135	5 ⅓	8	0.8	x	5

DIN ISO 9654.

Diagonal cutters Electronic

narrow, pointed head and wire trapping spring without bevelled edge **Z 40 1 03**

Order-No.	mm	"		Ø mm	SB	
26813	126	5	2	1		5
27390	126	5	2	1	x	5

Diagonal cutters Electronic

wide, pointed head and wire trapping spring without bevelled edge **Z 41 6 03**

Order-No.	mm	"		Ø mm	SB	
26825	130	5 1/8	3	1.3		5
27395	130	5 1/8	3	1.3	x	5

Oblique cutting nippers Electronic

wide, pointed head without bevelled edge **Z 46 0 03**

Order-No.	mm	"		Ø mm	SB	
26833	130	5 ⅛	3	1.3		5
27398	130	5 ⅛	3	1.3	x	5

Which drives are used for each individual product? Page 338

Oblique end cutting nippers Electronic

very narrow, short head without bevelled edge Z 46 0 03

Order-No.	mm			Ø mm	SB	
26830	125	5	2	0.6		5
27397	125	5	2	0.6	x	5

Needle nose pliers Electronic

narrow, short head straight form Z 36 0 03

Order-No.	mm		SB	
26801	150	6		5
27326	150	6	x	5

Needle nose pliers Electronic

Narrow, long head, curved about 40° Z 36 1 03

Order-No.	mm		SB	
41015	142	5 ½		5
41222	142	5 ½	x	5

Stripping pliers Electronic

Stripping points 0.8-2.6 mm Z 49 2 03

Order-No.	mm		mm²	AWG	SB	
33471	165	6 ½	0,81-2,59	20-10		5
36794	165	6 ½	0,81-2,59	20-10	x	5

Stripping pliers Electronic

Stripping points 0.4-1.3 mm Z 49 7 03

Order-No.	mm		mm²	AWG	SB	
33472	165	6 ½	0,4-1,3	26-16		5
35820	165	6 ½	0,4-1,3	26-16	x	5

The cutting capacities for our pliers.

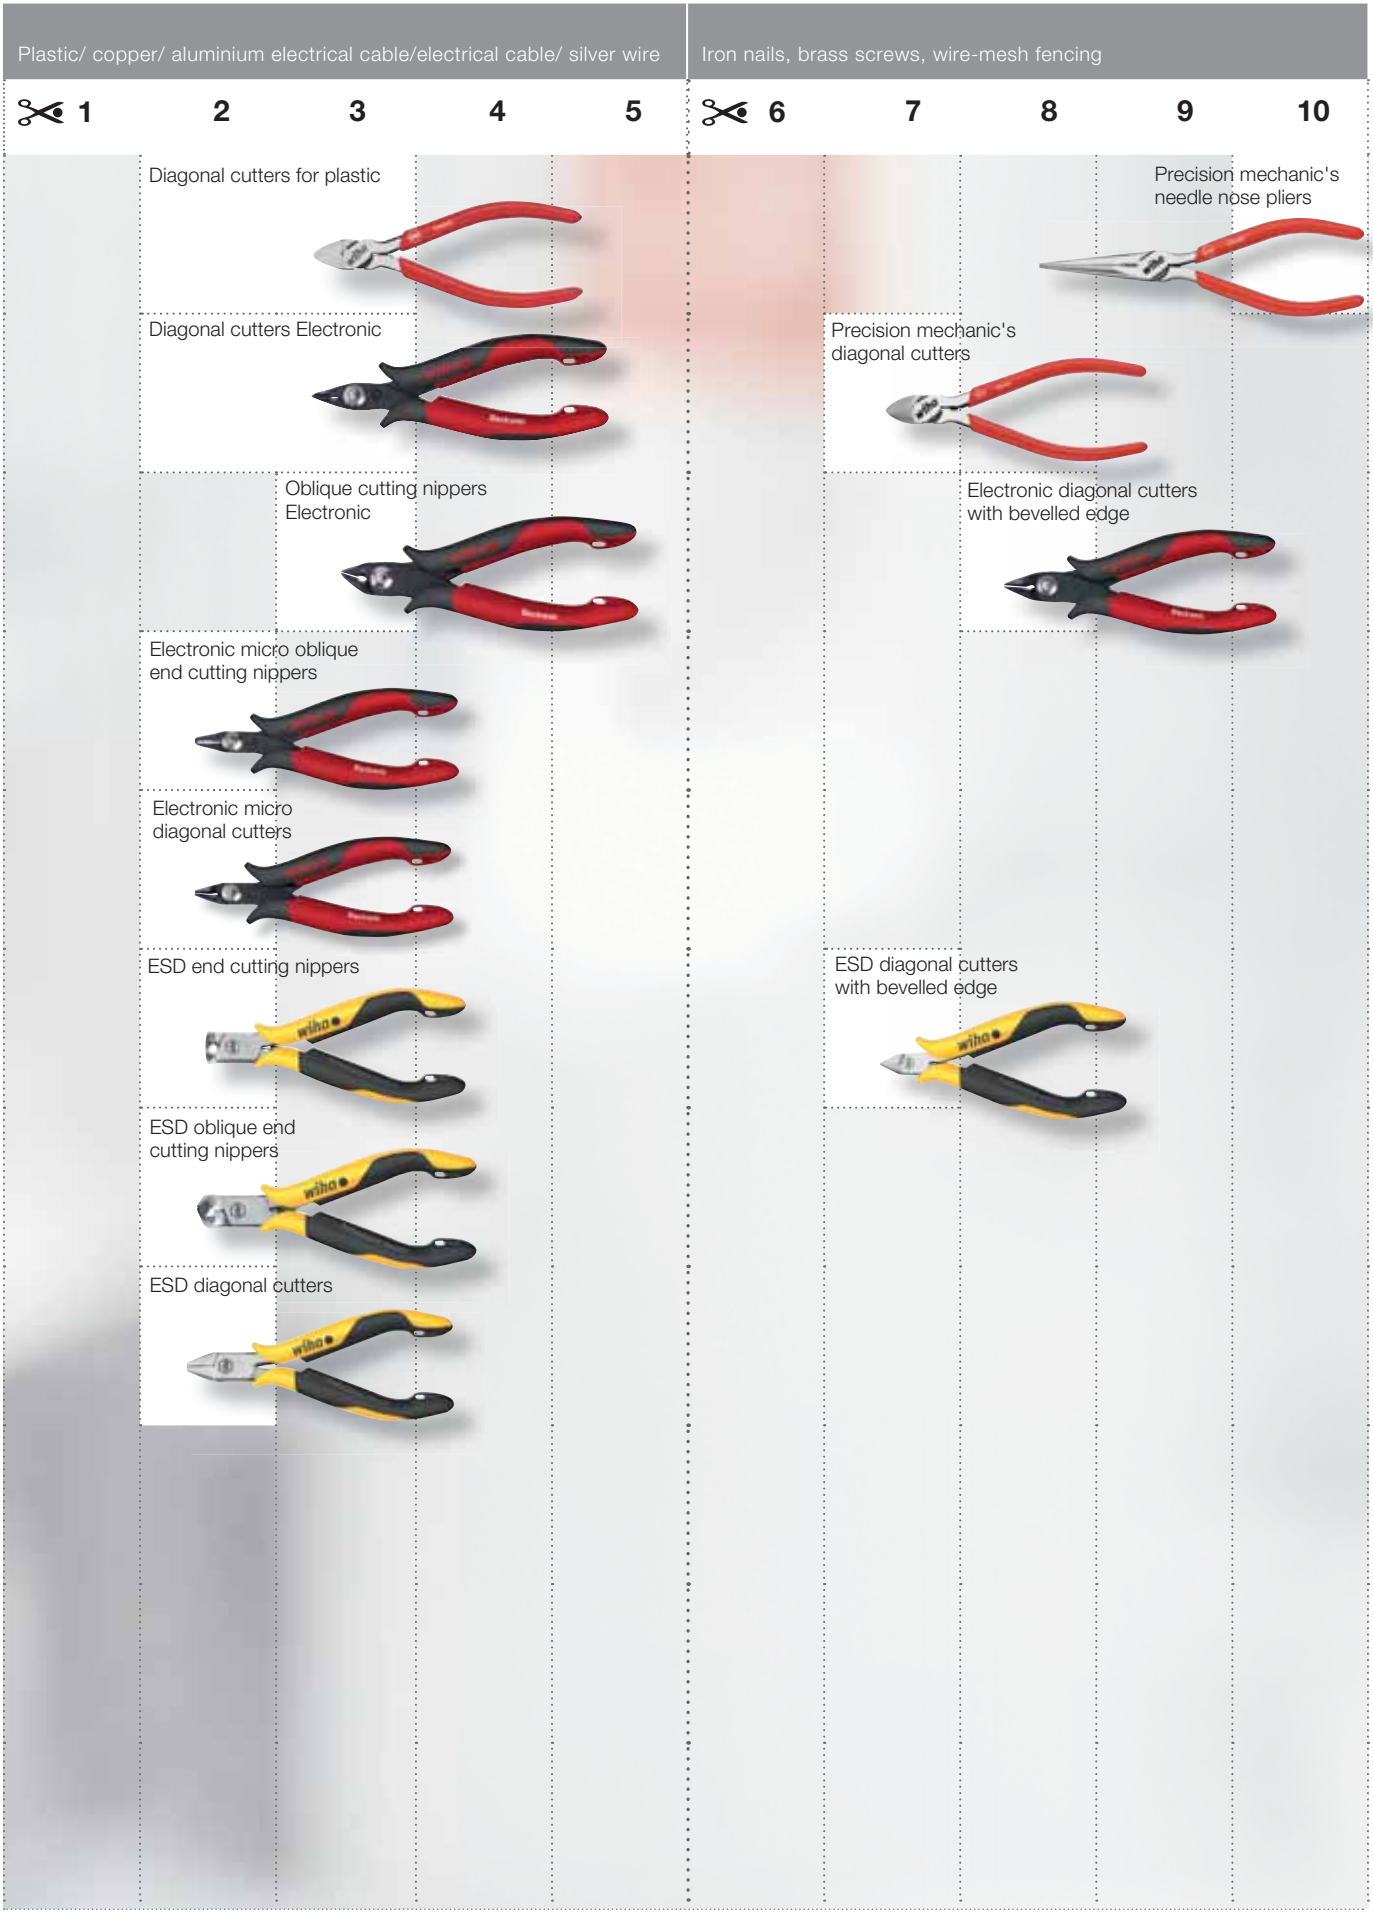

Cutting capacities for pliers are practice-based values for guidance

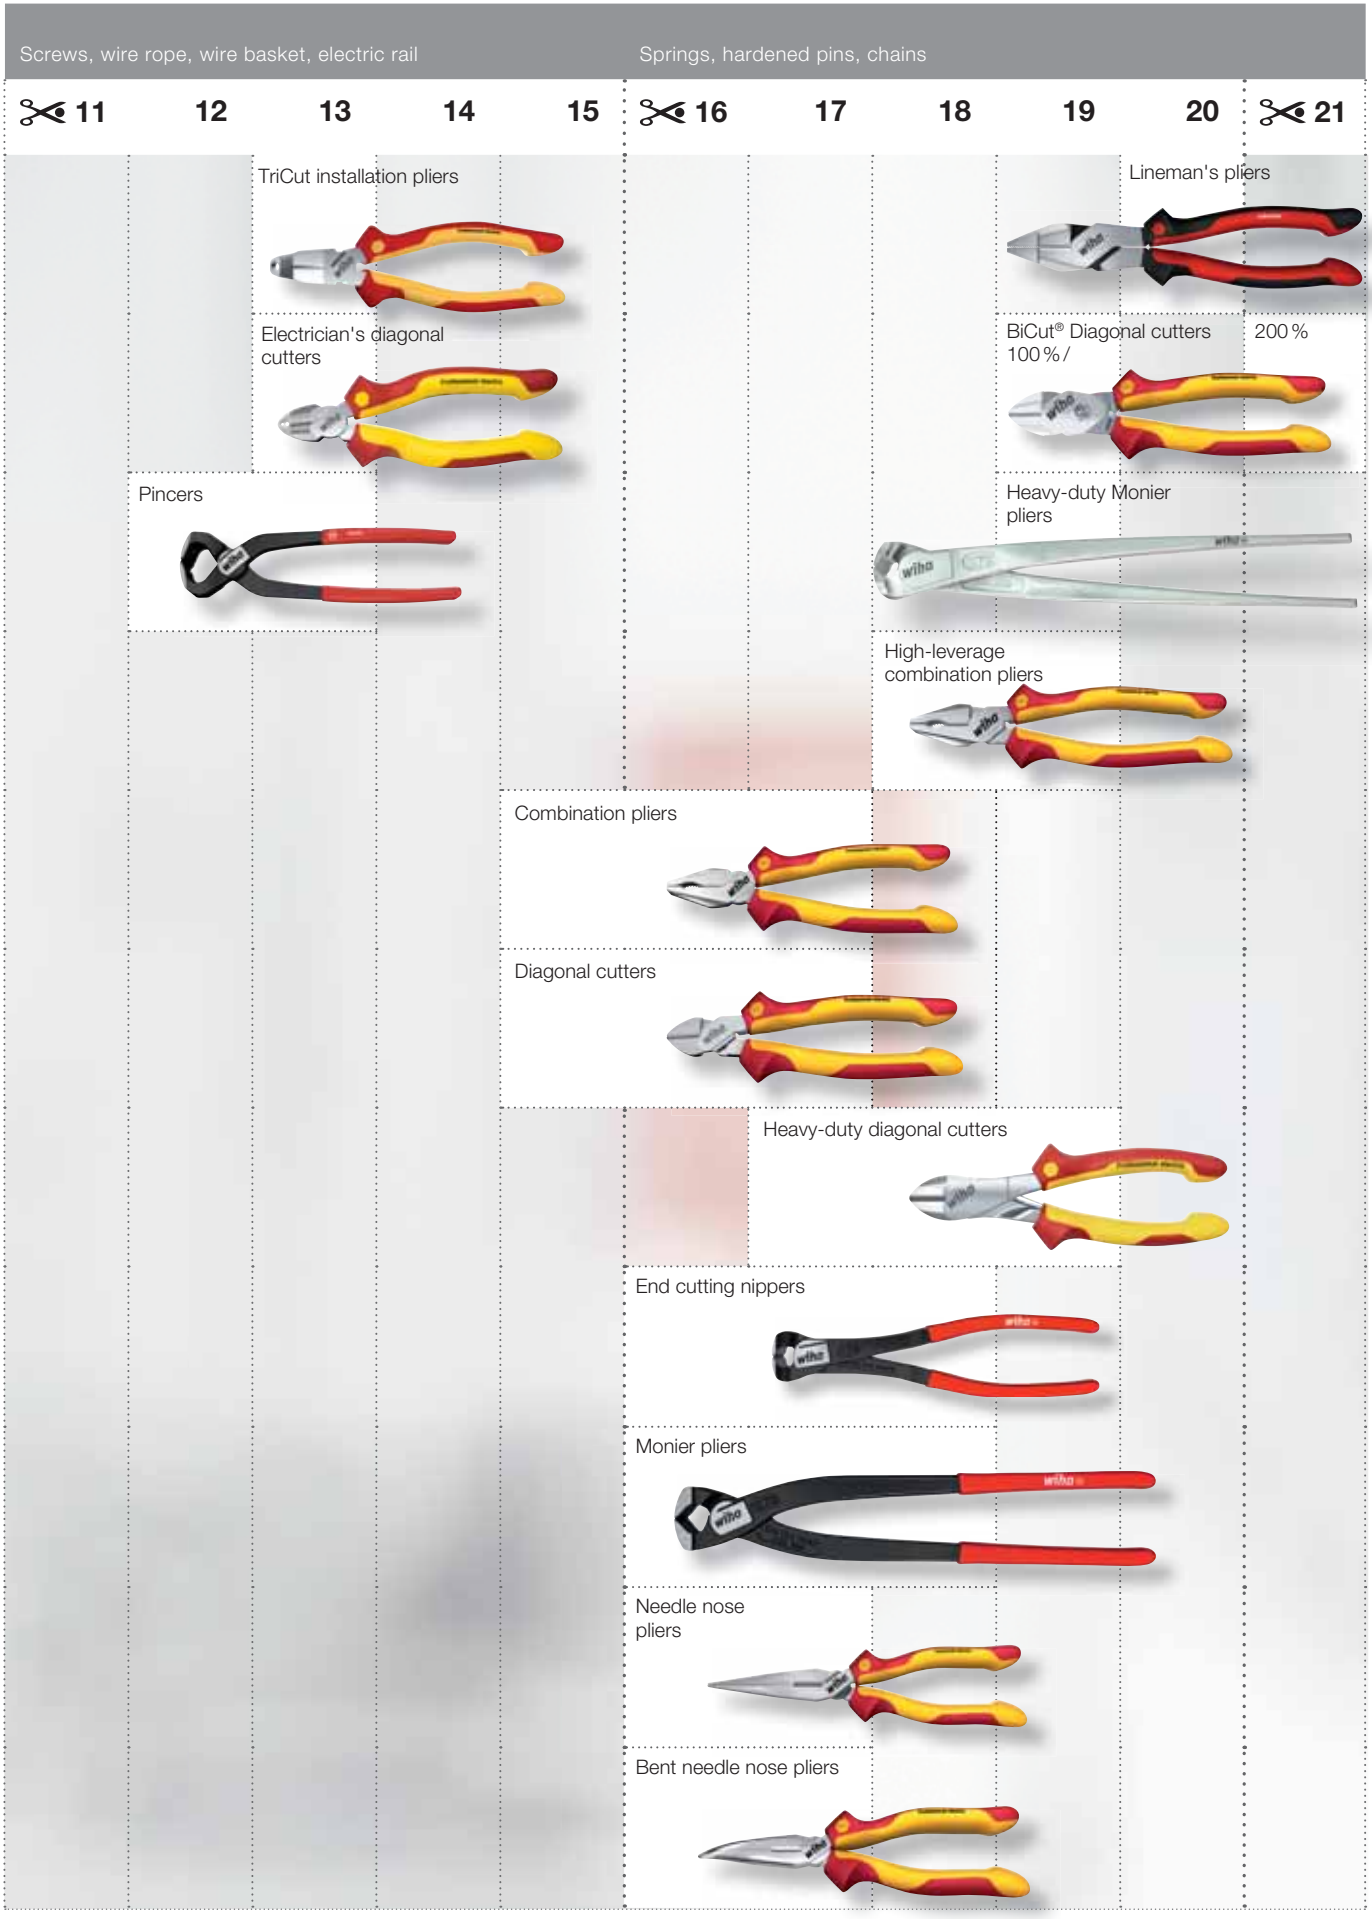

Values may vary depending on leverage, material thickness and the specific product application.

Striking and measuring tools.
Optimum force transmission

With optimally uniform weight distribution, the Wiha electric hammer strikes a perfect balance and is also eminently suitable for use in confined working environments. Removing nails and nail clamps as well as fixing cables and dowels into position without causing damage become extremely simple tasks. Wiha's scaled impact screwdriver blade ensures that the portable dowel racket makes a perfectly dimensioned dowel hole to the required depth anywhere at any time without making a mess, unlike power tools.

Wiha measuring tools prove to be further dependable helpers during electrical installation work. The Wiha electrician's spirit level allows users to easily mark spaces for up to four flush boxes. This spirit level stands out due to its effortless dimension measurement and perfectly visible bubbles.

Impact tools

Soft-faced hammer set Safety with assorted hammer faces, 8-pcs. in box
Page 328

Soft-faced hammer Safety soft/medium hard, with hickory wooden handle, round hammer face
Page 329

Soft-faced hammer dead-blow, medium hard with hickory wooden handle, round hammer face
Page 332

Soft-faced hammer dead-blow, medium hard With steel tube handle, round hammer face
Page 332

Electrician's hammer with 300 g hammer head, in blister pack
Page 334

SoftFinish® dowel racket set with dowels Phillips with 6 mm round blade in blister pack, 5-pcs.
Page 334

Measurement tools

Electrician's spirit level 40 cm
Page 335

Callipers digiMax digital Reading 0.01 mm
Page 335

Electrician's Longlife® folding ruler, 2 m metric, 10 segments
Page 336

Folding ruler LongLife Plus Composite 2 m metric, 10 segments
Page 336

with assorted hammer faces, 8-pcs. in box **832 B8**

Order-No.		
44008		1
	1 x Hammer face soft Round for soft-faced safety hammer	
	2 x Hammer face medium soft Round for soft-faced safety hammer	
	2 x Hammer face medium hard Round for soft-faced safety hammer	
	2 x Hammer face hard Round for soft-faced safety hammer	
	1 x Hammer face very hard Round for soft-faced safety hammer	
	1 x Hickory wooden handle for safety soft-faced hammer	
	1 x Hammer housing set with screw and locknut for Safety soft-faced hammer	
●	1 x L-keys Hexagonal ball end matt chrome-plated	

INFOBOX:

Colour code system for Wiha hammer faces

Safety note:

- Always wear safety glasses and safety gloves when working with soft-faced hammers. Please observe the applicable national standards and regulations.
- Please observe the following tightening torques when replacing heads or handles:

  Size 30 = 20 Nm
  Size 40 = 40 Nm
  Size 50 = 70 Nm
  Size 60 = 70 Nm
  Size 80 = 80 Nm

Hammer face	Application range
soft (blue)	for sensitive materials, such as those in furniture and interior construction, minor assembly. Material: elastomer.
medium soft (black)	for robust work, such as paving, tiling, dry wall installation. Material: rubber.
medium hard (yellow)	universal use, such as for tool and machine manufacture, car repairs, sheet metal and assembly work. Material: polyurethane.
hard (orange)	for high stress mechanical tasks such as assembly and dismantling work, building and construction work, repair work. Material: cellulose acetate.
very hard (white)	for high impact work, heavy industry and construction, mould construction, road construction, horticulture and landscaping. Material: polyamide.

You will find detailed instructions on replacing at www.wiha.com

Which drives are used for each individual product? Page 338

Soft-faced hammer Safety soft/medium soft

with hickory wooden handle, round hammer face **832-13**

Order-No.	●			g	
26649	30	87	290	289	5
26650	40	110	325	637	5
26651	50	131	360	1117	2
26652	60	150	400	1636	2

Soft-faced hammer Safety medium soft/medium hard

with hickory wooden handle, round hammer face **832-35**

Order-No.	●			g	
26434	30	87	290	295	5
26435	40	110	325	636	5
26436	50	131	360	1100	2
26437	60	150	400	1632	2

Soft-faced hammer Safety soft/medium hard

with hickory wooden handle, round hammer face **832-15**

Order-No.	●			g	
26653	30	87	290	272	5
26654	40	110	325	620	5
26655	50	131	360	1077	2
26656	60	150	400	1555	2

Soft-faced hammer Safety medium soft/hard

with hickory wooden handle, round hammer face **832-38**

Order-No.	●			g	
26611	30	87	290	306	5
26612	40	110	325	621	5
26613	50	131	360	1103	2
26614	60	150	400	1620	2

Soft-faced hammer Safety medium soft/medium soft

with hickory wooden handle, round hammer face **832-33**

Order-No.	●			g	
26509	30	87	290	302	5
26431	40	110	325	640	5
26432	50	131	360	1130	2
26433	60	150	400	1692	2
26439	80	185	490	3136	2

Soft-faced hammer Safety medium soft/very hard

with hickory wooden handle, round hammer face 832-39

Order-No.	●↕			g	
26657	30	87	290	314	5
26658	40	110	325	649	5
26659	50	131	360	1099	2
26660	60	150	400	1682	2
26582	80	185	490	3090	2
26661	80L•	185	840	3324	2

• Sledgehammer

Soft-faced hammer Safety medium hard/medium hard

with hickory wooden handle, round hammer face 832-55

Order-No.	●↕			g	
26640	30	87	290	296	5
26641	40	110	325	609	5
26642	50	131	360	1120	2
26643	60	150	400	1638	2

Soft-faced hammer Safety very hard/very hard

with hickory wooden handle, round hammer face 832-99

Order-No.	●↕			g	
26644	30	87	290	299	5
26645	40	110	325	602	5
26646	50	131	360	1128	2
26647	60	150	400	1637	2
26648	80	185	490	2940	2
26674	80L•	185	840	3284	2

• Sledgehammer

Hammer face soft

Round for soft-faced safety hammer 831-1

Order-No.	●↕	g	
26663	30	20.5	5
26664	40	44	5
26665	50	83.5	2
26666	60	136	2

You will find detailed instructions on replacing at www.wiha.com

Hammer face medium soft

Round for soft-faced safety hammer 831-3

Order-No.	●↕	g	
26422	30	30.6	5
26423	40	78	5
26424	50	129.5	2
26425	60	229	2
26426	80•	479	2

• Also for sledgehammers
You will find detailed instructions on replacing at www.wiha.com

Hammer face medium hard

Round for soft-faced safety hammer 831-5

Order-No.	●↕	g	
26427	30	28.2	5
26428	40	58.5	5
26429	50	117	2
26430	60	189	2

You will find detailed instructions on replacing at www.wiha.com

Which drives are used for each individual product? Page 338

Hammer face hard

Round for soft-faced safety hammer **831-8**

Order-No.	●↕	g	
26615	30	25.5	5
26616	40	53.5	5
26618	50	53	2
26620	60	182.5	2

You will find detailed instructions on replacing at www.wiha.com

Hammer housing set

with screw and locknut for Safety soft-faced hammer **829-0**

Order-No.	●↕	g	
26668	30	159	1
26669	40	375	1
26670	50	709	1
26671	60	1017	1
26672	80•	1894	1

• Also for sledgehammers
You will find detailed instructions on replacing at www.wiha.com

Hammer face very hard

Round for soft-faced safety hammer **831-9**

Order-No.	●↕	g	
26510	30	26.8	5
26511	40	57.4	5
26512	50	112	2
26513	60	191	2
26514	80•	395	2

• Also for sledgehammers
You will find detailed instructions on replacing at www.wiha.com

Hickory wooden handle

for safety soft-faced hammer **830-0**

Order-No.	●↕	↔	g	
26417	30	260	93	5
26418	40	280	119	5
26419	50	310	190	2
26420	60	340	202	2
26421	80	400	302	2
26667	80L•	800	601	1

• for sledgehammer
You will find detailed instructions on replacing at www.wiha.com

Soft-faced hammer dead-blow, very hard

with hickory wooden handle, round hammer face

8001

Order-No.	●			g	
39008	30	115	350	444	5
39010	40	125	375	750	5
39012	50	135	385	1040	2
39014	60	165	420	1700	2

Soft-faced hammer dead-blow, very hard

With steel tube handle, round hammer face

8021

Order-No.	●			g	
39017	30	115	290	556	5
39019	40	125	305	792	5
39021	50	135	365	1276	2
39022	60	165	375	1868	2

Soft-faced hammer dead-blow, medium hard

with hickory wooden handle, round hammer face

800

Order-No.	●			g	
02092	25	108	320	300	5
02093	30	115	350	436	5
02094	35	118	355	543	5
02095	40	125	375	736	5
02096	45	130	380	848	2
02097	50	135	385	1085	2
02098	60	165	420	1710	2
02099	70	165	430	2256	2

Soft-faced hammer dead-blow, medium hard

With steel tube handle, round hammer face

802

Order-No.	●			g	
02122	25	108	288	461	5
02123	30	115	290	558	5
02124	35	118	300	659	5
02125	40	125	305	791	5
02126	45	130	310	935	2
02127	50	135	365	1277	2
02128	60	165	375	1879	2
02129	70	165	385	2571	2

Sledgehammer no recoil, medium hard

with hickory wooden handle, round hammer face

800V

Order-No.	●			g	
02101	80	205	880	4580	2
02091	100	210	1000	6880	1

Which drives are used for each individual product? Page 338

Hickory wooden handle

for dead-blow soft-faced hammer

800S

Order-No.	●		g	
02113	25	295	63	10
02114	30/35	320	105	10
02115	40/45	335	142	10
02116	50	335	145	10
02117	60/70	360	192	5
28051	80•	800	792	1
28052	100•	900	1017	1

You will find detailed instructions on replacing at www.wiha.com

Hammer face very hard

Round for soft-faced no-recoil hammer

8001K

Order-No.	●	g	
39149	30	17.4	1
39150	40	69	1
39151	50	67	1
39152	60	115	1

You will find detailed instructions on replacing at www.wiha.com

Hammer face medium hard

Round for soft-faced no-recoil hammer

800K

Order-No.	●	g	
02103	25	13.17	10
02104	30	18.4	10
02105	35	26	10
02106	40	37.5	10
02107	45	52.5	5
02108	50	72	5
02109	60	119	5
02110	70	166	5
02111	80	239	2
02102	100	394	2

You will find detailed instructions on replacing at www.wiha.com

INFOBOX:
No-recoil soft-faced hammer

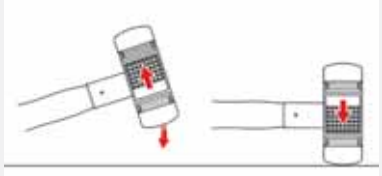

- The special metal filling in the hammer head prevents recoil.
- Approx. 25% more hammer head mass provides additional power.
- Preserves delicate surfaces and edges through high-impact effect.

SoftFinish® dowel racket set with dowels

Phillips with 6 mm round blade in blister pack, 5-pcs. **SB 534S5**

Order-No.	
41289	1
1 x Dowel racket	
2 x 30 mm Dowel / 2 x 40 mm Dowel	

Electrician's hammer

with 300 g hammer head, in blister pack **846**

Order-No.				
42071	23,9	283	500	4

INFOBOX:
SoftFinish® dowel racket set with dowels

- Makes it easier to insert dowels and saves valuable working time.
- Ensures dirt- and dust-free work compared to machines.
- Galvanic separation between the blade and solid steel cap protects against electric shock.
- Perfect for portable use since you can make dowel holes anywhere at any time at the strike of a hammer.

INFOBOX:
Electrician's hammer

- With its optimally uniform weight distribution, this hammer ensures perfect balance, delivering impact and fatigue-free work.
- Its flat claws make it easier to remove fastening components such as nail clamps, even from difficult-to-access spots.
- Optimum access into corners and confined spaces thanks to U-shaped striking surface.
- The flat hammer handle lower surface acts as a soft-faced hammer, ensuring components such as cables and dowels are fixed into position without causing damage.

Which drives are used for each individual product? Page 338

Electrician's spirit level

40 cm 246

Order-No.	mm	g	
42074	400	330	10

Callipers digiMax digital

Reading 0.01 mm 4111

Order-No.			g	
29422	150	6	139	1

CE compliant.

Callipers caliMax®

Reading 0.1 mm 4113

Order-No.			g	
27083	150	6	74	1

Analogue callipers dialMax

Reading 0.1 mm 4112

Order-No.			g	
27082	150	6	104	1

Analogue callipers dialMax ESD

Reading 0.1 mm 4112

Order-No.			g	
31439	150	6	96	1

IEC 61340-5-1.

INFOBOX:
Electrician's spirit level, 40 cm

- Quick, easy marking of positions for up to four flush boxes in just one simple work step thanks to the integrated marking points.
- The continuous housing allows users to mark lines without interruption.
- An additional scale on the upper surface ensure precise measurement even when viewing from above.
- The bubbles are clearly visible, even from a sharp angle.
- The level is perfectly suitable for portable use thanks to its compact design.

Electrician's Longlife® folding ruler, 2 m

UV

metric, 10 segments — **4102008**

Order-No.				
42068	15	orange	135	10

Folding ruler Longlife All in One 2 m

metric, 10 segments — **410 2007**

Order-No.				
33232	15	white	139	10

Folding ruler LongLife Plus Composite 2 m

metric, 10 segments — **410 2005**

Order-No.				
37067	15	red/ black	124	10

Folding ruler Longlife 2 m

metric, 10 segments — **410 2000**

Order-No.				
27058	15	yellow	137	10
27057	15	white	136	10

INFOBOX:

Electrician's Longlife® folding ruler, 2 m

- Integrated with cable retractor for cables between 3-7mm.
- Ruler quick and easy to find – even in dark environments with a UV light.
- Ruler with integrated distance marks for up to 3 flush boxes.
- Tool tested at 10,000 V AC and suitable for 1.000 V AC.

INFOBOX:

Longlife® Plus composite folding ruler

- High rigidity minimises risk of breakage.
- Tight 90° and 180° latching of all joints.
- Metal ends which cannot be lost on the first and last segment.
- Scale running backwards (recto and verso) enables reading from both sides.

Which drives are used for each individual product? Page 338

Folding ruler LongLife Plus 2 m

metric, 10 segments

410 2001

Order-No.				
27055	15	yellow	136	10
27059	15	white	136	10

Folding ruler Longlife 1 m



metric, 10 segments

410 1000

Order-No.				
27061	13	yellow	43	10
27062	13	white	43.5	10

Which page is my product on?

Screwdrivers, torque tools

Screwdrivers

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
Screwdriver SoftFinish®	●	●		●		●	●	●
SoftFinish® screwdriver with fixing function	●	●						
SoftFinish® screwdriver with mm scale	●	●		●				
SoftFinish® Stubby screwdriver	●	●		●				
Screwdriver MicroFinish®	●	●		●		●		
Pocket screwdrivers	●							
PicoFinish® fine screwdriver	●	●		●		●		●
Screwdriver SoftFinish® electric slimFix	●	●	●	●	●	●	●	
Screwdriver SoftFinish® electric	●	●	●	●	●	●		
Bit slimBit electric	●	●	●	●	●	●		
PicoFinish® electric fine screwdriver	●	●						
Voltage tester	●							
Screwdriver SoftFinish® ESD	●	●		●		●		
Fine screwdriver PicoFinish® ESD	●	●		●		●		●

Torque tools

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
Variably adjustable torque screwdriver	●	●		●		●		●
Torque screwdriver firmly pre-set	●	●		●		●		●
Electric torque screwdriver	●	●	●	●	●	●		
Bit slimBit electric	●	●	●	●	●	●		
Torque screwdriver with T-handle						●		●
TorqueFix® torque screwdriver with key handle						●		●

Internal hexagon	Hexagon head	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multi-tooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
●	●				●							
	●											
●	●										●	●
		●										
●	●	●										
●		●										
●	●											

Internal hexagon	Hexagon head	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multi-tooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
●	●											
●	●											
●		●										
●		●										
●												
●												

Which page is my product on?

Multi-tools, L-keys, bits

Multitools

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
Screwdriver with bit magazine LiftUp electric	●	●		●	●	●		
Screwdriver with bit magazine 26one®	●	●		●		●		
Screwdriver with LiftUp 25 + 70 bit magazine	●	●		●		●		
Screwdriver with bit magazine	●	●		●		●		
Screwdriver with bit magazine Stubby	●	●		●		●		
Multitool PocketStar L-key	●	●				●	●	
Screwdriver with interchangeable blade SYSTEM 6	●	●		●		●	●	
Screwdriver with interchangeable blade SYSTEM 4	●	●		●		●		

L-keys



	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
L-keys						●	●	●
L-key set in ErgoStar holder						●		
L-key set in ProStar holder						●		
L-key set in Compact holder								
L-key set in Classic holder						●	●	●
L-key with T-handle ComfortGrip						●		
L-key with Classic T-handle						●		●
L-key with T-handle electric								
L-key with key handle						●		●
L-key with flag handle						●		●

Bits

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
TY-Bit		●		●		●		
T-Bit		●		●		●		
Y-Bit		●		●		●		
Bits with MagicRing®	●	●		●		●	●	●
Bit with thread	●	●	●	●	●	●	●	●
Standard bit in C4 size								
Slotted		●		●		●		
Phillips PH	●	●				●		

Internal hexagon	Hexagon head	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Trian-gular nut	Multitooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
●		●										
●												
●												
●	●						●	●				
●	●											

Internal hexagon	Hexagon head	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Trian-gular nut	Multitooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
●												
●												
●												
●												
●												
●												
●	●		●									
●	●											
●												

Internal hexagon	Hexagon head	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Trian-gular nut	Multitooth	Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe PL	Y-Type
●												
●		●										
●		●		●		●	●	●	●	●		
●		●						●				
●												
●	●										●	

Wiha order number register

Order-No.	
00	
00456	174
00576	227
00577	227
00578	227
00579	227
00580	227
00582	227
00583	227
00584	227
00585	227
00586	227
00587	227
00597	227
00598	227
00599	227
00600	227
00601	227
00602	227
00603	227
00610	225
00613	225
00616	225
00623	221
00629	224
00630	224
00631	224
00632	224
00635	224
00636	224
00637	224
00638	224
00639	224
00654	224
00655	224
00656	224
00657	224
00658	224
00665	224
00666	224
00667	224
00679	183
00683	183
00684	178
00685	178
00686	178
00687	178
00689	178
00690	178
00691	178
00692	178
00694	178
00695	178
00696	178
00697	178
00698	178
00700	178
00701	178
00702	178
00703	178
00704	178
00706	178
00707	178
00708	178
00709	178
00711	178
00712	178
00713	178
00731	183

Order-No.	
00732	183
00733	183
00734	183
00735	183
00736	183
00737	183
00738	183
00739	183
00740	183
00754	178
00756	178
00757	178
00759	178
00760	178
00762	178
00763	178
00764	183
00765	183
00766	183
00767	183
00768	178
00770	178
00772	178
00774	178
00776	183
00777	183
00778	183
00779	183
00819	173
00820	173
00821	173
00822	173
00823	173
00824	173
00825	173
00826	173
00827	173
00828	173
00829	173
00830	173
00831	173
00832	173
00833	166
00834	166
00846	173
00847	173
00848	173
00849	173
00850	173
00853	174
00855	174
00856	174
00857	174
00858	174
00859	174
00860	174
00861	174
00862	174
00863	174
00864	174
00865	174
00866	174
00867	174
00868	174
00877	173
00878	173
00879	173
00880	173
00881	173

Order-No.	
00882	173
00894	251
00895	251
00896	251
00897	251
00904	248
00905	248
00906	248
00907	248
00908	248
00909	248
00910	248
00911	248
00912	248
00913	248
00914	248
00915	248
00916	248
00917	248
00918	248
00919	248
00921	248
00922	248
00923	248
00924	248
00926	248
00928	248
00929	248
00930	248
00931	248
00933	248
00934	248
00937	248
00953	239
00965	249
00966	249
00967	249
00968	249
00969	249
00971	249
00972	249
00973	249
00974	249
00975	249
00977	249
00978	249
00979	249
00980	249
00982	249
00983	249
00985	249
00986	249
00988	249
00989	249
00990	249
00991	249
00993	249
00994	249
00995	249
01	
01005	249
01006	249
01007	249
01008	249
01018	180
01020	180
01021	180
01022	180
01023	180

Order-No.	
01024	180
01025	180
01026	180
01027	180
01028	180
01029	180
01030	180
01031	180
01032	180
01033	180
01034	176
01076	180
01077	180
01078	180
01079	180
01081	180
01092	181
01093	181
01094	181
01095	181
01096	181
01097	181
01098	181
01121	244
01122	244
01123	244
01124	244
01126	244
01128	244
01130	244
01131	244
01132	244
01133	244
01134	244
01135	244
01136	244
01137	244
01138	244
01139	244
01140	244
01141	244
01142	244
01143	244
01285	178
01286	178
01287	178
01288	178
01289	178
01290	178
01291	178
01292	178
01293	178
01294	178
01295	178
01296	178
01297	178
01299	175
01300	179
01301	179
01302	179
01303	179
01304	179
01305	179
01306	179
01310	246
01311	246
01312	246
01313	246
01314	246

Order-No.	
01315	246
01316	246
01317	246
01318	246
01319	246
01320	246
01321	246
01322	246
01323	246
01324	246
01326	238
01328	250
01329	250
01330	250
01331	250
01332	250
01333	250
01334	250
01335	250
01336	250
01337	250
01338	250
01339	250
01340	250
01341	250
01343	250
01345	250
01348	240
01350	251
01351	251
01352	251
01353	251
01354	251
01355	251
01356	251
01391	243
01392	242
01393	242
01395	242
01396	242
01398	242
01400	242
01402	242
01404	242
01406	242
01408	242
01416	233
01418	233
01420	234
01422	243
01423	243
01424	243
01425	243
01426	243
01427	243
01428	243
01429	243
01430	243
01431	243
01432	243
01433	243
01434	243
01435	181
01436	181
01437	181
01438	181
01439	181
01440	181
01443	181

Order-No.	
01475	282
01476	282
01479	282
01481	283
01508	186
01537	186
01538	186
01539	186
01548	186
01623	265
01624	265
01626	265
01627	265
01649	265
01657	265
01658	265
01659	265
01681	265
01688	265
01689	265
01690	265
01703	266
01704	266
01705	266
01706	266
01707	266
01708	266
01709	266
01710	266
01711	265
01712	265
01713	265
01714	265
01715	265
01716	265
01717	265
01718	265
01719	265
01720	265
01721	265
01722	265
01723	265
01724	265
01726	266
01727	266
01728	266
01729	266
01730	266
01731	266
01732	266
01733	266
01734	266
01735	266
01736	266
01737	266
01738	266
01739	266
01740	266
01790	270
01791	270
01792	270
01793	270
01794	270
01795	270
01796	270
01798	270
01799	270
01800	270
01803	270

Order-No.	
01805	270
01808	271
01809	271
01811	271
01812	271
01894	281
01895	281
01910	281
01913	281
01919	281
01922	278
01923	278
01924	278
01926	278
01927	278
01930	278
01933	278
01935	278
01937	276
01938	276
01939	276
01940	276
01942	276
01943	276
01945	276
01946	276
01947	277
01948	277
02	
02091	332
02092	332
02093	332
02094	332
02095	332
02096	332
02097	332
02098	332
02099	332
02101	332
02102	333
02103	333
02104	333
02105	333
02106	333
02107	333
02108	333
02109	333
02110	333
02111	333
02113	333
02114	333
02115	333
02116	333
02117	333
02122	332
02123	332
02124	332
02125	332
02126	332
02127	332
02128	332
02129	332
02292	233
02568	186
02802	249
02803	249
02804	249
02805	249
02806	249

Order-No.	
02807	249
02808	249
02809	249
02810	249
02811	249
02819	250
02820	250
02821	250
02822	250
02823	250
02824	250
02836	181
02837	181
02838	181
02839	181
02840	181
02939	234
03	
03106	179
03107	179
03108	179
03115	266
03117	266
03186	227
03223	182
03224	182
03225	182
03226	182
03228	182
03230	182
03231	182
03232	182
03237	182
03238	182
03239	182
03245	182
03246	182
03247	182
03591	221
03723	233
03724	252
03725	252
03726	252
03727	252
03728	252
03729	252
03730	252
03731	252
03738	178
03739	178
03760	173
03761	173
03762	173
03764	246
03847	188
03848	188
03849	188
03850	188
03851	188
03852	188
03853	188
03854	188
03868	243
03869	243
03870	243
03871	243
03872	243
03873	243
03874	243

Wiha order number register

Order-No.	
03875	243
03876	243
03879	234
03882	224
03883	224
03988	188
03992	234
04	
04009	270
04010	270
04011	266
04059	271
04096	248
04099	248
04105	248
04108	248
04111	248
04126	270
04127	270
04176	271
04194	273
04195	273
04196	273
04197	273
04198	273
04204	278
04362	278
04508	278
04509	278
04510	278
04511	278
04512	278
04513	278
04514	278
04515	278
04516	278
04517	278
04631	278
04632	278
04633	278
04634	278
04635	278
04636	278
04637	278
04638	278
04639	278
04640	278
04670	277
04671	277
04677	276
04678	276
04684	278
04685	278
04918	251
04925	266
04926	266
04927	266
04928	266
04929	266
04930	266
04931	266
05	
05271	174
05298	265
05300	265
05301	273
05302	273
05303	273
05638	243

Order-No.	
05799	271
05800	270
06	
06059	243
06218	244
06358	243
06359	243
06360	243
06361	243
06362	243
06363	243
06364	243
06365	243
06366	243
06367	243
06368	243
06369	243
06370	243
06371	243
06378	234
06379	234
06382	235
06386	234
06634	267
06635	267
06636	267
06637	273
06638	273
06639	273
06725	188
06726	188
06727	188
06728	188
06729	188
06730	188
06731	188
06732	188
06888	270
06889	271
07	
07152	175
07153	175
07155	175
07185	232
07192	232
07855	268
07856	268
07857	268
07859	268
07860	268
07861	268
07869	281
07922	242
07943	264
08	
08047	269
08048	269
08049	269
08056	269
08057	269
08058	269
08065	269
08066	269
08067	269
08068	269
08069	269
08070	269
08179	189
08182	189

Order-No.	
08183	189
08184	189
08185	189
08186	189
08421	268
08422	268
08423	268
08424	268
08425	268
08426	268
08900	224
08901	224
08902	224
08903	224
08904	224
08905	224
08906	224
08907	224
08908	224
08909	224
08911	224
09	
09393	264
20	
20218	272
20219	272
20220	272
20221	272
20222	272
20223	272
20224	272
20542	268
20549	241
20550	241
20551	241
20552	241
20553	241
20554	220
20555	266
20556	266
20557	266
20558	266
20559	266
20560	266
20570	241
20783	220
21	
21045	272
21047	272
21248	176
21249	176
21250	176
21251	176
21960	248
21962	248
22	
22096	239
22168	248
22170	248
22172	248
22174	248
22436	189
22509	270
22510	270
22511	270
22512	271
22591	267
22592	267
22593	267

Order-No.	
22594	267
22595	267
22596	272
22597	272
22598	272
22599	272
22600	272
22603	267
22604	267
22605	267
22606	267
22607	267
22608	267
22655	268
22955	266
22956	266
22957	266
22958	266
22959	266
22960	266
22961	266
22962	266
23	
23031	219
23033	219
23035	219
23037	219
23040	219
23041	219
23047	217
23049	217
23051	218
23053	218
23145	272
23147	272
23149	272
23151	272
23159	186
23173	266
23175	266
23177	266
23179	266
23181	266
23183	266
23185	266
23187	266
23189	266
23191	266
23193	266
23195	272
23197	272
23199	272
23201	272
23203	272
23205	272
23207	272
23209	272
23211	272
23213	270
23215	270
23217	270
23219	270
23221	271
23223	271
23225	271
23226	271
23227	271
23228	271
24	

Order-No.	
24107	246
24109	246
24111	246
24113	246
24115	246
24117	246
24119	246
24121	246
24123	246
24189	232
24302	241
24303	241
24304	241
24305	241
24306	241
24307	241
24308	241
24312	237
24313	246
24314	246
24315	246
24316	246
24317	246
24318	246
24319	246
24320	246
24321	246
24322	246
24323	246
24324	246
24325	246
24341	241
24506	175
24515	246
24517	246
24519	246
24521	246
24523	246
24525	246
24527	246
24529	246
24531	246
24533	246
24733	268
24742	268
24746	268
24748	268
24750	268
24851	232
24852	237
24867	272
25	
25097	265
25128	218
25130	218
25164	218
25166	218
25293	217
25295	217
25477	166
25553	272
25560	266
25561	266
25562	266
25563	266
25564	266
25572	267
25624	240
25625	240

Order-No.	
25679	268
25681	268
25739	272
25740	272
25741	272
25742	272
25874	282
25994	266
25996	266
25998	266
26	
26000	272
26002	272
26045	267
26047	203
26048	203
26049	203
26051	203
26052	203
26053	203
26058	204
26059	204
26060	205
26061	205
26062	205
26063	205
26064	204
26065	204
26066	204
26067	204
26068	204
26069	204
26070	204
26071	204
26072	204
26073	204
26077	179
26079	179
26081	179
26083	179
26085	179
26087	179
26091	179
26093	179
26095	179
26097	179
26099	179
26101	179
26103	179
26105	179
26107	179
26109	179
26111	179
26113	175
26122	227
26123	227
26124	227
26127	203
26128	203
26129	203
26130	203
26131	203
26133	203
26135	247
26136	247
26137	247
26138	247
26139	247
26140	247

Order-No.	
26148	204
26151	204
26152	204
26154	204
26155	204
26156	204
26157	204
26158	204
26159	204
26164	247
26165	247
26166	247
26167	247
26168	247
26169	247
26170	247
26171	247
26172	247
26173	247
26174	247
26175	247
26176	247
26177	247
26178	247
26179	283
26181	252
26182	252
26183	252
26184	252
26185	252
26186	252
26187	252
26188	252
26190	179
26191	179
26192	179
26193	179
26194	179
26195	179
26196	204
26197	204
26198	204
26199	204
26200	205
26212	181
26213	181
26214	181
26216	181
26217	181
26221	204
26222	204
26223	204
26224	204
26225	204
26227	204
26228	204
26229	205
26230	180
26231	180
26232	180
26233	180
26234	180
26247	239
26248	239
26249	267
26250	265
26252	265
26253	265
26259	178

Order-No.	
26260	178
26261	240
26277	204
26278	204
26279	204
26303	179
26304	179
26305	179
26307	179
26309	266
26327	203
26328	179
26329	179
26330	179
26331	179
26332	179
26333	179
26346	266
26347	266
26348	266
26349	266
26350	266
26351	266
26352	267
26353	267
26354	267
26355	267
26356	267
26417	331
26418	331
26419	331
26420	331
26421	331
26422	330
26423	330
26424	330
26425	330
26426	330
26427	330
26428	330
26429	330
26430	330
26431	329
26432	329
26433	329
26434	329
26435	329
26436	329
26437	329
26439	329
26451	268
26454	178
26455	178
26457	179
26458	179
26461	202
26462	202
26463	202
26464	202
26509	329
26510	331
26511	331
26512	331
26513	331
26514	331
26544	205
26582	330
26611	329
26612	329

Wiha order number register

Order-No.	
26613	329
26614	329
26615	331
26616	331
26618	331
26620	331
26625	195
26626	195
26627	195
26629	209
26640	330
26641	330
26642	330
26643	330
26644	330
26645	330
26646	330
26647	330
26648	330
26649	329
26650	329
26651	329
26652	329
26653	329
26654	329
26655	329
26656	329
26657	330
26658	330
26659	330
26660	330
26661	330
26663	330
26664	330
26665	330
26666	330
26667	331
26668	331
26669	331
26670	331
26671	331
26672	331
26674	330
26703	305
26704	304
26705	290
26706	305
26707	304
26708	290
26709	305
26710	304
26711	290
26712	305
26713	305
26714	290
26715	305
26716	305
26717	290
26718	306
26719	306
26720	291
26721	306
26722	306
26723	306
26724	306
26725	306
26726	306
26727	291
26728	292

Order-No.	
26729	292
26730	307
26731	307
26732	292
26733	308
26734	308
26735	292
26745	288
26755	145
26757	310
26758	310
26759	310
26760	309
26761	309
26762	309
26763	309
26764	309
26765	309
26766	309
26767	309
26771	310
26772	310
26773	311
26774	311
26775	311
26776	311
26777	311
26778	311
26779	311
26780	311
26781	313
26782	313
26783	313
26784	313
26785	313
26786	313
26787	313
26788	313
26789	313
26790	313
26791	313
26792	313
26793	301
26794	313
26795	313
26796	313
26797	313
26799	319
26801	323
26802	319
26804	319
26806	319
26808	317
26812	322
26813	322
26814	317
26815	322
26816	317
26818	322
26821	317
26822	317
26825	322
26826	318
26830	323
26831	318
26832	318
26833	322
26835	318
26839	318

Order-No.	
26840	318
26845	294
26846	294
26847	294
26850	300
26852	286
26853	300
26854	300
26864	205
26865	209
26866	209
26888	202
26889	204
26893	202
26901	203
26920	186
26925	203
26928	189
26929	189
26931	178
26953	251
26954	251
26955	251
26956	251
26957	251
26958	251
26959	251
26960	251
26964	183
26965	183
26966	183
26967	183
26968	183
26969	183
26970	183
26971	183
26972	183
26973	183
27	
27028	267
27030	267
27055	337
27057	336
27058	336
27059	337
27061	337
27062	337
27064	267
27065	267
27066	267
27067	267
27077	268
27079	204
27082	335
27083	335
27144	189
27145	189
27146	189
27147	189
27148	189
27149	189
27150	189
27151	189
27252	188
27253	188
27256	267
27257	267
27258	267
27259	267

Order-No.	
27260	267
27325	305
27326	323
27327	304
27328	290
27329	319
27336	305
27337	305
27340	306
27341	306
27342	306
27343	306
27344	307
27345	308
27350	309
27351	309
27368	294
27372	310
27373	310
27374	310
27375	310
27376	310
27377	311
27378	311
27379	311
27380	311
27381	309
27382	309
27383	309
27384	309
27388	322
27390	322
27391	322
27393	322
27395	322
27397	323
27398	322
27399	304
27418	290
27419	290
27420	290
27421	290
27422	291
27423	291
27424	292
27425	292
27426	292
27427	292
27431	288
27437	294
27439	319
27440	319
27441	319
27442	317
27443	317
27444	317
27445	317
27446	317
27447	318
27448	318
27449	318
27450	318
27452	318
27453	318
27501	311
27502	311
27503	311
27504	311
27526	205

Order-No.	
27530	266
27606	186
27614	252
27615	252
27616	252
27617	252
27618	252
27619	252
27620	252
27621	252
27627	224
27628	224
27629	224
27630	224
27631	224
27632	224
27633	224
27634	224
27635	224
27636	224
27637	224
27638	224
27639	224
27641	189
27712	222
27713	222
27736	179
27737	179
27738	179
27739	179
27740	179
27741	179
27742	179
27743	179
27744	179
27745	179
27746	175
27753	178
27754	178
27755	178
27756	178
27757	178
27758	178
27811	179
27812	204
27813	204
27814	204
27815	204
27816	204
27817	204
27818	204
27820	225
27892	277
27893	277
27894	277
27895	277
27896	277
27897	277
27898	277
27899	277
27900	277
27901	277
27905	319
27928	250
27929	250
27930	250
27931	250
27932	250
27933	250

Order-No.	
27934	250
27935	250
27936	217
27963	277
27964	251
27965	251
27966	251
27967	251
27968	251
27969	251
27970	251
27971	251
28	
28005	179
28026	277
28027	277
28051	333
28052	333
28058	277
28330	297
28372	247
28373	247
28374	247
28375	247
28376	247
28377	247
28402	314
28481	272
28691	201, 207
28734	207
28735	207
28736	207
28737	207
28738	207
28739	207
28740	207
28741	207
28742	207
28743	207
28744	207
28745	207
28746	207
28747	207
28748	207
28749	207
28756	207
28757	207
28758	207
28760	179
28761	179
28762	179
28763	179
28764	179
28765	179
28766	179
28767	179
28769	179
29	
29133	187
29134	187
29135	187
29136	187
29137	187
29138	187
29139	187
29149	187
29150	187
29151	187
29158	187

Order-No.	
29159	187
29162	187
29163	187
29164	187
29165	187
29228	206
29229	206
29230	206
29231	206
29232	206
29233	206
29234	206
29236	206
29416	262
29417	262
29420	299
29422	335
29425	313
29427	313
29428	313
29429	313
29435	314
29436	314
29437	314
29441	314
29442	314
29443	314
29463	283
29466	167
29467	204
29471	242
29472	242
29473	242
29474	242
29475	242
29485	315
29486	315
29487	315
29544	269
29550	314
29553	204
29554	204
29555	204
29556	204
29557	204
29558	204
29559	204
29560	204
30	
30050	266
30066	297
30361	173
30362	173
30363	173
30364	173
30365	173
30366	173
30372	223
30373	227
30404	223
30495	209
30700	173
30701	173
30715	173
30716	173
30824	153
30826	304
30852	204
30978	304

Order-No.	
30979	304
31	
31233	244
31234	244
31235	244
31236	244
31237	244
31238	244
31239	244
31240	244
31241	244
31242	244
31243	244
31244	244
31432	189
31439	335
31496	223
31497	223
31498	227
31499	227
31771	174
31863	173
31901	189
31957	271
31958	271
31959	271
31960	270
31961	270
31962	270
31973	272
31975	272
31977	272
32	
32055	268
32070	268
32071	268
32105	270
32160	282
32161	283
32201	174
32250	179
32251	179
32252	179
32253	179
32254	179
32255	179
32256	179
32264	179
32265	179
32281	167
32282	167
32298	222
32299	271
32302	271
32303	271
32304	271
32305	271
32306	271
32307	272
32308	272
32309	272
32310	283
32311	283
32318	320
32319	305
32320	305
32322	306
32323	306
32324	306

Wiha order number register

Order-No.	
32325	320
32326	320
32327	320
32328	306
32329	320
32330	307
32332	308
32334	320
32335	321
32336	321
32338	321
32340	321
32342	309
32343	321
32344	321
32345	294
32346	320
32347	320
32349	316
32352	309
32383	178
32384	178
32386	244
32387	244
32388	244
32389	244
32390	244
32391	244
32392	244
32393	244
32394	236
32395	236
32396	173
32397	173
32399	178
32400	178
32404	182
32405	182
32406	182
32409	271
32410	271
32411	271
32412	271
32413	271
32414	271
32415	271
32416	271
32417	271
32418	271
32419	271
32421	271
32423	271
32477	280
32484	283
32486	272
32490	271
32491	271
32492	271
32493	271
32494	271
32495	271
32496	271
32497	271
32505	276
32547	279
32556	279
32573	279
32686	271
32687	271

Order-No.	
32688	271
32689	271
32804	274
32805	273
32806	273
32808	273
32867	182
32868	182
32869	182
32870	182
32871	182
32901	216
32902	216
32903	216
33	
33007	216
33008	216
33009	216
33178	291
33186	290
33232	336
33471	323
33472	323
33503	226
33507	316
33520	293
33521	317
33703	270
33704	270
33705	270
33706	271
33707	271
33708	271
33709	271
33710	271
33711	271
33712	271
33713	271
33714	272
33715	272
33716	272
33717	271
33718	271
33719	271
33720	271
33721	271
33722	272
33723	272
33724	272
33725	272
33726	272
33727	272
33728	272
33729	272
33730	272
33731	272
33732	272
33736	216
33738	216
33740	216
33741	216
33743	216
33744	216
33746	216
33749	244
33750	244
33753	235
33754	235
33764	216

Order-No.	
33841	298
33842	299
33843	299
33844	298
33848	226
33920	272
33921	272
33922	272
33923	272
33924	272
33925	272
33926	272
33927	272
33928	272
33929	272
33930	272
33931	272
33932	272
33961	270
33962	270
33963	270
33964	270
33965	270
33966	270
33969	145
33970	152
33971	152
34	
34306	281
34307	304
34308	304
34309	306
34310	307
34312	309
34313	294
34452	271
34453	271
34454	271
34455	271
34456	271
34457	271
34515	306
34518	309
34533	203
34554	273
34555	273
34556	273
34557	273
34558	273
34559	273
34560	273
34565	304
34567	305
34568	308
34569	306
34570	306
34577	168
34578	170, 199
34579	170, 199
34580	170, 199
34581	170, 199
34582	170, 199
34583	170, 199
34584	170, 199
34585	170, 199
34586	170, 199
34587	170, 199
34588	170, 199
34589	170, 199

Order-No.	
34590	170, 199
34614	202
34686	264
34688	312
34689	312
34690	312
34691	312
34692	312
34693	312
34694	312
34695	312
34696	312
34697	312
34698	312
34699	312
34700	312
34701	312
34702	312
34703	312
34704	312
34705	312
34706	312
34707	312
34708	301
34729	293
34730	293
34736	238
34737	238
34740	235
34741	235
34743	293
34744	293
34745	174
34746	268
35	
35378	174
35389	166
35390	172
35391	172
35392	172
35393	172
35394	172
35395	172
35396	172
35397	182
35398	182
35400	276
35401	276
35402	276
35403	276
35446	172
35456	270
35457	270
35462	292
35465	290
35477	291
35479	293
35480	232
35481	232
35482	242
35483	242
35484	242
35485	242
35486	242
35487	242
35488	242
35489	242
35490	242
35501	172

Order-No.	
35502	172
35503	172
35504	172
35505	172
35506	170, 199
35507	170, 199
35508	170, 199
35509	170, 199
35510	170, 199
35511	170, 199
35538	296
35704	293
35705	293
35709	268
35820	323
35832	268
35834	268
35861	297
35862	297
35870	197
35969	296
36	
36038	309
36039	309
36040	309
36041	309
36050	295
36051	296
36052	296
36053	296
36071	170, 199
36072	182
36079	197
36082	273
36085	182
36086	273
36092	281
36093	281
36094	281
36112	281
36114	220
36189	307
36193	273
36217	293
36218	312
36219	312
36220	312
36221	312
36222	312
36223	312
36224	312
36225	312
36226	312
36229	203
36230	203
36231	203
36233	203
36234	203
36235	203
36236	203
36237	203
36238	203
36239	203
36240	203
36272	312
36275	268
36280	268
36282	268
36285	268

Order-No.	
36288	268
36310	265
36320	203
36321	203
36327	271
36329	172
36330	172
36333	166
36388	151
36389	144
36390	151
36414	205
36415	205
36417	205
36418	205
36421	205
36452	242
36453	233
36454	233
36455	166
36458	238
36459	238
36461	238
36462	238
36483	307
36487	236
36503	235
36521	231
36536	172
36537	172
36538	172
36539	172
36540	172
36541	172
36542	172
36558	166
36711	294
36791	194
36794	323
36800	280
36846	203
36847	203
36849	202
36850	202
36851	209
36852	209
36886	201
36887	201
36888	201
36951	262
36975	312
36976	312
36977	312
36978	312
36979	312
36980	312
36981	293
36985	309
36986	309
36987	309
36988	309
36990	261
37	
37067	336
37147	170, 199
37222	170, 199
37223	170, 199
37224	170, 199
37225	170, 199

Order-No.	
37226	170, 199
37227	170, 199
37351	231
37402	307
37403	307
37450	293
38	
38020	144
38060	302
38074	195
38189	301
38190	301
38191	288
38362	166
38370	271
38371	271
38372	271
38552	287
38556	208
38557	208
38558	208
38600	216
38601	216
38605	216
38606	216
38610	214
38611	214
38612	214
38613	214
38616	208
38617	208
38618	208
38619	208
38620	208
38621	208
38622	208
38627	287
38631	293
38632	293
38636	293
38637	286
38649	268
38650	268
38651	268
38652	268
38653	268
38654	268
38656	268
38657	268
38658	268
38659	268
38660	268
38676	273
38677	273
38679	273
38680	273
38681	273
38684	273
38685	273
38686	273
38687	273
38688	273
38689	273
38690	273
38706	273
38707	273
38708	273
38709	273
38710	273

Order-No.	
38711	273
38712	273
38713	273
38714	273
38715	273
38716	273
38717	273
38718	273
38798	296
38800	208
38801	208
38802	208
38803	208
38804	208
38805	208
38806	208
38807	208
38808	208
38809	208
38810	208
38811	208
38812	208
38813	208
38814	208
38815	208
38816	208
38817	208
38818	208
38819	208
38820	208
38821	208
38853	287
38854	287
38855	290
38856	290
38857	291
38858	291
38859	292
38865	293
38866	293
38867	294
38918	200
38919	200
38920	200
38921	200
38925	200
38926	200
38927	200
38928	200
38929	200
38930	200
38931	200
38932	200
38933	200
38934	200
38935	200
38936	200
38981	302
38982	301
38983	301
38984	288
38985	297
38986	297
39	
39008	332
39010	332
39012	332
39014	332
39017	332

Wiha order number register

Order-No.	
39019	332
39021	332
39022	332
39029	262
39037	263
39039	263
39040	262
39041	262
39045	263
39049	263
39056	263
39057	263
39059	263
39060	263
39076	220
39078	262
39083	263
39091	310
39093	310
39094	310
39095	310
39104	237
39105	237
39106	245
39107	245
39108	245
39109	245
39110	245
39111	245
39112	245
39113	245
39114	245
39115	245
39116	245
39117	245
39118	245
39124	262
39133	280
39134	280
39149	333
39150	333
39151	333
39152	333
39178	273
39179	273
39180	273
39181	273
39182	273
39183	273
39184	271
39185	271
39186	271
39187	271
39188	272
39189	272
39190	272
39191	272
39192	272
39193	272
39194	272
39195	272
39196	272
39197	272
39198	272
39199	272
39200	272
39201	272
39202	272
39203	272

Order-No.	
39204	272
39206	273
39207	273
39208	273
39374	315
39375	315
39376	315
39377	315
39378	315
39379	315
39380	315
39381	315
39382	267
39591	178
39875	266
39964	276
39971	274
40	
40282	146
40331	282
40342	298
40401	242
40402	242
40403	242
40404	242
40405	242
40406	242
40407	242
40408	242
40409	242
40410	233
40411	233
40461	270
40462	270
40463	270
40464	270
40465	270
40523	140
40600	275
40601	275
40602	275
40603	275
40604	275
40605	275
40606	275
40607	275
40608	275
40609	275
40610	275
40611	275
40612	275
40613	275
40614	275
40615	275
40616	275
40617	275
40618	275
40619	275
40620	275
40621	275
40622	275
40623	275
40624	275
40625	275
40626	275
40627	275
40628	275
40629	275
40630	275

Order-No.	
40631	275
40632	275
40633	275
40634	275
40635	275
40636	275
40637	275
40638	275
40639	275
40640	275
40641	275
40642	275
40643	275
40644	275
40645	275
40646	276
40647	276
40648	276
40649	276
40650	276
40651	276
40652	276
40653	276
40654	276
40655	276
40656	276
40657	276
40658	276
40659	276
40660	276
40661	276
40663	276
40674	195
40709	291
40712	311
40713	311
40913	303
40919	303
40920	303
40921	289
40922	289
40923	308
40927	291
40948	146
40966	245
40967	245
40968	245
40969	245
40970	245
40971	245
40972	245
40973	245
40974	245
40975	245
40976	245
40977	245
40978	245
40979	236
40980	236
41	
41002	175
41003	165
41015	323
41141	172
41142	172
41143	172
41144	172
41145	172
41146	172

Order-No.	
41147	172
41157	214
41158	214
41159	170, 199
41160	170, 199
41218	291
41220	311
41221	311
41222	323
41223	145
41230	167
41231	164
41232	164
41233	164
41234	214
41235	214
41241	143
41245	166
41246	298
41261	303
41266	303
41272	303
41273	303
41274	289
41275	289
41277	303
41278	303
41279	289
41280	289
41286	160
41289	334
41301	303
41307	303
41309	289
41310	289
41311	303
41317	303
41318	303
41319	289
41320	289
41321	303
41327	303
41329	289
41330	289
41341	196
41342	196
41343	196
41344	196
41345	196
41476	196
41477	196
41478	196
41479	196
41483	230
41585	261
41586	261
41587	261
41588	261
41589	261
41590	261
41591	261
41592	261
41593	261
41594	261
41595	261
41596	261
41597	261
41598	260
41599	260

Order-No.	
41600	260
41601	260
41602	260
41603	260
41604	260
41605	260
41606	260
41607	260
41608	260
41609	260
41610	260
41611	260
41612	260
41613	260
41614	260
41621	260
41622	260
41623	260
41624	261
41625	261
41626	261
41627	261
41628	261
41629	261
41630	261
41631	261
41632	261
41633	261
41634	261
41635	261
41636	261
41637	259
41638	259
41639	259
41640	259
41641	259
41642	259
41643	259
41644	259
41645	259
41646	259
41647	259
41648	259
41649	259
41650	259
41651	259
41652	259
41653	259
41660	259
41662	259
41663	259
41824	259
41825	259
41826	259
41827	261
41828	261
41829	261
41830	258
41831	258
41832	260
41833	260
41834	260
41894	241
41895	241
41896	241
41897	241
41898	241
41899	241
41900	241

Order-No.	
41901	241
41902	241
41911	156
41912	156
41913	157
41914	158
41915	158
41922	281
41923	299
41973	241
41974	241
41975	241
41976	241
41977	241
41978	241
41979	230
42	
42062	295
42068	336
42069	138
42071	334
42074	335
42086	161
42096	258
42097	256
42098	257
42099	256
42100	258
42101	258
42102	258
42103	258
42104	258
42105	258
42106	258
42107	258
42108	258
42109	258
42110	258
42111	258
42112	258
42113	258
42114	256
42115	256
42116	256
42117	256
42118	256
42119	256
42120	256
42121	256
42122	256
42123	256
42124	256
42125	256
42126	256
42127	256
42128	256
42129	256
42130	256
42131	256
42132	256
42133	256
42134	256
42135	257
42136	257
42137	257
42138	257
42139	257
42149	258
42150	258

Order-No.	
42162	295
42266	156
42267	156
42268	157
42292	260
42293	260
42294	261
42295	261
42301	260
42302	260
42303	261
42304	261
42305	261
42306	260
42374	174
42375	174
42376	174
42377	174
42378	174
42379	174
42380	174
42381	184
42382	184
42383	184
42384	184
42385	184
42386	184
42387	184
42388	184
42389	184
42390	184
42391	184
42392	184
42393	184
42394	184
42395	184
42397	184
42398	184
42399	184
42401	184
42402	184
42403	184
42413	184
42414	184
42415	184
42416	184
42418	184
42419	184
42420	185
42421	185
42422	185
42423	185
42424	185
42425	185
42426	185
42427	185
42428	185
42429	185
42430	185
42431	185
42432	185
42433	185
42434	185
42435	185
42436	185
42437	185
42438	185
42439	185
42440	185

Order-No.	
42441	185
42442	185
42443	185
42444	185
42445	185
42446	185
42447	185
42448	185
42449	185
42450	185
42451	185
42452	185
42453	185
42454	185
42455	185
42456	185
42457	185
42458	185
42459	185
42460	185
42461	185
42462	185
42463	185
42464	184
42465	184
42466	184
42467	184
42468	184
42469	184
42470	184
42471	174
42474	184
42475	184
42476	184
42477	184
42478	184
42479	184
42480	184
42481	184
42482	184
42483	184
42484	184
42485	184
42486	184
42487	184
42488	184
42489	184
42490	184
42491	184
42492	184
42493	184
42494	184
42501	184
42502	184
42503	184
42504	184
42505	184
42506	184
42507	185
42539	258
42548	258
42549	258
42550	258
42551	258
42766	158
42989	168
42990	177
42991	177
42992	177

Wiha order number register

Order-No.	
42993	177
42994	177
42996	177
42997	177
42998	177
43	
43022	148
43023	147
43024	147
43026	148
43027	148
43028	148
43029	148
43030	148
43031	148
43032	148
43033	148
43034	148
43035	148
43036	148
43037	148
43038	148
43039	148
43040	148
43041	148
43042	148
43043	148
43044	148
43052	150
43053	150
43055	150
43056	150
43057	150
43058	150
43061	148
43062	149
43063	149
43065	149
43066	149
43067	149
43068	149
43069	149
43070	149
43071	149
43072	149
43073	149
43074	149
43075	149
43076	149
43077	149
43078	149
43079	149
43080	149
43081	149
43082	149
43083	149
43084	149
43085	149
43086	149
43087	149
43088	149
43089	149
43090	149
43091	149
43092	149
43093	149
43094	149
43095	149
43096	149

Order-No.	
43097	149
43098	149
43099	149
43100	150
43101	150
43102	150
43103	150
43104	150
43105	150
43106	150
43107	150
43108	150
43114	170, 199
43115	170, 199
43116	170, 199
43117	170, 199
43125	295
43128	197
43140	170, 199
43141	170, 199
43142	170, 199
43143	170
43144	170
43145	170
43146	170
43147	170
43148	170
43149	170
43150	170
43151	170
43152	169, 197
43153	169, 197
43154	169, 197
43155	169, 198
43156	169, 198
43157	169, 198
43158	169, 198
43159	169, 198
43160	169, 198
43161	169, 198
43162	169, 198
43163	171
43164	171
43167	167
43177	200
43240	307
43304	302
43324	302
43325	302
43326	288
43327	288
43332	302
43333	302
43334	302
43335	288
43336	288
43337	302
43338	302
43339	302
43340	288
43341	288
43450	302
43451	302
43452	302
43453	288
43454	288
43455	302
43456	302
43457	302

Order-No.	
43458	288
43459	288
43460	302
43461	302
43462	302
43463	288
43464	288
43465	143
43613	214
43631	159
43634	201
43669	190
43670	190
43671	190
43672	190
43673	190
43674	190
43675	190
43676	190
43677	190
43678	190
43679	190
43680	190
43681	190
43682	190
43683	190
43684	190
43685	190
43686	190
43687	190
43688	190
43689	190
43690	190
43691	190
43692	190
43693	190
43694	190
43695	190
43696	190
43697	190
43698	190
43699	190
43700	190
43701	190
43702	190
43703	190
43704	190
43705	190
43706	190
43707	189
43708	189
43709	283
43797	160, 174
43798	160, 174
43847	236
43848	235
43849	230
43850	231
43851	230
43852	231
43858	215
43859	215
43860	215
43861	215
43862	215
43863	215
43864	215
43865	215
43866	215

Order-No.	
43867	215
43868	215
43869	215
43870	215
43879	142
43882	184
43895	214
43898	209
43994	153
44	
44008	328

Wiha article number register

Art.-No.	
22	
2270P	168, 174
2271P	174
24	
246	335
24601	220
246176	295
24622	296
24628	283
24629	283
24636	279
24667	220
24670	160
24675	295
24676	296
24677	296
24678	296
24680	296
24681	220
25	
255-11	174
25513	160, 174
25514	160, 174
255-3	174
255-7	174
26	
260P	177, 184
2611P	184
261P	184
262P	184
263P	177, 185
264P	177, 185
264PZ	185
265P	177, 185
265PZ	185
266P	184
266PY	184
267P	177, 185
267PIP	184
267PR	177, 184
268P	185
269	227
26900	227
26901	227
26911	227
2691ESD	227
26922	227
26937	227
26955	227
269ESD	226
269T	225
269TESD	227
27	
270P	189, 190
271P	190
273P	190
275P	190
276P	190
276PY	190

Art.-No.	
277P	189, 190
278P	190
28	
281 01	283
281 02	282
281-01ESD	283
281P	283
2831	164, 167-169, 171, 197, 198, 214
283100	168
283110	170, 199
283111	170, 199
283112	170, 199
283113	170, 199
283114	170, 199
283115	170, 199
283116	170
283117	170, 199
283118	170, 199
28352	201
28360	208
283693	208
283695	208
283696	208
283793	200
283794	200
283795	200
283799	201
284	223
28400	224
28401	224
28411	224
28422	224
28437	224
2844	224
28455	224
284ESD	223
284T	221, 222
284TR	224
284TS	224
284TW	224
2850	203
2852	202
2852 S10	202
2852 S10-01	202
2859	205
28590	204
28591	204
28592	204
28593	205
28594	205
28595	204
28595R	204
28596	204
28596R	204
28597	204
285992	205
285994	205
2872	195

Art.-No.	
2872 S3	195
2872 T13	195
2872 T18	194
2879 B7	197
28799	197
2882	209
2882 S10	209
2891	206
2893	206
2893 S01	206
2899	207
28993	207
28995	207
28996	207
28999	207
29	
2909	161
2920	203
2933	200
2970	196
29701 080 S4	196
29701 200 S4	196
29701 280 S4	196
29701 S5	196
30	
300	183
301	183
302	175, 178
3021	182
3022	178
302ESD	188, 189
302SY	183
308	176, 183
31	
311	178
3111	182
311ESD	189
311SY	183
312	183
313	178
313ESD	189
313SY	183
314	183
32	
3201	165, 166, 172
320N	166, 173
3211	172
321N	173
322	174
322 K5	167
323N	173
324	173
3241	172
325	173
3251	166, 172
3251 TR	172
3251TR	166
327	167, 173
3271	172

Art.-No.	
328	167, 173
3281	172
33	
331	251
334	239, 248
334DS	239, 247
334DSR	247
334N	250
334R	239, 248
334Z	249
336	249
336N	250
336Z	250
338	249
34	
341	176, 180
343	180
344	181
347	181
347Z	181
35	
350	234, 244
351P	217, 219
352B	234, 235, 243
356	179
357	180
3581	172
358N	173
36	
361IP	238, 246
362	175, 178
362BE	179
362ESD	188, 189
362IP	179
362R	175, 179
362RIP	179
362TR	175, 179
363	238, 246
363P	217, 218
363TR	238, 246
363TRP	218
364	240, 250
364DS	239, 247
364IP	251
364R	251
365	240, 251
365IP	240, 252
366	237, 238, 246
366 TS	245
366BE	236, 244
366BET	236, 245
366R	235, 244
366TS	237
367	179
367R	179
369	232, 233, 242
369 Zoll B	243
369B	234, 243
369F	230, 241

Art.-No.	
369K	233, 242
369R	231, 241
369RF	230, 241
369RP	219
369RZ	231, 241
369T	232, 242
369Z	242
369ZB	232, 234
37	
370	240, 252
370IP	252
372	181
38	
3801	216
3802	214
380302	216
3809	216
384	282
386	282
387 01	282
387 02	282
387ESD	283
388	283
388DS	283
39	
397	182
398	182
40	
400 10	186
405	188
41	
410 1000	337
410 2000	336
410 2001	337
410 2005	336
410 2007	336
4102008	336
4111	335
4112	335
4113	335
43	
430	186
50	
500	186
509	186
53	
530	176, 182
531	182
532	182
54	
540	248
540DS	247
55	
5527	187
5533	187
5534	187
5535	187
59	
590	156, 157, 159

Art.-No.	
5991	158
5992	158
70	
7000 4 Z	275
7000 SK65 ESD	274
7001 4 Z	275
7003 4 Z	275
7005 4 Z	275
7009 4 Z	275
7010 Z	265
7011 DWS	267, 268
7011 Z	265
7011Z	269
7012 Z	265
7012Z	269
7013 Z	266
7013 Z TR	266
7013R Z	266
7015 Z	265
7015 Z TR	266
7015K Z	266
7015Z	269
7016 Z	266
7016 Z IPR	266
7017 Z	266
7017R Z	266
7018 Z	267
7019 Z SIT	267
7019 Z SP	267
7019 Z TS	267
7019 Z TW	267
7019 Z XZN	267
7040 Z	270
7041 Z	270
7042 Z	271
7043 Z	273
7043R Z	272
7044	278
7044 4 Z	276
7044 M	278
7045 Z	271
7045 Z TR	272
7045BE	271
7045BE 9570	274
7045R	271
7046 Z	272
7047R Z	272
7048 Z	273
7049 TS	272
7049PHM	271
7049PZM	271
71	
7103	276
7110	276
7110H	281
7113	281
7113 P	281
7113 S	281
7123	280

Art.-No.	
7140	281
7143	281
7148 CF	280
7148 CS	280
7148C	280
7183	281
72	
7201	278
7203	278
7204Z-516	279
7207NEX	150
7207NHS	150
7207NRW	150
7208NEX	150
7208NHS	150
7210	278
7240	278
73	
7311 Z	276
7312 Z	276
7321 Z	276
7322 Z	276
7325 Z	276
7331 Z	276
7332 Z	277
7341 Z	277
7342 Z	277
74	
7410Z	215
7419Z	215
78	
7802	224
7803	224
7806	277
7807	277
79	
79186 B5	277
79187 B5	277
7928-913	264
7928-923	264
7928-928	264
7930 Z	270
7945	261
7947-005	262
7947-505	262
7947-505TR	263
7947-902	263
7947-904	262
7947-905	262
7947-995	263
7947-999	262
7948-005	262
7948-043	262
7948-927	262
7979-01	265
7979-02	265
7979-03	265
80	
800	332

Art.-No.	
8001	332
8001K	333
800K	333
800S	333
800V	332
802	332
8021	332
82	
829-0	331
83	
830-0	331
831-1	330
831-3	330
831-5	330
831-8	331
831-9	331
832 B8	328
832-13	329
832-15	329
832-33	329
832-35	329
832-38	329
832-39	330
832-55	330
832-99	330
84	
846	334
93	
9300	153
9300-019	152
9300-020	152
9300-024	151
9300-026	151
9300-041	153
SB	
SB 3803 04 020	214
SB 430 40 K10	186
SB 430 4010	186
SB 534S5	334
SB 7945-TY202	257
SB 7945-TY303	257
SB 7945-TY505	257
SB 7945-TY903	257
SB 7945-TY904	257
SB 7945-TY905	257
SB 7946-TY202	256
SB 7946-TY303	256
SB 7946-TY505	256
SB 7946-TY903	256
SB 7946-TY904	256
SB 7946-TY905	256
SB 7947-005	263
SB 7947-505	263
SB 7947-505TR	263
SB 7947-902	263
SB 7947-904	263
SB 7947-999	263
SB 7947-T303	259
SB 7947-T906	259

Wiha article number register

Art.-No.	
SB 7947-T999	259
SB 7947-Y202	261
SB 7947-Y505	261
SB 7947-Y904	261
SB 7948-T950	258
SB 7948-T999	258
SB 7948-Y505	260
SB 7948-Y904	260
SB 7948-Y950	260
Z	
Z 01 0 01	305
Z 01 0 02	304
Z 01 0 05	304
Z 01 0 06	290
Z 01 0 09	290
Z 02 0 01	305
Z 02 0 02	305
Z 02 0 05	305
Z 02 0 06	290
Z 02 0 09	290
Z 02 2 01	291
Z 02 2 02	291
Z 05 0 01	306
Z 05 0 02	306
Z 05 0 05	306
Z 05 0 06	291
Z 05 0 09	291
Z 05 1 01	306
Z 05 1 02	306
Z 05 1 05	306
Z 05 1 06	292
Z 05 1 09	292
Z 07 0 01	307
Z 07 0 02	307
Z 07 0 05	307
Z 07 0 06	292
Z 09 0 01	308
Z 09 0 02	308
Z 09 0 05	308
Z 09 0 06	292
Z 12 1 06	288
Z 12 1 09	288
Z 14 0 06	288
Z 14 1 01	287
Z 14 1 06	287
Z 15 0 01	307
Z 16 2 01	303
Z 16 3 02	303
Z 16 3 05	303
Z 16 3 06	289
Z 16 3 09	289
Z 17 0 01	310
Z 18 0 01	302
Z 18 0 02	301
Z 18 0 05	301
Z 18 0 06	288
Z 21 0 01	309
Z 21 0 02	309
Z 21 0 05	309
Z 21 0 06	293

Art.-No.	
Z 22 0 01	309
Z 22 0 02	309
Z 22 0 05	309
Z 22 0 06	293
Z 23 1 01	310
Z 23 1 05	310
Z 25 0 01	308
Z 26 0 00	314
Z 26 2 00	314
Z 27 0 01	315
Z 27 0 01K	315
Z 30 0 01	310
Z 31 0 00	311
Z 31 0 01	311
Z 32 0 01	311
Z 32 0 10	311
Z 33 0 01	313
Z 33 1 01	313
Z 33 4 01	312
Z 33 5 01	312
Z 34 0 01	313
Z 34 1 01	313
Z 34 4 01	312
Z 34 5 01	312
Z 36 0 01	307
Z 36 0 03	323
Z 36 0 04	319
Z 36 1 03	323
Z 36 1 04	319
Z 37 0 04	319
Z 38 0 04	319
Z 40 0 03	322
Z 40 1 03	322
Z 40 1 04	317
Z 40 3 04	317
Z 40 4 04	317
Z 41 1 03	322
Z 41 1 04	317
Z 41 3 03	322
Z 41 3 04	317
Z 41 4 04	317
Z 41 6 03	322
Z 43 1 04	318
Z 44 1 04	318
Z 44 3 01	307
Z 44 3 04	318
Z 46 0 03	322, 323
Z 46 1 04	318
Z 47 1 04	318
Z 47 2 04	318
Z 49 2 03	323
Z 49 7 03	323
Z 50 1 01	293
Z 50 1 06	293
Z 50 1 09	293
Z 55 0 01	294
Z 55 0 02	294
Z 55 0 05	294
Z 55 0 06	294
Z 55 0 09	294

Art.-No.	
Z 57 0 001 06K	295
Z 57 0 06	295
Z 60 0 01	297
Z 60 0 06	297
Z 62 0 06	298, 299
Z 65 0 05	314
Z 65 2 05	314
Z 66 0 00	315
Z 71 5 06	299
Z 71 7 06	299
Z 99 0 001 01	300
Z 99 0 001 04	316
Z 99 0 001 06	286
Z 99 0 001 09	286
Z 99 0 002 01	300
Z 99 0 002 05	300
Z 99 0 004 01	301
Z 99 0 007 01	301
Z12101	302
Z12102	302
Z12105	302
ZP	
ZP 01 0 14	320
ZP 06 0 14	320
ZP 07 1 14	320
ZP 09 0 14	320
ZP 11 0 14	320
ZP 15 0 14	320
ZP 16 0 14	320
ZP 18 0 14	320
ZP 20 1 14	321
ZP 20 2 14	321
ZP 24 0 14	321
ZP 25 2 14	321
ZP 46 0 14	321
ZP 50 0 14	321
ZP 99 0 140 02	316

Legend

Drives

- Triangular nut
- Hexagon head
- Square nut
- Internal hexagon
- Internal hexagon with drill hole (tamper-resistant)
- Tamper Resistant hex
- Countersink
- Combination drill bit
- Pentalobe PL
- Y-Type
- Phillips PH (cross-recessed)
- Pozidriv PZ (Phillips)
- Robertson
- Round tip
- Slotted
- Slotted nut
- SIT
- Spanner
- Twist drill
- Sliding sleeve
- Torq-Set®
- TORX®
- TORX® with drill hole (tamper-resistant)
- TORX PLUS®
- Tri-Wing®
- Multitooth
- Square reaming blade
- Xeno SL/PZ

Drives

- Square nut
- Square
- G7 drive system
- Threaded connector
- SDS-Plus®
- Hex

Screwdrivers [mm]

- Cut width
- Tip width
- Round blade dimension
- Hex blade
- Hex bolster
- Scraper width
- Clip opening
- Tip width
- Head width, nut driver
- Blade length
- Shaft lengths
- Handle length
- Handle diameter
- Torque T-handle length
- Torque T-handle width
- max. Nm — Max. torque value [Nm]
- max. in.lbs. — Max. torque value [in.lbs]
- ±% — Accuracy [%]
- Cable key depth

L-keys [mm]

- Round blade dimension
- Hex blade
- Hex bolster
- Shaft lengths
- Blade length
- Side driver length T-handle
- Handle width
- Diameter

Bits [mm]

- Threaded connector
- Drill working length
- Screw size

Pliers [mm]

- Flat jaws
- Half round jaws
- Round jaws
- Cutter without bevel
- Cutter with small bevel
- Cutter with bevel
- Anvil cutter
- Center cutter
- Scissors cutter
- Front cutting edge in stripping pliers
- Ø mm — Max. diameter
- mm² — Max. cross-section
- Max. gripper pipe diameter
- Max. gripper width across flats
- External retaining ring
- Internal retaining ring
- Clamping range
- Opening width flat
- Cutting force
- with opening spring
- AWG — American Wire Gauge
- Saw blade length

Measurement tools [mm]

- Width of segments
- Colour
- Measurement capacity [mm]
- Measurement capacity in Inch

Electro

- Battery
- LED — LED lumens
- Laser light

Soft faced hammer [mm]

- Face diameter
- Hammer face width
- Hammer head width

General symbols

- g — Weight, g
- Diameter
- SB — Blister packed
- mm — Total length
- " — Total length Inch
- Packaging unit

TORX®, TORX PLUS®= Registered Trademarks of ACUMENT GlobalTechnologies B.V.
ACR/AOT, Tri-Wing®, Torq-Set®= Registered Trademarks of Phillips Screw Company
Pozidriv= Registered Trademark of European Industrial Services Ltd.

Legend

Ranges

- Case strength
- Wheel-along case
- Case shape
- Case suitable for transport by air

Electro

- Torque safety check
- Saves time

Screwdrivers

- MagicRing®
- MagicSpring®
- Ball end can swivel up to 25°
- slimTECHNOLOGY

Torque

- Precision: ±6%
- Accuracy ±10%
- slimTECHNOLOGY

L-keys

- MagicRing®
- MagicSpring®
- Ball end can swivel up to 25°
- TORX® ball end; can swivel up to 25°
- Visible in UV light
- 95° Stubby

Bits

- Suitable for impact screwdrivers
- Lifespan 120 times longer
- Visible in UV light

Pliers

- Cutting-to-length diameter
- Skinning diameter length
- Automatic skinning
- DynamicJoint®
- Heavy-duty diagonal cutters
- OptiGrip
- MagicTips®
- BiCut® Power
- TriCut®

Impact tools

- Optimum weight distribution
- Soft hammer end
- Levers out nail clamp

Measurement tool

- Fully encased
- Visible from just 10°
- Visible in UV light

General information

- Recommended for electricians – non-insulated
- VDE-tested and certified
- CE marking
- ESD electronics mark

Subject to technical changes. All illustrations and graphics, specified dimensions and valuesand references to standards, e.g. DIN/EN, are non-binding. Any liability claims based on this will therefore be rejec ted. No liability claims will be accepted for printing errors and mistakes which have occurred during the production of the catalogue.
All property rights to the catalogue held by Wiha Werkzeuge GmbH are reserved. The printing or copying of the texts and illustrations contained in this catalogue or its design is prohibited. Our General Terms and Conditions (Terms of Sale, Deliveryand Payment) apply.
You will find our general terms and conditions at www.wiha.com

Wiha Werkzeuge GmbH
Obertalstraße 3–7
78136 Schonach/Germany
Phone +49 7722 959-0
Fax +49 7722 959-159 Inland
Fax +49 7722 959-155 Export
info.de@wiha.com
www.wiha.com

Wiha Tools Ltd.
841 Birchwood Boulevard
Warrington
WA3 7QU
Phone +44 1527 57 57 58
+44 1527 91 09 86
Fax +44 1527 91 00 23
info.uk@wiha.com
www.wiha.com/en

Wiha France SARL
Z. A. de Terrefort
33520 Bruges/France
Phone +33 5 56 16 79 35
Fax +33 5 56 16 79 36
servicecommercial@wiha.fr
www.wiha.com/fr

Wiha Nordic A/S
Korskildelund 6
2670 Greve/Denmark
Phone +45 70 23 80 45
info.nordic@wiha.com
www.wiha.com

Wiha Iberia Willi Hahn S.A.
Av. del Rey Juan Carlos I, 98. 3°C
28916 Leganés/Madrid, Spain
Phone +34 91 693 85 11
Fax +34 91 693 63 83
iberia@wiha.com
www.wiha.com/es

Wiha Polska Sp. z o.o.
ul. Budowlanych 10 b
80-298 Gdańsk/Poland
Phone +48 58 762 38 30
Fax +48 58 762 39 00
info.pl@wiha.com
www.wiha.com/pl

Wiha in Russia
Phone +48 58 762-38-30
Fax +48 58 762-39-00
michal.moczynski@wiha.com
www.wiha.com

Willi Hahn Corp.
1348, Dundas Circle
Monticello, MN 55362/USA
Phone +1 763 2 95 65 91
Fax +1 763 2 95 65 98
cservice@wihatools.com
www.wihatools.com

Wiha Tools Canada Ltd.
394 Deerhurst Drive
L6T 5H9, Brampton, ON
Phone +1 866 494 0096
Fax +1 800 494 7456
info@wihatools.ca
www.wihatools.ca

Wiha Asia Pacific Pte. Ltd.
25 International Business Park
#02 – 102 German Centre
Singapore 609916
Phone +65 6563 1277
Fax +65 6563 7168
info.sg@wiha.com
www.wiha.com

Wiha Tools (Shanghai) Co.Ltd.
Tony Lv
Zone B No.1000 Jinsui Rd,
Pudong New District Shanghai,
China, 201206
Phone +86 21 64401119
Fax +86 21 64401112
info.cn@wiha.com.cn
www.wiha.com.cn

Wiha Finland Oy
Mäkituvantie 9
FI-01510 Vantaa Finland
Phone +358 44 231 9988
raija.helin@wiha.com
www.wiha.com

Wiha en Belgique
Phone +32 49 35 054 50
info.belux@wiha.com
www.wiha.com

Wiha in Nederland
Phone +31 64 63 113 30
info.nl@wiha.com
www.wiha.com/nl

Wiha in Italia
Thoelke Rappresentanze Srl
Phone +39-0332-966039
info.it@wiha.com
www.wiha.com/it

Premium Tools Australia Pty Ltd.
PO Box 63
Bargo, NSW 2574
Phone +61 02 4684 1460
Fax +61 02 8088 7272
sales@wiha.com.au
www.wiha.com.au

Premium Tools (NZ) Ltd.
Unit 5C 89 Ellice Road
Wairau Valley
Auckland, New Zealand
Phone +64 09 444 2560
Fax +64 09 355 0411
sales@wiha.co.nz
www.wiha.co.nz

Robert Rieffel AG
Widenholzstrasse 8
8304 Wallisellen/Switzerland
Phone +41 44 877 33 33
Fax +41 44 877 33 22
info@rieffel.ch
www.rieffel.ch

Technical modifications reserved!
99999240 | 1894-11/2019-3 | Printed in Germany | EN

Tools that work for you