

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT
		DATE	

Technical characteristics:

Specifications



DIN EN 60 664-1
DIN EN 61 984

Inserts

- 01. Number of contacts :10+PE
- 02. Rated Current :16A
- 03. Rated Voltage :500V
- 04. Pollution degree :3
- 05. Rated impulse voltage :6kv¹⁰
- 06. Insulation resistance :≥10Ω
- 07. Material:Polycarbonate
- 08. Rated voltage acc. to UL/CSA:600V
- 09. Limiting temperatures : -40℃~+125℃
- 10. Flammability acc. to UL94:V0
- 11. Mechanical working life (mating cycles) :≥500

Contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Contact resistance :≤3mΩ
- 04. Terminal :Cage-clamp
- 05. Wire gauge :.0.2-2.5mm² (AWG 26-14)
- 06. Stripping length :7-9mm
- 07. Rohs Compliance

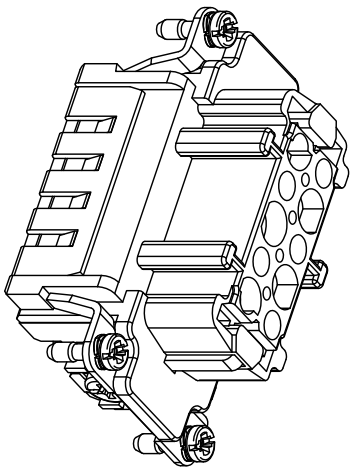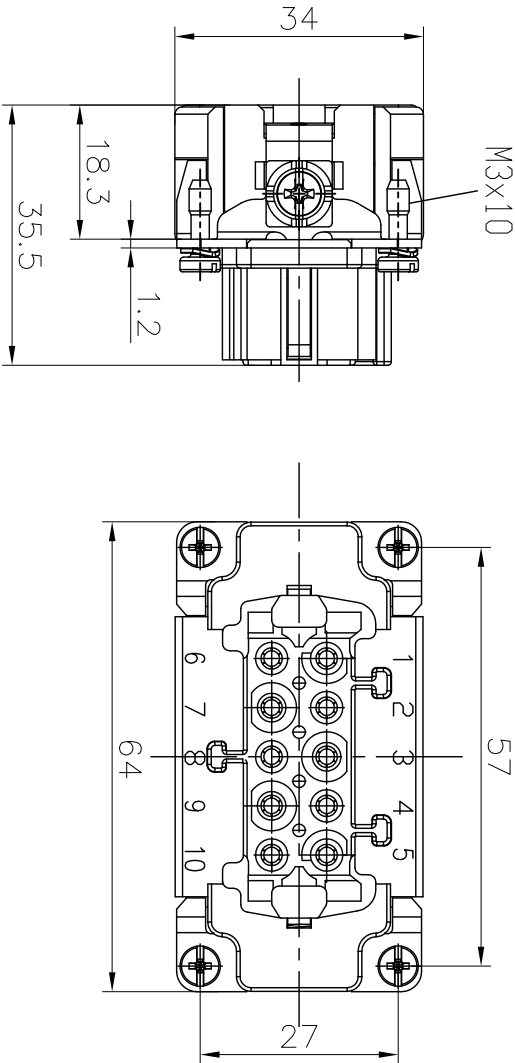

DETACHED LISTS			
PART NO.:	/	NAME:	DE-010-FS
APPO:			
CHKD:			
DRFT:	Mr. Yang 2016.08.08	TITLE:	CUSTOMER DRAWING
 THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		REV	DO
		SHEET	1/1
		SCALE	1:1