

6

5

4


3

2



1

used for:

D-SUB

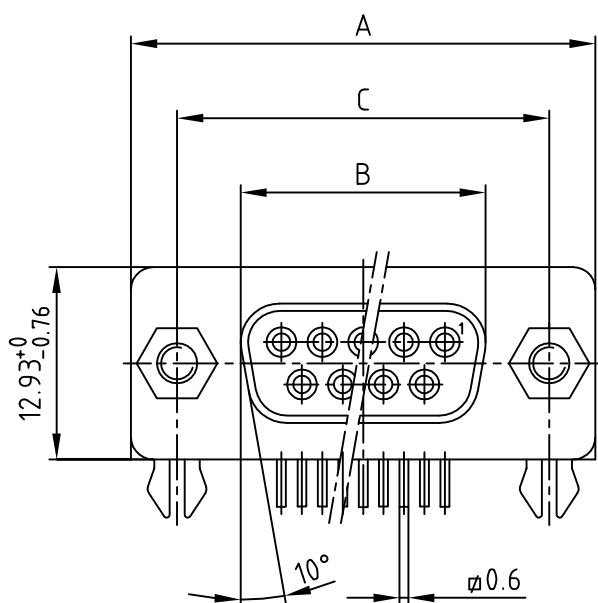

| POS. | A -0.76 | B -0.25 | C                        | Part NO.   |
|------|---------|---------|--------------------------|------------|
| 9    | 31.19   | 16.46   | 25.00 $^{+0.12}_{-0.13}$ | 302A11249X |
| 15   | 39.52   | 24.79   | 33.30 $^{+0.15}_{-0.1}$  | 302A11259X |
| 25   | 53.42   | 38.50   | 47.04 $\pm 0.13$         | 302A11269X |
| 37   | 69.70   | 54.96   | 63.50 $\pm 0.13$         | 302A11279X |

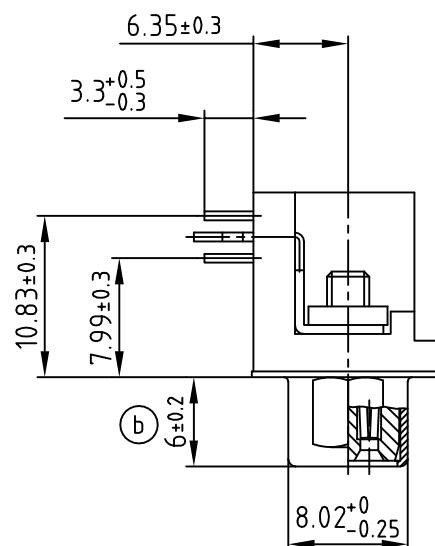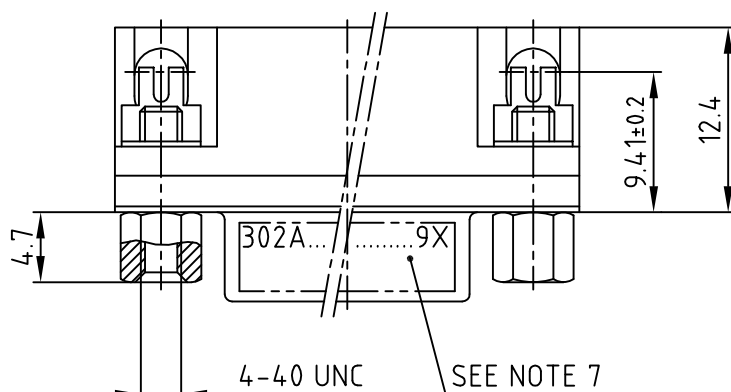

## NOTES:

- ① 1. METAL SHELLS: STEEL; NICKEL PLATED  
2. INSULATORS: PBT GF UL 94 V-0, BLACK  
3. CONTACTS: COPPER ALLOY  
PLATING: GOLD FLASH over NICKEL  
4. PCB-SNAPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL  
PCB-HOLE:  $\Phi 3.1 \pm 0.1$ ; PCB THICKNESS 1.6mm  
5. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA  
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB  
7. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR  
REPRODUCED IN ANY WAY, AND MAY NOT  
BE PASSED ON TO A THIRD PARTY WITHOUT  
WRITTEN PERMISSION.  
OWNERSHIP AND COPYRIGHT OF CONEC GmbH  
DO NOT ALTER CAD DRAWING BY HAND

|       |             |            |         | tolerance |       |        | scale:       | material:                                                                         |
|-------|-------------|------------|---------|-----------|-------|--------|--------------|-----------------------------------------------------------------------------------|
|       |             |            |         | 2003      | date  |        |              |                                                                                   |
|       |             |            |         |           | drawn | 26.05. | Lehmenkühler | title:<br>D-SUB FEMALE 90°<br>9-37pos.<br>with threaded insert, hex bolt and clip |
|       |             |            |         |           | appd. | 26.05. | Kühle        |                                                                                   |
|       |             |            |         |           | norm  |        |              |                                                                                   |
| 1 x c | Ä 5865      | 29.10.2015 | Unkrüer | d-old     |       |        |              | dwg no:<br>16K1A958                                                               |
| 1 x b | Ä 5290      | 24.07.2014 | Lehm.   |           |       |        |              |                                                                                   |
| a     | Original    |            |         |           |       |        |              |                                                                                   |
| rev.  | description | date       | name    |           |       |        |              | part no: SEE TABLE                                                                |

**CONEC**

dim. in mm

scale: 2:1

material: SEE NOTES

title:

dwg no:

part no:

DIN-A

3

sh: 1/1